



Wall-hung compact elongated toilet, dual-flush K-6918

Features

- One-piece wall-hung toilet
- Compact elongated bowl offers added comfort while occupying the same space as a round-front bowl
- Mounting hardware is completely concealed, allowing the design lines to remain intact when installed
- Includes wall-hung bowl with Memoirs seat
- 0.8 or 1.6 apf (3.0 or 6.0 lpf)
- Dual-flush flushing system

Installation

- See installation guide and installation video for more detailed information
- Pairs with the K-18829 in-wall tank and carrier system, and K-77271 Memoirs®, K-8857 Bevel®, K-4177 Droplet®, K-5413 Cue[™], K-75890 Lynk[™], and K-75891 Note[™] flush actuator plates
- Also pairs with K-6284 in-wall tank and carrier system, and K-6298 Veil® flush actuator plate
- This product is not designed or intended for bariatric use

Recommended Products/Accessories

K-23726 Drain treatment





Codes/Standards

ASME A112.19.2/CSA B45.1
ASME A112.19.14
DOE - Energy Policy Act 1992
EPA WaterSense®
California Energy Commission (CEC)
NOM Standards
NOM 008-CNA
IAPMO Certification

KOHLER® Toilets and Seats Limited Warranty


See website for detailed warranty information.







Wall-hung compact elongated toilet, dual-flush K-6918

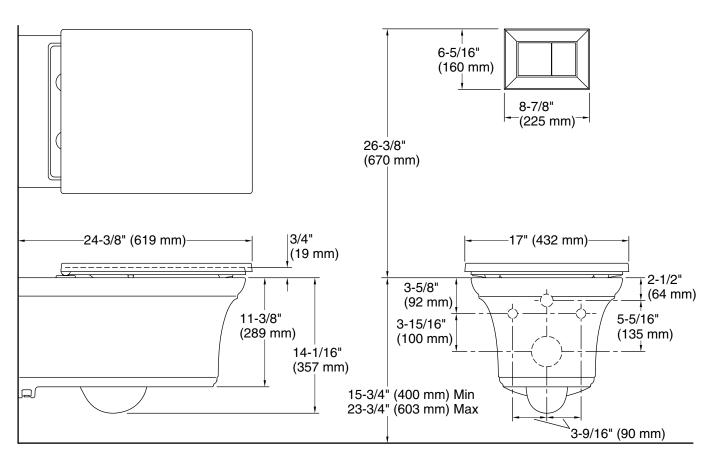

Technical Information

All product dimensions are nominal.

Toilet type: Wall-mount
Bowl shape: Elongated
Flush type: Class Five
Trap passageway: 2-9/16" (65 mm)

Water surface size: 5-1/4" x 4-1/8" (133 mm x 105 mm)

Rim to water 8-1/2" (216 mm)

surface:

Seat-mounting 6-1/8" (155 mm)

holes:

Fixture Supply Requirements

Min static pressure: 20 psi (137.9 kPa) Max static pressure: 80 psi (551.6 kPa)

Notes

Install this product according to the installation instructions.

Toilet height is dependent on carrier settings.

