

Tempered™ Rite-Temp® Bath and Shower Valve Trim K-TLS22027-4

Features

- Includes faceplate with handle, bath spout, shower arm and flange.
- Single handle controls both on/off activation and temperature settings.
- Includes diverter bath spout with slip fit connection.
- For use with any KOHLER showerhead.

Material

- Premium material construction with metal handle ensures reliability and durability.
- KOHLER finishes resist corrosion and tarnishing.

Installation

 Trim only; requires valve to complete installation (sold separately).

Required Products/Accessories

K-8304-K Valve Body & Cartridge Kit Complete

K-8304-KS Valve Body & Cartridge Kit Complete

or

K-8304-PS Valve Body & Cartridge Kit Complete

or

K-8304-PX Valve Body & Cartridge Kit Complete

or

K-8304-US Valve Body & Cartridge Kit Complete

or

K-8304-UX Valve Body & Cartridge Kit Complete

or

K-P8304-K Valve body and cartridge kit complete

or

K-P8304-KS Valve Body & Cartridge Kit Complete

or

K-P8304-SWX Valve Body & Cartridge Kit Complete

K-8300-K Valve Body Rough-In K-8305 Pressure Balance Cartridge

N-0303 i ressure Dalance Cartiluge

or

K-8300-KS Valve Body Rough-In

K-8305 Pressure Balance Cartridge

or

K-8300-PX Valve Body Rough-In

K-8305 Pressure Balance Cartridge

or

K-8300-PS Valve Body Rough-In

K-8305 Pressure Balance Cartridge


or

K-P8300-K Valve Body Rough-In

K-P8305 Pressure Balance Cartridge

or

K-P8300-KS Valve Body Rough-In





Codes/Standards

ASME A112.18.1/CSA B125.1

KOHLER® Faucet Lifetime Limited Warranty

See website for detailed warranty information.

Available Colors/Finishes


Color tiles intended for reference only.

Color	Code	Description
	CP	Polished Chrome
	SN	Vibrant® Polished Nickel
	BN	Vibrant® Brushed Nickel
	BL	Matte Black





Tempered™ Rite-Temp® Bath and Shower Valve Trim K-TLS22027-4

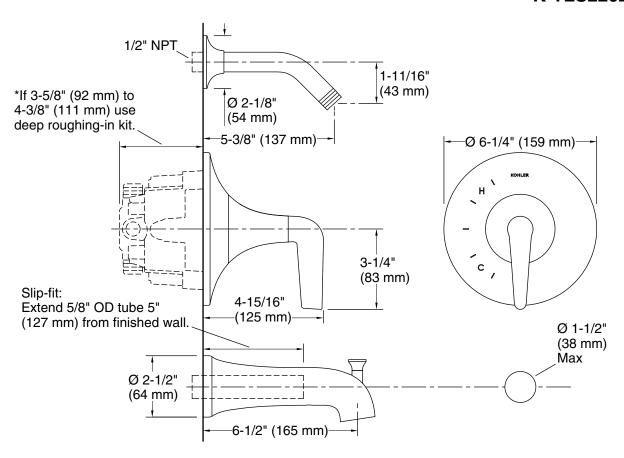

Technical Information

All product dimensions are nominal.

Notes

Install this product according to the installation instructions.

Install straight pipe or tube drop of 7" (178 mm) to 18" (457 mm) with single elbow between the valve and the wall-mount spout.

