Parallel®

KOHLER, FAUCETS Rite-Temp® shower trim kit with lever handle, 2.5 gpm K-TS23503-4

Features

- Pressure-balancing diaphragm technology maintains outlet temperature within +/-3°F during water pressure fluctuations
- Antiscald protection
- A single handle controls both on/off activation and temperature setting
- Includes single-function 2.5 gpm (9.5 lpm) showerhead with Katalyst® air-induction technology
- MasterClean[™] sprayface features an easy-to-clean surface that withstands mineral buildup
- Coordinates with other products in the Parallel collection

Material

- Premium material construction with metal handle ensures reliability and durability
- KOHLER® finishes resist corrosion and tarnishing

Technology

 Katalyst® air-induction technology infuses water with air. creating bigger drops for a more powerful spray

Installation

 Trim only; requires valve to complete installation (sold) separately)

Required Products/Accessories

K-8304 Series Rite-Temp® Valve & Cartridge Kits or


K-8300 Series Rite-Temp® Valve Body Rough-ins K-8305 Series Rite-Temp® Cartridges

Recommended Products/Accessories

K-23723 Faucet cleaner

Optional Products/Accessories

- K-10350 Deep rough-in kit
- K-10351 Test cap for K-8300 Series valve bodies
- 1307346 Retro mixer cap for K-304 Rite-Temp valve
- 1362395 Retro mixer cap for K-2971 HiFlow Rite-Temp valve



Codes/Standards

ASME A112.18.1/CSA B125.1 DOE - Energy Policy Act 1992

KOHLER® Faucet Lifetime Limited Warranty

See website for detailed warranty information.

Available Colors/Finishes


Color tiles intended for reference only.

Color	Code	Description
	CP	Polished Chrome
	AF	Vibrant® French Gold
	BN	Vibrant® Brushed Nickel
in the second	BV	Vibrant® Brushed Bronze
	BL	Matte Black
	2MB	Vibrant® Brushed Moderne Brass
	TT	Vibrant Titanium



Parallel®

KOHLER, Faucets Rite-Temp® shower trim kit with lever handle, 2.5 gpm K-TS23503-4

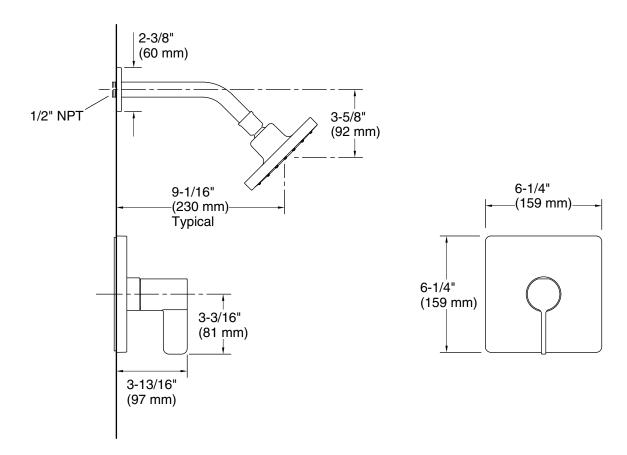

Technical Information

All product dimensions are nominal. Drain included: No

Showerhead/Body Spray:

Rated maximum 2.5 gal/min (9.5 l/min) flow: Pressure: 45 psi (3.1 bar)

Notes

Install this product according to the installation instructions.

