



**Irvine™**

60" x 32" alcove bath, right drain  
**K-26068**

### Features

- Clean, crisp lines blend into soft angles to create a uniquely sophisticated bath that works with any decor
- Integral lumbar support
- Safeguard® slip-resistant surface provides excellent traction underfoot
- Integral apron creates a clean, finished look
- Integral flange helps prevent water from seeping behind wall and simplifies alcove installation

### Material

- KOHLER® enameled cast iron

### Installation

- Alcove
- Right drain

### Recommended Products/Accessories

K-7213 27" Cable Bath Drain  
K-7259 Brass toe tap bath drain



**ADA**

### Codes/Standards







ASME A112.19.1/CSA B45.2  
ASTM F462  
ADA  
ICC/ANSI A117.1

### KOHLER® Enameled Cast Iron Bath and Shower Base Lifetime Limited Warranty

See website for detailed warranty information.

### Available Colors/Finishes

*Color tiles intended for reference only.*

| Color   | Code | Description   |
|---|------|---------------|
|  | 0    | White         |
|  | 96   | Biscuit       |
|  | NY   | Dune          |
|  | 95   | Ice™ Grey     |
|  | 58   | Thunder™ Grey |
|  | 7    | Black Black™  |


1-800-4KOHLER (1-800-456-4537)

Kohler Co. reserves the right to make revisions without notice to product specifications.


For the most current Specification Sheet, go to [www.kohler.com](http://www.kohler.com) USA or [www.kohler.ca](http://www.kohler.ca) Canada

2-14-2025 15:00 - US



THE BOLD LOOK  
OF **KOHLER®**

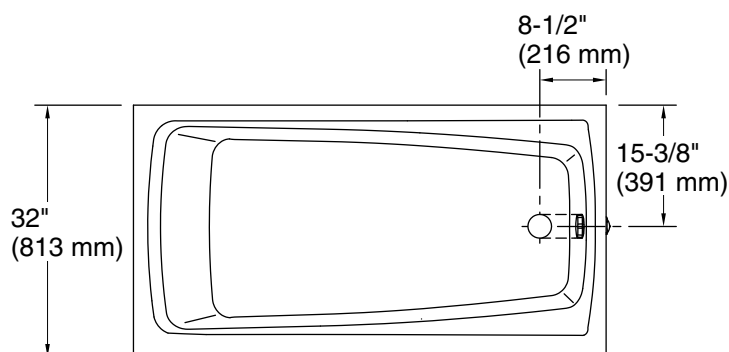

No change in measurements if connected with drain illustrated. (K-7213)



**Integral Flange Detail**

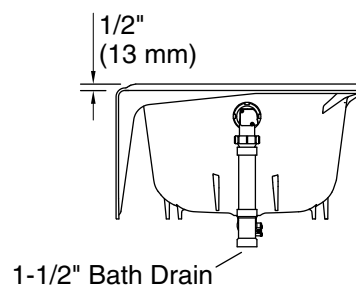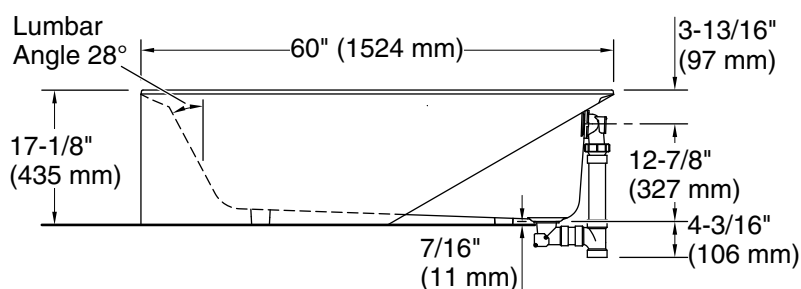

### Technical Information

All product dimensions are nominal.

|                        |   |
|------------------------|---|
| Drain location:        | Right   |
| Basin area, bottom:    | 45-3/4" x 22-1/2" (1162 mm x 572 mm)                |
| Weight:                | 322 lbs (146.1 kg)                                  |
| Minimum floor load:    | 57.8 lbs/ft <sup>2</sup> (282.2 kg/m <sup>2</sup> ) |
| Water depth:           | 10-15/16" (278 mm)                                  |
| Water capacity:        | 45 gal (170.3 L)                                    |
| Minimum flat for door: | 1-1/2" (38 mm)                                      |

### Notes

Measure your actual product for rough-in details.

Install this product according to the installation instructions.

The hot water supply should be 70% of the capacity of the bath or greater. Installations will vary.

ADA compliant when installed to the specific requirements of these regulations.