



Irvine™

60" x 32" alcove bath, left drain
K-26069

Features

- Clean, crisp lines blend into soft angles to create a uniquely sophisticated bath that works with any decor
- Integral lumbar support
- Safeguard® slip-resistant surface provides excellent traction underfoot
- Integral apron creates a clean, finished look
- Integral flange helps prevent water from seeping behind wall and simplifies alcove installation

Material

- KOHLER® enameled cast iron

Installation

- Alcove
- Left drain

Recommended Products/Accessories

K-7213 27" Cable Bath Drain
K-7259 Brass toe tap bath drain



ADA

Codes/Standards







ASME A112.19.1/CSA B45.2
ASTM F462
ADA
ICC/ANSI A117.1

KOHLER® Enameled Cast Iron Bath and Shower Base Lifetime Limited Warranty

See website for detailed warranty information.

Available Colors/Finishes

Color tiles intended for reference only.

Color	Code	Description
	0	White
	96	Biscuit
	NY	Dune
	95	Ice™ Grey
	58	Thunder™ Grey
	7	Black Black™

1-800-4KOHLER (1-800-456-4537)


Kohler Co. reserves the right to make revisions without notice to product specifications.

For the most current Specification Sheet, go to www.kohler.com USA or www.kohler.ca Canada



2-14-2025 15:00 - US

THE BOLD LOOK
OF **KOHLER®**


No change in measurements if connected with drain illustrated. (K-7213)



Integral Flange Detail

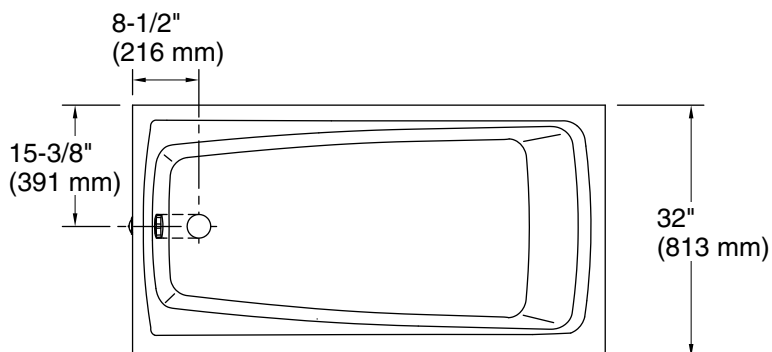

1-1/2" Bath Drain

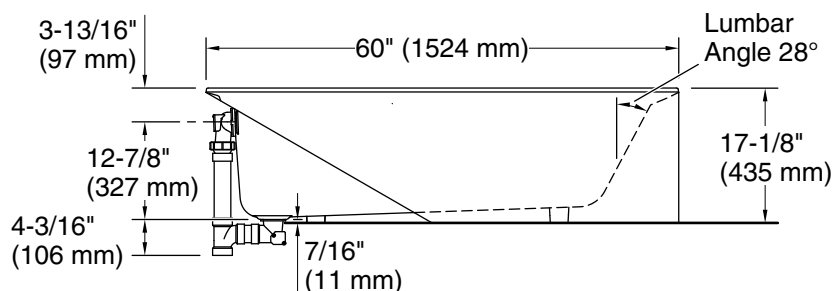

Technical Information

All product dimensions are nominal.

Drain location:	Left
Basin area, bottom:	45-3/4" x 22-1/2" (1162 mm x 572 mm)
Basin area, top:	55-1/4" x 26-3/8" (1404 mm x 670 mm)
Weight:	322 lbs (146.1 kg)
Minimum floor load:	57.8 lbs/ft ² (282.2 kg/m ²)
Water depth:	10-15/16" (278 mm)
Water capacity:	45 gal (170.3 L)
Minimum flat for door:	1-1/2" (38 mm)

Notes

Measure your actual product for rough-in details.

Install this product according to the installation instructions.

The hot water supply should be 70% of the capacity of the bath or greater. Installations will vary.

ADA compliant when installed to the specific requirements of these regulations.