KOHLER. FaucetS Bathroom sink faucet spout with Cane design, 1.2 gpm K-27008

Features

- 6" (152 mm) spout reach.
- 1.2 gpm (4.5 lpm) maximum flow rate at 60 psi (4.14 bar).
- Laminar flow delivers a graceful stream of water.
- Includes metal pop-up drain with 1-1/4" tailpiece.
- Part of the Occasion bathroom faucet and accessory collection.

Material

- Premium metal construction for durability and reliability.
- KOHLER finishes resist corrosion and tarnishing.

Installation

- For 8" 16" (203 406 mm) centers.
- Deck-mount.

Required Products/Accessories

K-27010-3 Cross bathroom sink faucet handles

K-27010-4 Lever bathroom sink faucet handles

or

K-27010-9 Knob bathroom sink faucet handles

Recommended Products/Accessories

K-23723 Faucet cleaner

K-27060 18" towel bar

K-27061 24" towel bar

K-27062 24" double towel bar

K-27063 Towel ring

K-27064 Vertical toilet paper holder

K-27065 Pivoting toilet paper holder

K-27069 Robe hook

K-27128 Toilet paper holder with tray





Codes/Standards

ASME A112.18.1/CSA B125.1

NSF/ANSI 61

NSF/ANSI 372

All applicable US Federal and State material

regulations

DOE - Energy Policy Act 1992

EPA WaterSense®

California Energy Commission (CEC)

KOHLER® Faucet Lifetime Limited Warranty

See website for detailed warranty information.


Available Colors/Finishes

Color tiles intended for reference only.

Color	Code	Description
	SN	Vibrant® Polished Nickel
	BL	Matte Black
	2MB	Vibrant® Brushed Moderne
		Brass



KOHLER. Faucets Bathroom sink faucet spout with Cane design, 1.2 gpm K-27008

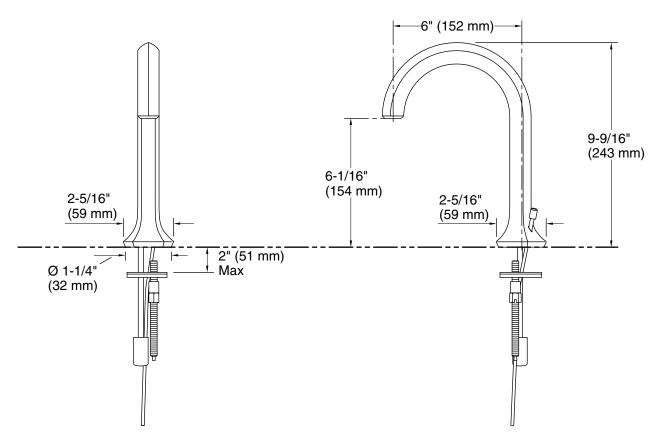

Technical Information

All product dimensions are nominal.

Faucet:

Flow rate: 1.2 gal/min (4.5 l/min)

Pressure: 60 psi (4.1 bar)

Drain included: Yes Drain with overflow: Yes

Spout:

Spout reach: 6" (152 mm)

Notes

Install this product according to the installation instructions.



KOHLER Faucets

Cross bathroom sink faucet handles K-27010-3

Features

- Two cross handles offer separate control of hot and cold
- Part of the Occasion bathroom faucet and accessory collection.
- UltraGlide® valves with dry-stem technology are designed to eliminate common leak paths and provide smooth, effortless control.

Material

- Premium metal construction for durability and reliability.
- KOHLER finishes resist corrosion and tarnishing.

Installation

- For 8" 16" (203 406 mm) centers.
- Deck-mount.
- Handles are preassembled on valves to simplify installation.

Required Products/Accessories

For above-counter installation

K-27008 Bathroom sink faucet spout with Cane design, 1.2

K-27008-K Bathroom sink faucet spout with Cane design, 1.0 ADA

K-27008-N Bathroom sink faucet spout with Cane design, 0.5 CSA B651

K-27009 Bathroom sink faucet spout with Straight design, 1.2

K-27009-K Bathroom sink faucet spout with Straight design, 1.0 gpm

K-27009-N Bathroom sink faucet spout with Straight design, 0.5 gpm

Recommended Products/Accessories

K-23723 Faucet cleaner

K-27060 18" towel bar

K-27061 24" towel bar

K-27062 24" double towel bar


K-27063 Towel ring


K-27064 Vertical toilet paper holder

K-27065 Pivoting toilet paper holder

K-27069 Robe hook

K-27128 Toilet paper holder with tray





CSA B651 ADA OBC

Codes/Standards

ASME A112.18.1/CSA B125.1

NSF/ANSI 61 NSF/ANSI 372

All applicable US Federal and State material regulations

ICC/ANSI A117.1

OBC

KOHLER® Faucet Lifetime Limited Warranty

See website for detailed warranty information.

Available Colors/Finishes


Color tiles intended for reference only.

Color	Code	Description
	CP	Polished Chrome
	SN	Vibrant® Polished Nickel
	BN	Vibrant® Brushed Nickel
	BL	Matte Black
	2MB	Vibrant® Brushed Moderne Brass
	вмв	Matte Black with Moderne Brass





Cross bathroom sink faucet handles K-27010-3

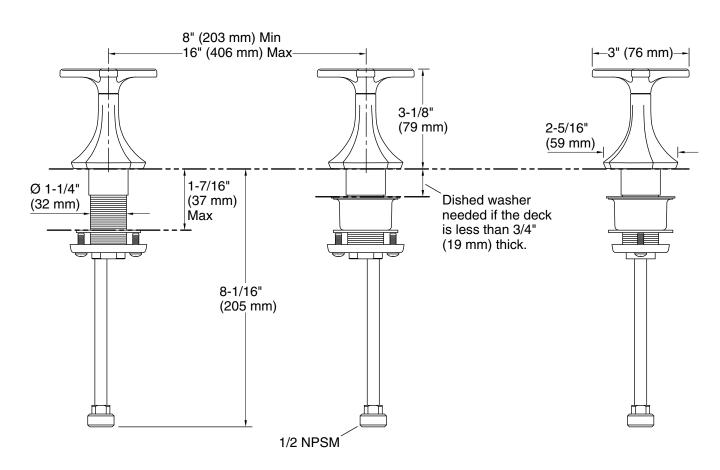

Technical Information

All product dimensions are nominal.

Faucet:

Flow rate: 1.2 gal/min (4.5 l/min)

Pressure: 60 psi (4.1 bar)

Drain included: No Drain with overflow: Yes

Notes

Install this product according to the installation instructions.

ADA, OBC, CSA B651 compliant when installed to the specific requirements of these regulations.

