

Purist® Suspend | K-29179

Ceiling-mount kitchen sink faucet

Features

- Suspended faucet delivers a minimalist design and a clean countertop footprint
- Swing arm rotates 180° for full sink coverage
- Swiveling 7' (2.14 m) braided hose extends functional reach and allows for countertop pot filling
- Two-function pull-down sprayhead with touch control allows you to switch between aerated and Sweep® sprays
- Aerated flow
- Sweep® spray provides a wide, powerful blade of water that sweeps your dishes and sink clean
- Pause feature temporarily stops the flow of water, allowing you to fill large cookware or water plants on the countertop instead of lifting it in and out of the sink
- Electronic wireless remote control paired with digitally controlled thermostatic mixing valve provides precision control of water temperature and flow
- Boost technology increases the flow rate by 30% with the press of a button
- MasterClean™ sprayface features an easy-to-clean surface that withstands mineral buildup and maximizes spray performance
- 1.5 gpm (5.7 lpm) maximum flow rate at 60 psi (4.14 bar)



Sustainability



1-800-4KOHLER (1-800-456-4537)

Kohler Co. reserves the right to make revisions without notice to product specifications.
For the most current specification sheet, go to www.kohler.com USA or www.kohler.ca Canada.
4-15-2026 6:14 - US-CA

THE BOLD LOOK
OF **KOHLER**®

Codes/Standards

ASME A112.18.1/CSA B125.1
NSF/ANSI/CAN 372
NSF/ANSI/CAN 61

Technical Information

All product dimensions are nominal.

Handle

Handle Style/ Type: Button

Flow Rate

Faucet Flow Rate: 1.5 gpm (5.7 l/min)

Valves

Included Valve: Thermostatic Mixer

Material

- Premium material construction for durability and reliability
- KOHLER finishes resist corrosion and tarnishing

Recommended Products/Accessories

K-23723 Faucet cleaner

Required Products/Accessories

- K-29180 Ceiling-mount rough-in box

Required Electrical Service

One dedicated circuit required.

Controller module: 110/220 V, 50/60 Hz

Electrical Component Ratings

Controller module:

Power Cord Length: 39.4" (1001 mm)

Warranty

See website for detailed warranty information.

KOHLER® Electronic Faucets, Valves, and Controls Five-Year Limited Warranty|KOHLER® Faucet Lifetime Limited Warranty




1-800-4KOHLER (1-800-456-4537)

Kohler Co. reserves the right to make revisions without notice to product specifications.

For the most current specification sheet, go to www.kohler.com USA or www.kohler.ca Canada.

4-15-2026 6:14 - US-CA

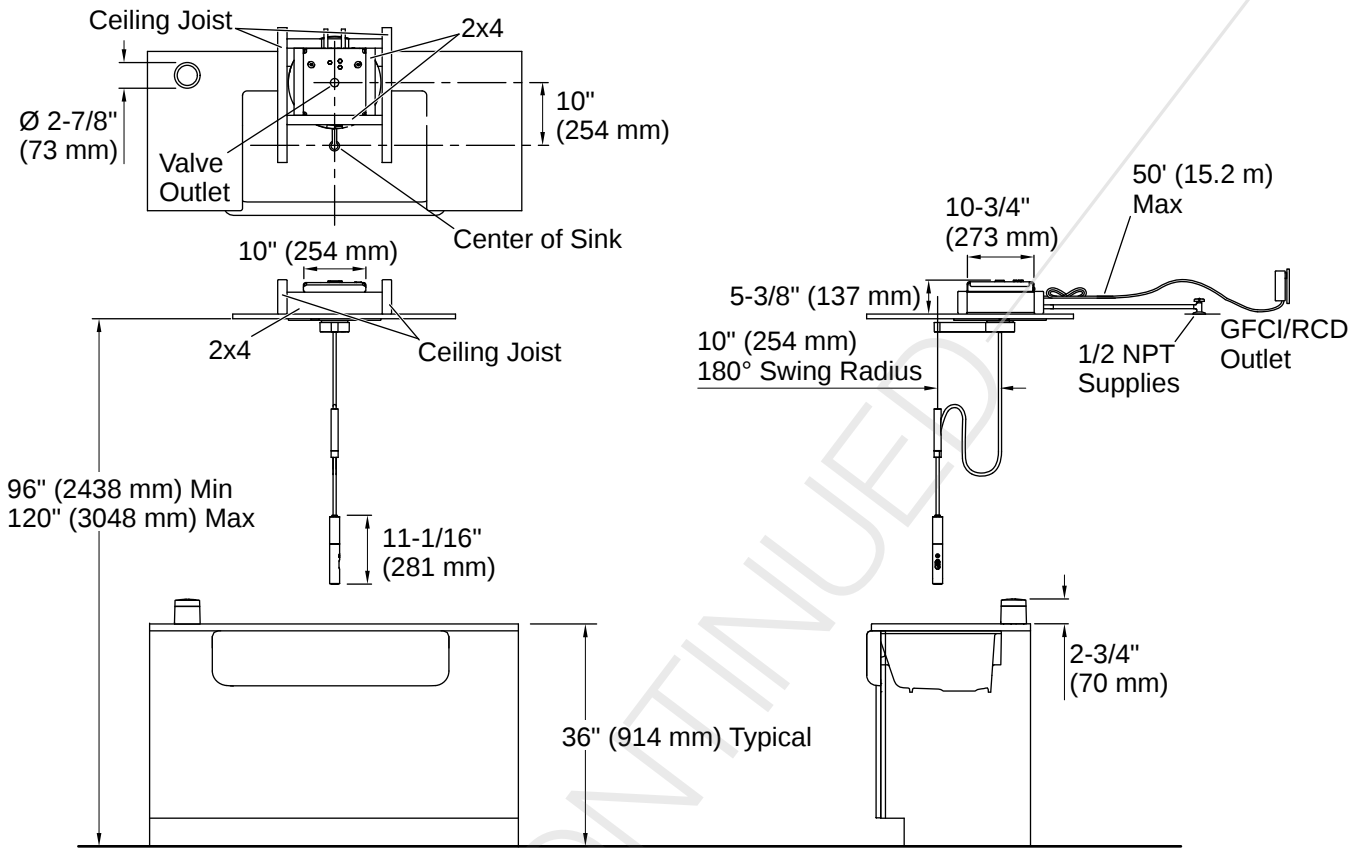

Installation

- Unit must be installed parallel to existing ceiling joists for structural integrity
- Requires zero-pitch ceiling for faucet assembly
- Requires K-29180 Rough-in Box for installation
- Recommended ceiling height of 8 -10' (2.4 - 3.1 m) for optimal user experience
- Requires placement within 26' (8 m) of faucet assembly

Installation Notes

Install this product according to the installation instructions.

This faucet should not be installed in a location where there is a vaulted ceiling.

The rough-in box must be installed in line with the ceiling joists.

Angular installation can damage the structural integrity of the ceiling joists.

Access must be provided for supply stops and electrical outlet.

The ceiling must be level.

