

**Features**

- Modern, simplistic exposed thermostatic valve serves as a hub for shower controls
- Mechanically controlled thermostatic mixing valve maintains outlet temperature throughout shower experience
- Control panel includes adjustable temperature dial with integrated adjustable high-temperature limit feature, shower outlet on/off buttons, and one filter for each outlet with space for up to four filters
- When pressed once, shower outlet turns on and button pops out, becoming a knob for water flow adjustment
- When pressed back in, water turns off and outlet button aligns with control plate surface; flow setting remains intact
- 1/2" Universal NPT and direct sweat inlets
- Requires a single-function rainhead, handshower, and hose (sold separately)

**Material**

- Premium material construction for durability and reliability
- KOHLER finishes resist corrosion and tarnishing

**Installation**

- Valve is fully serviceable from control panel

**Recommended Products/Accessories**

K-26282 Round three-function handshower, 2.5 gpm  
K-26282-G Round three-function handshower, 1.75 gpm  
K-26284 Oblong three-function handshower, 2.5 gpm  
K-26284-G Oblong three-function handshower, 1.75 gpm  
K-26294 Oblong 14" single-function rainhead, 2.5 gpm  
K-9514 60" Shower Hose

**Codes/Standards**

ASME A112.18.1/CSA B125.1  
ASSE 1016/ASME A112.1016/CSA B125.16


**KOHLER® Faucet Lifetime Limited Warranty**

See website for detailed warranty information.

**Available Colors/Finishes**

*Color tiles intended for reference only.*

| Color | Code | Description                    |
|-------|------|--------------------------------|
|       | CP   | Polished Chrome                |
|       | SN   | Vibrant® Polished Nickel       |
|       | AF   | Vibrant® French Gold           |
|       | BN   | Vibrant® Brushed Nickel        |
|       | BV   | Vibrant® Brushed Bronze        |
|       | BL   | Matte Black                    |
|       | 2MB  | Vibrant® Brushed Moderne Brass |
|       | TT   | Vibrant Titanium               |

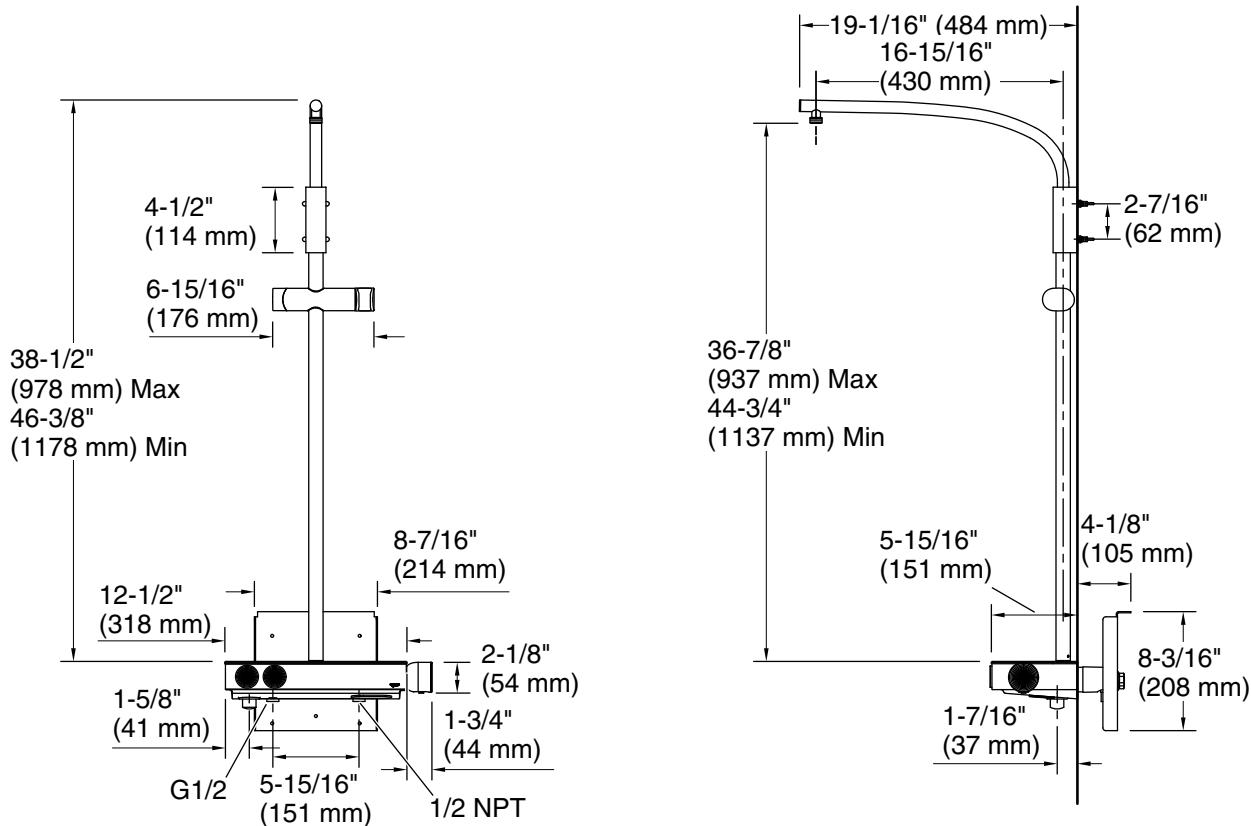

## Technical Information

All product dimensions are nominal.

### Spout:

### Shower Valve:

|                                    |                         |
|------------------------------------|-------------------------|
| Flow Rate (Max) @ 45 psi           | 5 gal/min (18.9 l/min)  |
| Manufacturer's minimum rated flow: | 1.3 gal/min (4.9 l/min) |
| Pressure:                          | 45 psi (3.1 bar)        |
| Maximum (Static) Pressure:         | 125 psi (8.6 bar)       |
| Minimum (Operating) Pressure:      | 20 psi (1.4 bar)        |