



# Mach<sup>®</sup> Tripoint<sup>®</sup> | K-10TD00K10

Touchless toilet flushometer, DC-powered, 1.0 gpf

## Features

- Water-saving 1.0 gpf (3.8 lpf) flush valve uses 22% less water than 1.28 gpf (4.8 lpf) flush valves
- Activation distance is factory-set
- Chloramine and chlorine resistance on all rubber components exposed to waterway
- Engineered for optimal performance with KOHLER<sup>®</sup> commercial fixtures
- 125-micron filter protects internal components
- High back pressure vacuum breaker
- Locking stop cap provides protection against vandalism
- No external flush volume adjustment ensures water conservation
- 24-hour automatic sentinel flush keeps trapway fresh
- Mechanical override enables flushometer to be used manually even during a power outage
- Powered by 1.5V AA lithium batteries
- Patented piston technology for superior flush volume accuracy



## Sustainability



## Available Colors/Finishes

*Color tiles intended for reference only.*

- CP Polished Chrome
- BN Vibrant Brushed Nickel
- BL Matte Black
- 2MB Vibrant Brushed Moderne Brass



1-800-4KOHLER (1-800-456-4537)  
Kohler Co. reserves the right to make revisions without notice to product specifications.  
For the most current specification sheet, go to [www.kohler.com](http://www.kohler.com) USA or [www.kohler.ca](http://www.kohler.ca) Canada.  
4-15-2026 3:28 - US-CA

THE BOLD LOOK  
OF **KOHLER**

## Codes/Standards

ADA, OBC, CSA B651 compliant when installed to the specific requirements of these regulations.

*This product should be used with a WaterSense labeled counterpart with the same rated flush volume to ensure the complete system meets the requirements of this specification for water efficiency and performance.*



ADA    CSA B651    OBC

ASME A112.18.1/CSA B125.1

ASSE 1037/ASME A112.1037/CSA B125.37

EPA WaterSense®

ADA

ICC/ANSI A117.1

CSA B651

OBC

## Warranty

See website for detailed warranty information.

KOHLER® One-Year Limited Warranty

## Valves

Included Valve:                      Volume Control

## Pressure/Fixture Supply Requirements

Minimum Flowing Pressure:      25 psi (172.4 kPa)

## Material

- Brass construction with durable Polished Chrome finish

## Recommended Products/Accessories

1421939 Extension Kit

1509698 Assembly, Fv Pressure Gauge, 1/8"

K-23723 Faucet cleaner

## Technology

- Electronic infrared sensor with Tripoint® technology for accurate activation




1-800-4KOHLER (1-800-456-4537)

Kohler Co. reserves the right to make revisions without notice to product specifications.

For the most current specification sheet, go to [www.kohler.com](http://www.kohler.com) USA or [www.kohler.ca](http://www.kohler.ca) Canada.

4-15-2026 3:28 - US-CA

\*10-3/4" (273 mm) minimum with a 6" (152 mm) critical level above the fixture

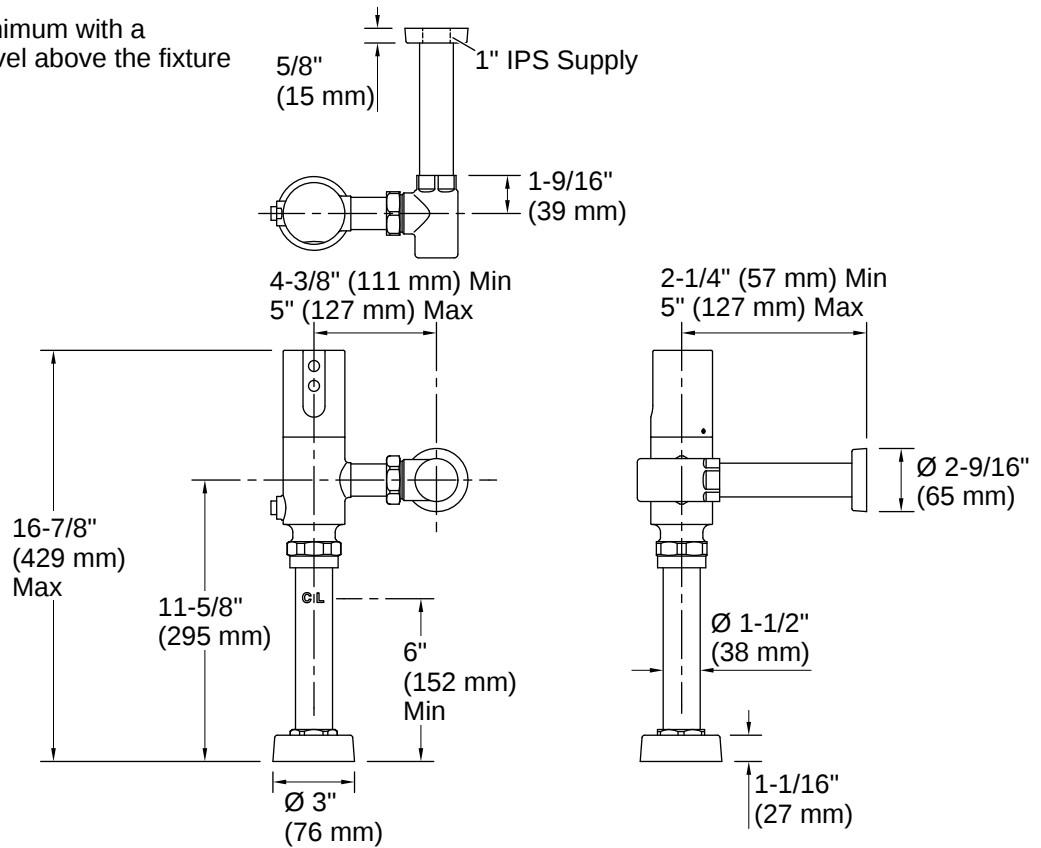

## Installation

- Intended for toilet installations with 1-1/2" (38 mm) top spud coupling connection

## Installation Notes

*Install this product according to the installation instructions.*

This product should be used with a WaterSense labeled counterpart with the same rated flush volume to ensure the complete system meets the requirements of this specification for water efficiency and performance.

ADA, OBC, CSA B651 compliant when installed to the specific requirements of these regulations.

