



Honesty® | K-26273-G

Showering kit, 1.75 gpm

Features

- Shift+® Square multifunction handshower offers full coverage and targeted massage spray options
- 8" (203 mm) Honesty® rainhead with a full coverage spray and an adjustable ball joint for precise spray adjustment
- 1.75 gpm (6.6 lpm) maximum flow rate
- Handshower contains flow-regulating check valve for backflow prevention
- Awaken® wall-mount supply elbow with check valve
- Right-angle shower arm and flange
- 27" (686 mm) sidebar length offers a custom shower at various heights
- Box includes: 8" rainhead, rainhead arm, handshower, 60" metal shower hose, adjustable sidebar with handshower mounting bracket, wall-mount supply elbow, and Rite-Temp valve trim
- Valve sold separately
- This product can help a building earn Water Efficiency points in LEED® Green Building Rating System



Sustainability



Available Colors/Finishes

Color tiles intended for reference only.

- CP Polished Chrome
- BL Matte Black
- 2MB Vibrant Brushed Moderne Brass



1-800-4KOHLER (1-800-456-4537)
Kohler Co. reserves the right to make revisions without notice to product specifications.
For the most current specification sheet, go to www.kohler.com USA or www.kohler.ca Canada.
4-15-2026 6:7 - US-CA

THE BOLD LOOK
OF **KOHLER**

Codes/Standards



ASME A112.18.1/CSA B125.1
DOE - Energy Policy Act 1992
EPA WaterSense®
California Energy Commission (CEC)

Warranty

See website for detailed warranty information.

KOHLER® Faucet Lifetime Limited Warranty

Technical Information

All product dimensions are nominal.

Handle

Handle Style/ Type: Lever

Flow Rate

Shower/Rainhead Rated 1.75 gpm (6.6 l/min)

Maximum Flow:

Handshower Rated Maximum 1.75 gpm (6.6 l/min)

Flow:

Valves

Required Valve: Pressure Balance

Material

- Premium material construction with metal handle ensures reliability and durability
- KOHLER finishes resist corrosion and tarnishing


Recommended Products/Accessories

K-23723 Faucet cleaner

Required Products/Accessories

- K-11748 Series Rite-Temp® Valves



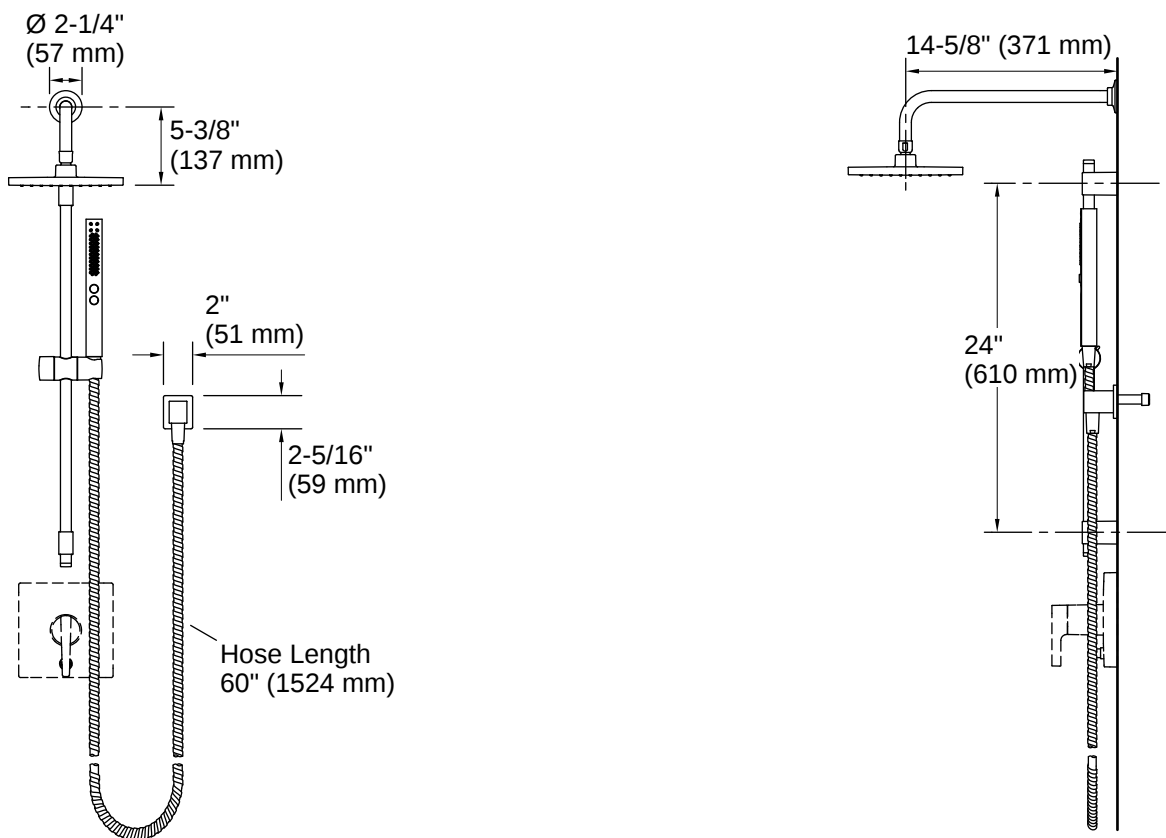

Installation

- Wall-mount

Installation Notes

Install this product according to the installation instructions.

