

24" three-function handshower kit, 2.5 gpm K-35950-Y

Features

- Advanced spray engine provides three alternate experiences: wide coverage, intense drenching, and targeted spray
- Wide coverage spray produces an encompassing spray for everyday use
- Intense drenching spray delivers a forceful spray ideal for rinsing shampoo from hair
- Targeted spray is a focused stream for targeting sore muscles or use as a utility spray
- Thumb tab allows for a smooth transition between sprays
- Combination of balance, weight, grip, and angle makes this handshower comfortable and easy to use
- MasterClean[™] sprayface features an easy-to-clean surface that withstands mineral buildup and maximizes spray performance
- 2.5 gpm (9.5 lpm) handshower maximum flow rate at 80 psi (5.5 bar)
- 24" (609 mm) slidebar features adjustable mounting brackets for installation flexibility
- Box includes: Handshower, 24" slidebar with mounting brackets, 60" (1524 mm) metal hose
- Coordinates with other products in the Bellera collection

Material

KOHLER[®] finishes resist corrosion and tarnishing

Included Components

K-35949-Y Three-function handshower, 2.5 gpm K-98341BR Slidebar, 610mm



Codes/Standards

ASME A112.18.1/CSA B125.1 DOE - Energy Policy Act 1992 IAPMO Certification

KOHLER[®] Faucet Lifetime Limited Warranty

See website for detailed warranty information.

Available Colors/Finishes

Color tiles intended for reference only.

Color Code Description



CP Polished Chrome

BN Vibrant® Brushed Nickel

BL Matte Black


1-800-4KOHLER (1-800-456-4537) Kohler Co. reserves the right to make revisions without notice to product specifications. For the most current Specification Sheet, go to <u>www.kohler.com</u> USA or <u>www.kohler.ca</u> Canada 6-28-2024 22:51 - US




Bellera®

KOHLER, Faucets

24" three-function handshower kit, 2.5 gpm K-35950-Y

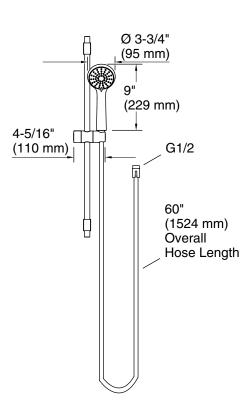

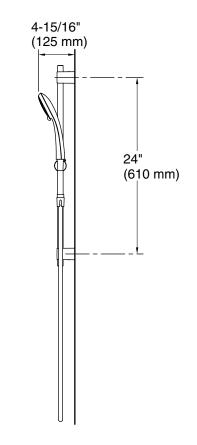

Technical Information

All product dimensions are nominal.

Drain included:

Handshower:

Rated maximum 2.5 gal/min (9.5 l/min) flow:

No

Notes

For use with automatic compensating valves rated at 1.2 gal/min (4.5 l/min) or less. Install this product according to the installation guide.

