

Two-hole wall-mount bridge kitchen sink faucet K-28666-9

### Features

- Rotating spout
- Two round handles offer separate control of hot and cold water
- KOHLER<sup>®</sup> ceramic disc valves exceed industry longevity standards for a lifetime of durable performance
- 1.5 gpm (5.7 lpm) maximum flow rate at 60 psi (4.14 bar)
- Coordinates with other products in the Billet<sup>™</sup> collection

### Material

- Premium metal construction for durability and reliability
- KOHLER finishes resist corrosion and tarnishing

# Installation

Wall-mount



# **Codes/Standards**

ASME A112.18.1/CSA B125.1 NSF/ANSI/CAN 61 NSF/ANSI/CAN 372 DOE - Energy Policy Act 1992 California Energy Commission (CEC)

# KOHLER<sup>®</sup> Faucet Lifetime Limited Warranty

See website for detailed warranty information.

# **Available Colors/Finishes**

Color tiles intended for reference only.

#### **Color Code Description**


|   | CP  | Polished Chrome                   |
|---|-----|-----------------------------------|
|   | SN  | Vibrant® Polished Nickel          |
|   | AF  | Vibrant® French Gold              |
|   | VS  | Vibrant® Stainless                |
|   | BV  | Vibrant® Brushed Bronze           |
|   | BL  | Matte Black                       |
|   | 2MB | Vibrant® Brushed Moderne          |
|   | BMB | Brass<br>Matte Black with Moderne |
| - |     | Brass                             |
|   | TT  | Vibrant Titanium                  |



# Billet™

# **KOHLER**, Faucets

Two-hole wall-mount bridge kitchen sink faucet K-28666-9

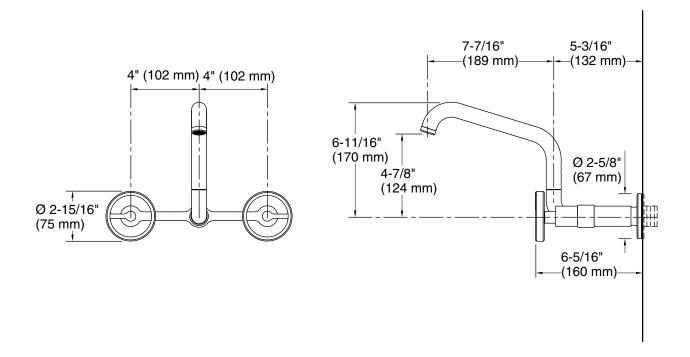

# **Technical Information**

All product dimensions are nominal. Faucet flow rate: 1.5 gal/min (5.7 l/min)

#### Spout:

Spout reach: 7-3/8" (188 mm)

#### Notes

Install this product according to the installation instructions.

