



Anthem® | K-28210

Three-port digital thermostatic valve

Features

- Digitally controlled thermostatic mixing valve
- Antiscald protection
- Built-in temperature and flow control
- Selecting "low flow" mode on setup limits total flow to 1.75 gpm (6.6 lpm) for installations where water conservation or CEC-compliance is desired
- Use with the KOHLER Konnect® app to unlock additional Anthem system features, Kohler-developed experiences, and system updates
- Up to 12 gpm (45.4 lpm) flow rate at 45 psi (3.1 bar) with maximum flow of 9.5 gpm (36 lpm) from one outlet
- Three independently controllable 1/2" (13 mm) outlets with brass tube connections
- 1/2" (13 mm) inlets with brass tube connections



Available Colors/Finishes

Color tiles intended for reference only.

^{NA} NA Not Applicable



1-800-4KOHLER (1-800-456-4537)
Kohler Co. reserves the right to make revisions without notice to product specifications.
For the most current specification sheet, go to www.kohler.com USA or www.kohler.ca Canada.
4-22-2026 10:9 - US-CA

THE BOLD LOOK
OF **KOHLER**®

Codes/Standards

ASME A112.18.1/CSA B125.1
 ASSE 1016/ASME A112.1016/CSA B125.16
 UL 1951
 CSA C22.2 No. 14
 CSA C22.2 No. 68
 cUL Listed
 UL Listed

Valves

Included Valves: Digital, Thermostatic Mixer, Volume Control

Shower Valve

Flow Rate Maximum @ 45 psi: 12 gpm (45.4 l/min)
 Manufacturer's Minimum Rated Flow: 0.9 gpm (3.4 l/min)
 Pressure: 45 psi (3.1 bar)
 Maximum Static Pressure: 125 psi (8.6 bar)
 Minimum Operating Pressure: 15 psi (1 bar)

Pressure/Fixture Supply Requirements

Minimum Flowing Pressure: 15 psi (103.4 kPa)
 Minimum Flow Rate: 0.9 gpm (3.4 l/min)

Material

- Reinforced engineering-grade thermoplastic body

Connectivity



The BLUETOOTH® word mark and logos are registered trademarks owned by Bluetooth SIG, Inc. and any use of such marks by Kohler Co. is under license.

Amazon, Alexa and all related logos are trademarks of Amazon, Inc. or its affiliates.

Google, Google Home and Google Play are trademarks of Google LLC.

Required Electrical Service

One circuit required, protected with Class A Ground-Fault Circuit-Interrupter (GFCI). Outside North America, this device may be known as a Residual Current Device (RCD).

Thermostatic valve: 120 V, 1 A, 60 Hz

Electrical Component Ratings

Thermostatic valve: 120 V, 1 A, 60 Hz


Cables: Data: 32 ft. (9.8 m)

Warranty

See website for detailed warranty information.

KOHLER® Electronic Faucets, Valves, and Controls Five-Year Limited Warranty



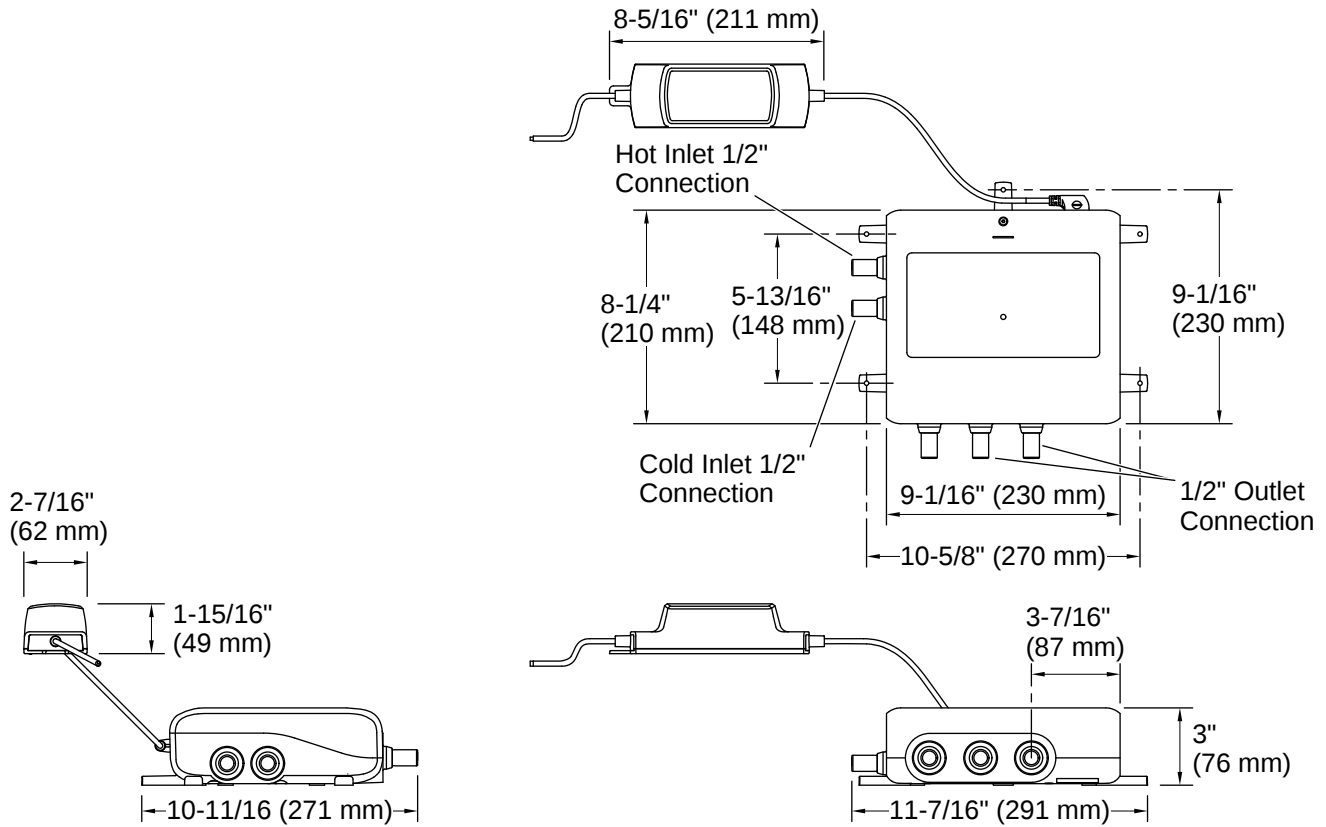

Installation

- Install valve approximately 32' (9754 mm) away from the digital control (cable supplied with control)
- Mounts within standard 2" x 4" (38 x 102 mm) walls
- Prewired with two-prong plug for connection to 120 V GFCI receptacle
- After digital control is connected to valve and power source, follow on-screen prompts for easy setup; no Internet needed. (Digital control sold separately)

Installation Notes

Install this product according to the installation instructions.

Ports should be tied together in the event a port is not utilized. Do NOT cap any port.

For use with showerheads or handsprays rated at 0.9 gal/min (3.4 l/min) or higher.





Anthem+™ | K-28214-ASC

Digital control

Features

- Digital control with easy-to-read icons and configurable touch screen
- Control steam along with temperature and flow for up to 12 shower outlets from a simple, intuitive interface
- Turn the large KOHLER® dial for easy temperature and flow rate adjustment
- Nine user-definable presets let you save your favorite shower settings
- Use with the KOHLER Konnect® app to unlock additional Anthem system features, Kohler-developed experiences, and system updates
- System warm-up and pause feature
- Includes optional flow restrictor, limiting total flow to 1.75 gpm (6.6 lpm), for installations where water conservation or CEC compliance is desired
- Connect up to four controls within your digital shower system
- Pair with optional Anthem remote on/off button; sold separately
- Requires Anthem+ system controller module and an Anthem digital thermostatic valve (sold separately)



Available Colors/Finishes

Color tiles intended for reference only.

- CP Polished Chrome
- SN Vibrant Polished Nickel
- AF Vibrant French Gold
- BN Vibrant Brushed Nickel
- BV Vibrant Brushed Bronze
- BL Matte Black
- 2MB Vibrant Brushed Moderne Brass
- TT Vibrant Titanium
- BGP Vibrant Brushed Graphite



1-800-4KOHLER (1-800-456-4537)

Kohler Co. reserves the right to make revisions without notice to product specifications.
For the most current specification sheet, go to www.kohler.com USA or www.kohler.ca Canada.
4-15-2026 2:12 - US-CA

THE BOLD LOOK
OF **KOHLER**®

Codes/Standards

ADA compliant when installed to the specific requirements of these regulations.

ADA

CSA C22.2 No. 14

CSA C22.2 No. 68

ADA

ICC/ANSI A117.1

Valves

Required Valves: Digital, Thermostatic

Material

- Premium material construction for durability and reliability
-

Recommended Products/Accessories

K-28213 Remote on/off button for digital thermostatic valve

Warranty

See website for detailed warranty information.

KOHLER® Electronic Faucets, Valves, and Controls Five-Year Limited Warranty




1-800-4KOHLER (1-800-456-4537)

Kohler Co. reserves the right to make revisions without notice to product specifications.

For the most current specification sheet, go to www.kohler.com USA or www.kohler.ca Canada.

4-15-2026 2:12 - US-CA

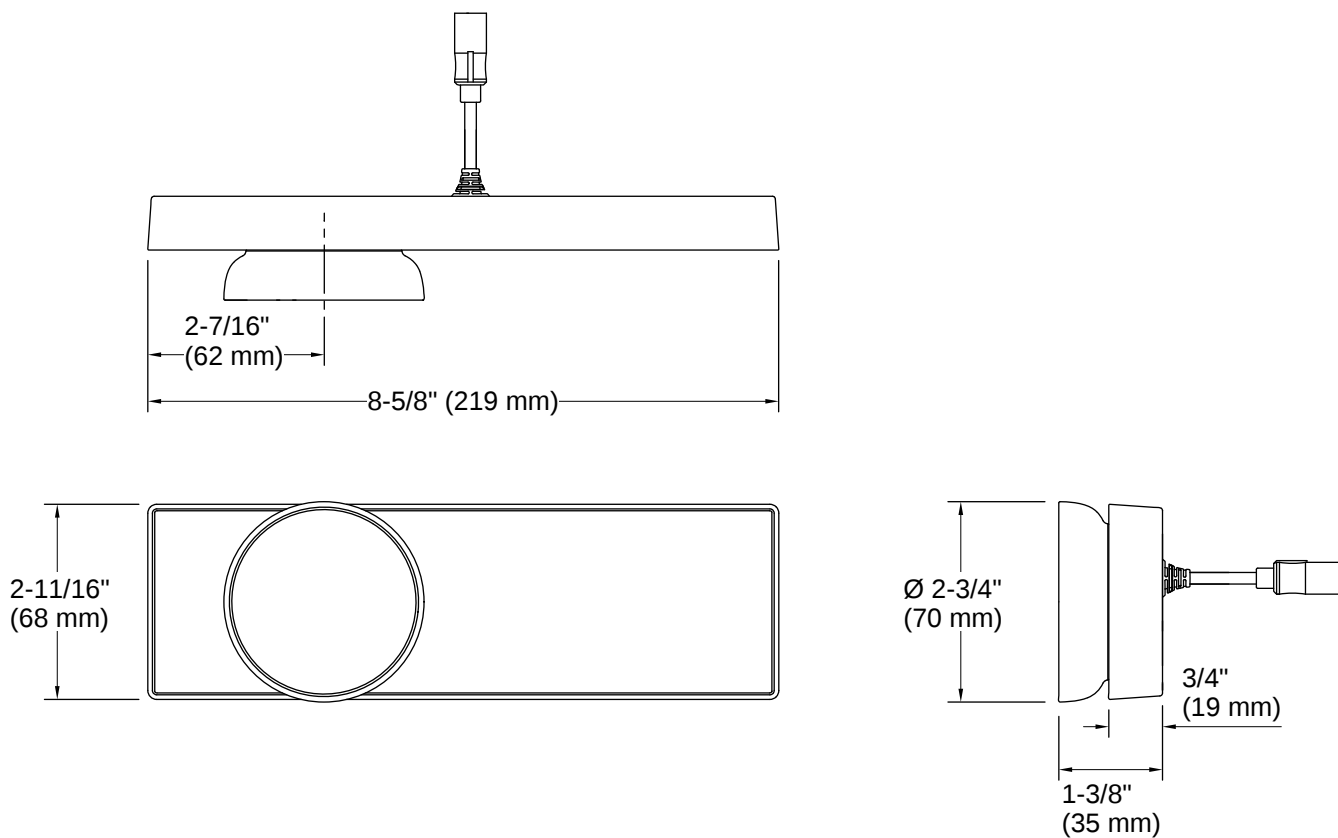

Installation

- After digital control is connected to system controller, valve, and power source, follow on-screen prompts for easy setup; no Internet needed
- Wall-mount

Installation Notes

Install this product according to the installation instructions.

ADA compliant when installed to the specific requirements of these regulations.





Purist® | K-965-AK

Single-function showerhead, 2.5 gpm

Features

- Optimized sprayface with 66 nozzles delivers a more focused coverage of large water droplets
- Minimizes wasteful overspray and increases cleaning and hair-rinsing performance
- MasterClean™ sprayface features an easy-to-clean surface that withstands mineral buildup and maximizes spray performance
- 2.5 gpm (9.5 lpm) maximum flow rate
- 1/2" NPT connection
- Coordinates with Purist faucets, accessories, and showering components to complete your bathroom



Available Colors/Finishes

Color tiles intended for reference only.

- PB Vibrant Polished Brass
- BL Matte Black



1-800-4KOHLER (1-800-456-4537)
Kohler Co. reserves the right to make revisions without notice to product specifications.
For the most current specification sheet, go to www.kohler.com USA or www.kohler.ca Canada.
4-14-2026 2:8 - US-CA

THE BOLD LOOK
OF **KOHLER**

Codes/Standards

ASME A112.18.1/CSA B125.1
DOE - Energy Policy Act 1992

Technical Information

All product dimensions are nominal.

Flow Rate

Shower/Rainhead Rated 2.5 gpm (9.5 l/min)

Maximum Flow:

Material

- KOHLER finishes resist corrosion and tarnishing
-

Recommended Products/Accessories

K-23723 Faucet cleaner

Technology


- Katalyst® air-induction technology infuses water with air, creating bigger drops for a more powerful spray
-

Warranty

See website for detailed warranty information.

KOHLER® Faucet Lifetime Limited Warranty



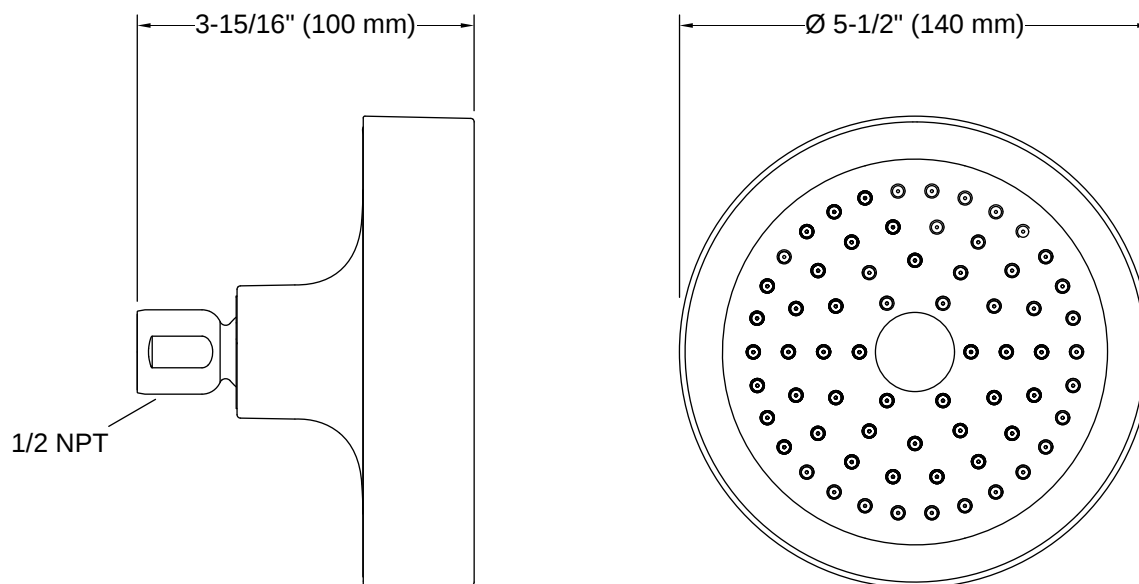

Installation

- Shower arm and flange sold separately
- Wall-mount

Installation Notes

Install this product according to the installation instructions.

For use with automatic compensating valves rated at 2.4 gal/min (9.1 l/min) or less.



Purist® | K-933

Shower arm and flange

Features

- Fluid design lines for ease of cleaning
- For use with any KOHLER showerhead (sold separately)
- Metal construction



Sustainability



Available Colors/Finishes

Color tiles intended for reference only.

- CP Polished Chrome
- SN Vibrant Polished Nickel
- AF Vibrant French Gold
- BN Vibrant Brushed Nickel
- BV Vibrant Brushed Bronze
- BL Matte Black
- 2MB Vibrant Brushed Moderne Brass
- TT Vibrant Titanium
- BGP Vibrant Brushed Graphite



Codes/Standards

ASME A112.18.1/CSA B125.1

Recommended Products/Accessories


K-23723 Faucet cleaner

Warranty

See website for detailed warranty information.

KOHLER® Faucet Lifetime Limited Warranty



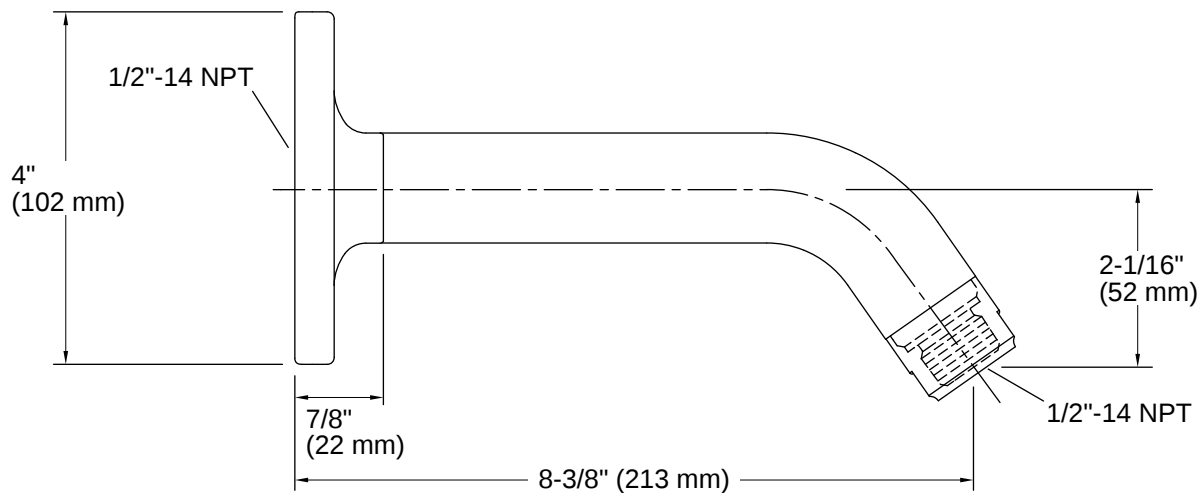

Installation

- 1/2" -14 NPT connection

Installation Notes

Install this product according to the installation instructions.





Purist® | K-22178

30" four-function handshower kit, 2.5 gpm

Features

- Includes Purist® 2.5-gpm multifunction handshower, 60" metal hose, 28" slidebar and contemporary slidebar trim
- Multifunction showerhead and handshower each have advanced spray engines to provide three experiences: full coverage, pulsating massage, and silk spray
- Full coverage spray produces an encompassing spray ideal for everyday use
- Pulsating massage spray targets sore muscles to ease away aches and pains
- Silk spray releases a dense, luxurious spray ideal for rinsing
- Thumb tab allows for a smooth transition between sprays
- Combination of balance, weight, grip, and angle makes this handshower comfortable and easy to use
- MasterClean™ sprayface features an easy-to-clean surface that withstands mineral buildup and maximizes spray performance
- 2.5 gpm (9.5 lpm) maximum flow rate
- Slidebar features adjustable mounting brackets for installation flexibility
- Coordinates with Purist®, Stillness®, and Composed® faucets and accessories
- Features a nonpositive shutoff: water-saving pause mode to temporarily reduce water flow
- Pause feature temporarily pauses water flow to conserve water while you lather, shave, or shampoo



Available Colors/Finishes

Color tiles intended for reference only.

- CP Polished Chrome
- SN Vibrant Polished Nickel
- AF Vibrant French Gold
- BN Vibrant Brushed Nickel
- BV Vibrant Brushed Bronze
- BL Matte Black
- 2MB Vibrant Brushed Moderne Brass
- TT Vibrant Titanium
- BGP Vibrant Brushed Graphite



1-800-4KOHLER (1-800-456-4537)

Kohler Co. reserves the right to make revisions without notice to product specifications.
For the most current specification sheet, go to www.kohler.com USA or www.kohler.ca Canada.
4-15-2026 5:26 - US-CA

THE BOLD LOOK
OF **KOHLER**

Codes/Standards

ADA compliant when installed to the specific requirements of these regulations.

IMPORTANT: Product meets the Americans with Disability Act (ADA) and ICC A117.1 (specifically section 608.5) if installed properly with an adapter that enables a non-positive shut off. Please see the KOHLER Statement® ADA handshower hose adapter in the recommended products section.

ADA

ASME A112.18.1/CSA B125.1
DOE - Energy Policy Act 1992
ADA
ICC/ANSI A117.1

Technical Information

All product dimensions are nominal.

Flow Rate

Handshower Rated Maximum 2.5 gpm (9.5 l/min)

Flow:

Material

- KOHLER finishes resist corrosion and tarnishing
-

Recommended Products/Accessories

K-23723 Faucet cleaner

Warranty

See website for detailed warranty information.

KOHLER® Faucet Lifetime Limited Warranty





Purist® Stillness® | K-22172

Wall-mount supply elbow with check valve

Features

- For use with a handshower and hose (sold separately)
- Includes check valve for backflow prevention
- Coordinates with Purist® and Stillness® faucets and accessories



Available Colors/Finishes

Color tiles intended for reference only.

- CP Polished Chrome
- SN Vibrant Polished Nickel
- AF Vibrant French Gold
- BN Vibrant Brushed Nickel
- BV Vibrant Brushed Bronze
- BL Matte Black
- 2MB Vibrant Brushed Moderne Brass
- TT Vibrant Titanium
- BGP Vibrant Brushed Graphite



1-800-4KOHLER (1-800-456-4537)
Kohler Co. reserves the right to make revisions without notice to product specifications.
For the most current specification sheet, go to www.kohler.com USA or www.kohler.ca Canada.
4-15-2026 3:2 - US-CA

THE BOLD LOOK
OF **KOHLER**

Codes/Standards

ASME A112.18.1/CSA B125.1

Material

- Brass
 - KOHLER finishes resist corrosion and tarnishing
-

Recommended Products/Accessories

K-23723 Faucet cleaner

Warranty

See website for detailed warranty information.


KOHLER® Faucet Lifetime Limited Warranty



1-800-4KOHLER (1-800-456-4537)

Kohler Co. reserves the right to make revisions without notice to product specifications.
For the most current specification sheet, go to www.kohler.com USA or www.kohler.ca Canada.

4-15-2026 3:2 - US-CA

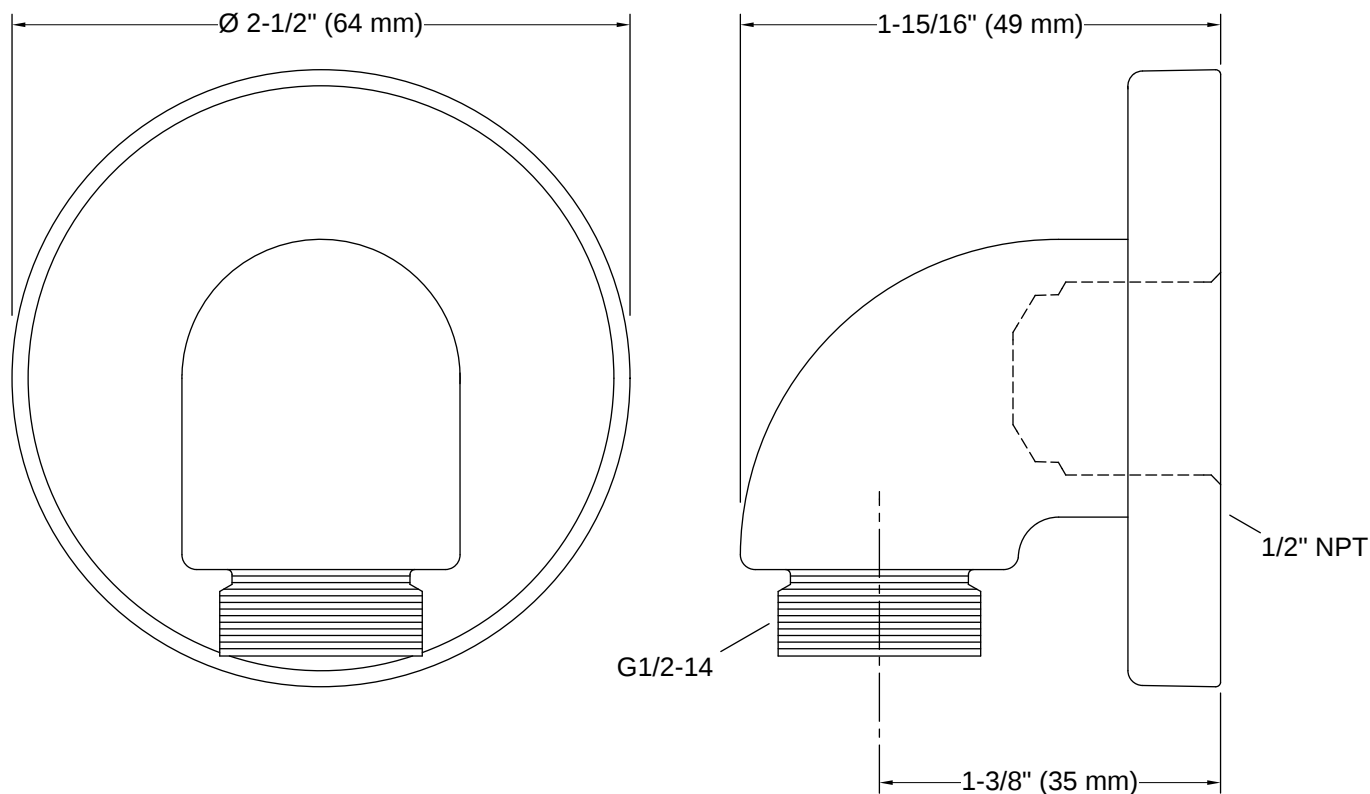

Installation

- Wall-mount

Installation Notes

Install this product according to the installation instructions.



WaterTile® | K-8013-AK

Round 27-nozzle single-function body spray, 2.0 gpm

Features

- MasterClean™ sprayface features an easy-to-clean surface that withstands mineral buildup and maximizes spray performance
- 1/2" NPT connection
- Single-function 27-nozzle body spray delivers a stimulating spray
- Fully adjustable sprayface pivots for targeted hydromassage
- Low-profile design complements any decor
- 2.0 gpm (7.6 lpm) maximum flow rate at 80 psi (5.5 bar)
- 1/2" NPT connection



Sustainability



Available Colors/Finishes

Color tiles intended for reference only.

- CP Polished Chrome
- SN Vibrant Polished Nickel
- AF Vibrant French Gold
- BN Vibrant Brushed Nickel
- BV Vibrant Brushed Bronze
- BL Matte Black
- 2MB Vibrant Brushed Moderne Brass
- TT Vibrant Titanium
- BGP Vibrant Brushed Graphite



1-800-4KOHLER (1-800-456-4537)

Kohler Co. reserves the right to make revisions without notice to product specifications.
For the most current specification sheet, go to www.kohler.com USA or www.kohler.ca Canada.
4-15-2026 3:3 - US-CA

Codes/Standards

ASME A112.18.1/CSA B125.1
DOE - Energy Policy Act 1992

Material

- KOHLER finishes resist corrosion and tarnishing
 - Premium metal construction for durability and reliability
-

Recommended Products/Accessories

K-23723 Faucet cleaner

Technology



- Katalyst® air-induction technology infuses water with air, creating bigger drops for a more powerful spray
-

Warranty

See website for detailed warranty information.

KOHLER® Faucet Lifetime Limited Warranty



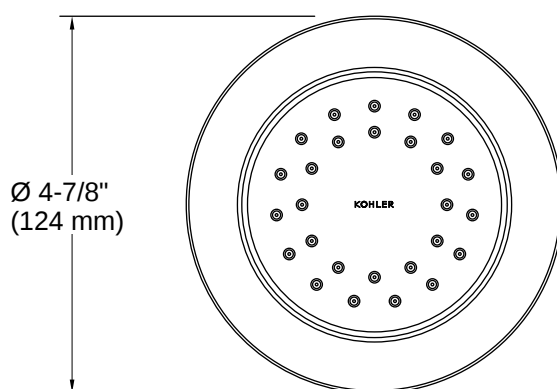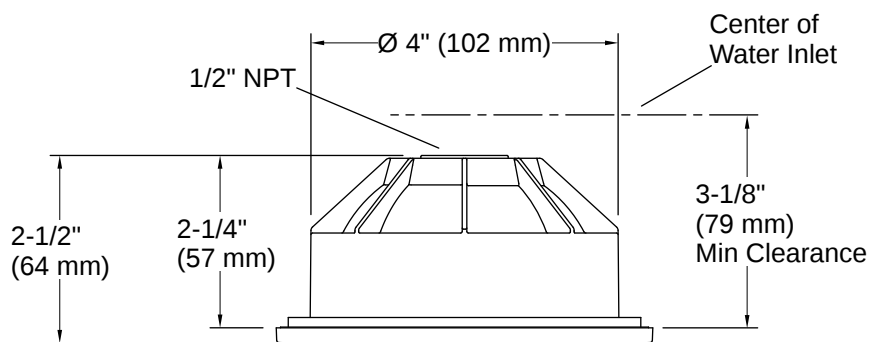

Installation

- Ceiling- or wall-mount

Installation Notes

Install this product according to the installation instructions.



Anthem+™ | K-27756

System controller module

Features

- Provides power to the digital control and manages other connected system devices
- Integrated web pages for system set up and configuration using a computer or mobile device connected via router or home network
- Automatically checks for software updates (with internet access)
- Two ports for connecting digital valve(s)
- Four ports for system component connections; four ports for Anthem+ digital control connections
- One Ethernet port for hardwire connection to home network, or connect via built-in Wi-Fi
- Features BLUETOOTH® wireless technology for pairing with optional remote on/off button (sold separately)
- Use with the KOHLER Konnect® app to unlock additional Anthem system features, Kohler-developed experiences, and system updates
- Provides connection to the KOHLER® Cloud via Wi-Fi
- One jack for power cord connection
- Provides connections for all system components, including steam



Available Colors/Finishes

Color tiles intended for reference only.

^{NA} NA Not Applicable



Codes/Standards

CSA C22.2 No. 14
CSA C22.2 No. 68
cUL Listed

Technical Information

All product dimensions are nominal.

Lighting Included: Yes

Material

- Reinforced engineering-grade thermoplastic casing
-

Connectivity



The BLUETOOTH® word mark and logos are registered trademarks owned by Bluetooth SIG, Inc. and any use of such marks by Kohler Co. is under license.


Warranty

See website for detailed warranty information.

KOHLER® Electronic Faucets, Valves, and Controls Five-Year Limited Warranty



1-800-4KOHLER (1-800-456-4537)
Kohler Co. reserves the right to make revisions without notice to product specifications.
For the most current specification sheet, go to www.kohler.com USA or www.kohler.ca Canada.
4-15-2026 6:36 - US-CA

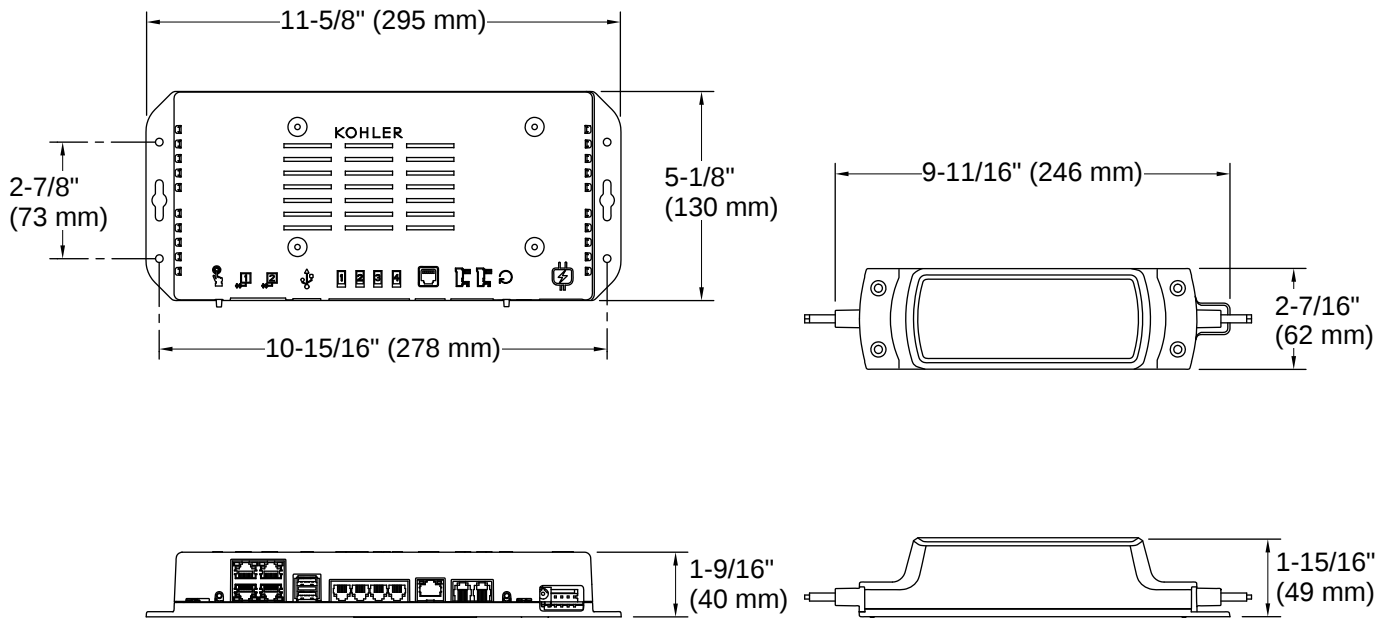

Installation

- Equipped with mounting wings for wall mounting (fittings included)
- Requires Anthem+ digital control and Anthem digital thermostatic valves (each sold separately)

Installation Notes

Install this product according to the installation instructions.

