


PEDICURE SPA K-163

Features

- KOHLER cast iron footbath
- Footbath includes chrome jet trim and fill spout
- Footbath features 3 Flexjet™ whirlpool jets and a single speed pump with on/off air switch
- Includes teak client chaise lounge and technician chair with cushions
- Includes faucet, handshower, diverter, and drain components

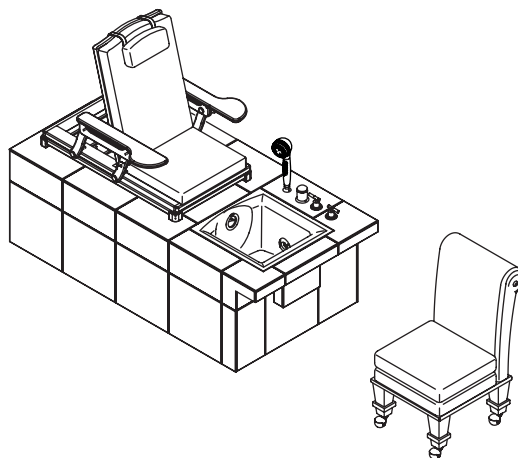

Codes/Standards Applicable

Specified model meets or exceeds the following:

- Underwriters Laboratories (UL)
- IAPMO/UPC
- ASME A112.19.1M
- ASME A112.19.7M

Colors/Finishes

- NA: None applicable
- 0: White

Specified Model

Model	Description	Colors/Finishes
K-163	Pedicure spa	<input type="checkbox"/> 0

Product Specification:

The pedicure spa footbath shall be 22" (55.9 cm) in length, 21" (53.3 cm) in width, and 15" (38.1 cm) in depth. The pedicure spa shall include a teak client chaise lounge and a technician chair with cushions. The teak client chaise lounge shall be 42-1/2" (107.9 cm) in length, 33-3/16" (84.3 cm) in width, and 34-3/8" (87.3 cm) in height. The technician chair shall be 19" (48.3 cm) in length, 17" (43.2 cm) in width, and 32-1/2" (82.6 cm) in height. The pedicure spa shall also include all faucet, handshower, diverter, and drain components. The footbath shall be made of cast iron and include chrome jet trim and fill spout. The footbath shall feature 3 Flexjet™ whirlpool jets and a single speed pump with on/off air switch. Product shall be Kohler Model K-163-0.

Technical Information

Fixture*:	basin area	top area	weight
Footbath	15-1/2" (39.4 cm) x 16" (40.6 cm)	21" (53.3 cm) x 22" (55.9 cm)	195 lbs (88.5 kg)
	water depth	capacity	
To overflow	10-13/16" (27.5 cm)	10 gal (37.9 L)	
	overall dimensions	weight	
Chaise lounge	42-1/2" (108 cm) x 33 3/16" (84.3 cm) x 34-1/8" (86.7 cm)	107 lbs (48.5 kg)	
Technician chair	22-1/4" (56.5) x 17-1/2" (44.5 cm) x 32-1/2" (82.6)	30 lbs (13.6 kg)	

* Approximate measurements for comparison only.

Pump:	Hp	V	Hz	A
1-speed	1/2	120	60	4


Included components:	
Cast iron footbath	NA
Client chaise lounge	NA
Technician chair	NA
Faucet valve	K-300-K
Taboret® faucet trim	K-T8232-4-CP
Handshower	K-8502-CP
Handshower kit	K-8548-CP
Deck-mount transfer valve	K-409-K
Transfer valve trim	K-T9540-7-CP
Drain	K-7213-CP

Required Electrical Service

Protect with Ground-Fault Circuit-Interrupter (GFCI)*:	
Pump/control:	120 V, 15 A, 50/60 Hz
* Locate the outlet within 24" (61 cm) of the pump.	

Installation Notes

Install this product according to the installation guide.

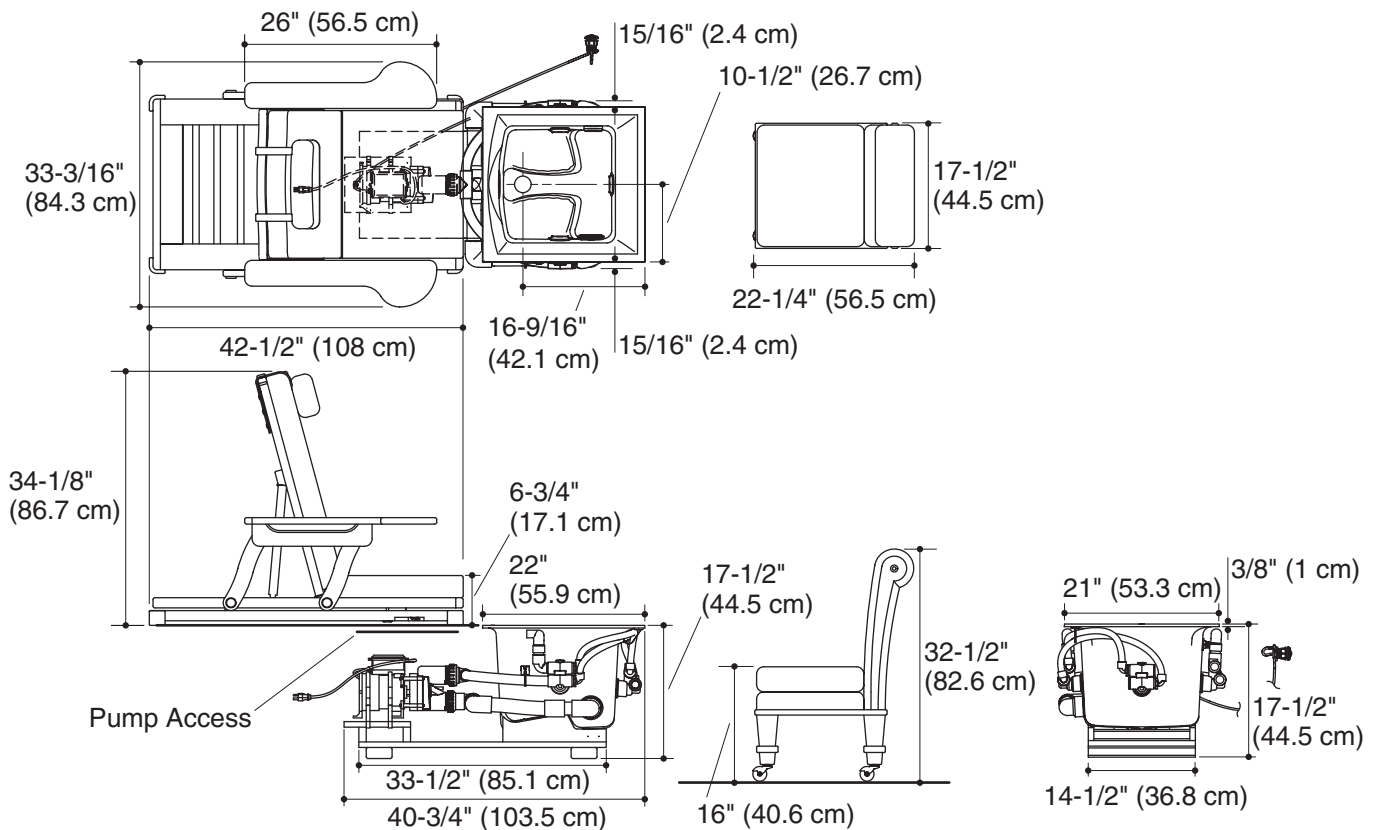

Product Diagram