

PROFLEX™ 6060

ACRYLIC BATH WHIRLPOOL

K-1144, K-1144-F


FEATURES

- 60" (152.4cm) x 60" (152.4cm) x 20-1/4" (51.4cm)
- Acrylic
- Drop-in rim style or tile flange, right-hand pump
- 6 individually adjustable multi-directional hydro-massage jets
- 1-1/4 HP pump with air switch and cord with plug
- Molded lumbar supports and armrests
- UL listed
- For corner installation
- Optional K-1491 removable pillow
- Optional K-1639 timer kit

CODES/STANDARDS APPLICABLE

Specified model meets or exceeds the following:

- ASME A112.19.7
- ANSI Z124.1
- IAPMO/UPC
- Underwriters Laboratories (UL)
- · State of Massachusetts

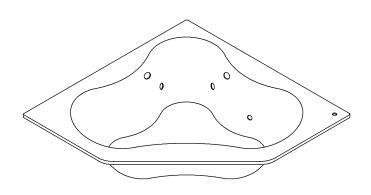

COLORS/FINISHES

- 0 White
- Other Refer to Fixtures Price Book for additional colors

Accessories:

- CP Polished Chrome
- PB Polished Brass
- Other Refer to Price Book for additional finishes
- NA None Applicable

SPECIFIED MODEL:

Model	Description	Colo	Colors/Finishes	
K-1144	Whirlpool, drop-in rim style, right-hand pump (shown)	□0 White	□Other	
K-1144-F	Whirlpool, tile flange, right-hand pump	□0 White	□Other	

Recommended Accessories			
K-11677	Drain	□CP	
Ontional Accessories			

Optional Accessories				
K-9696	Jet trim kit (metal finishes)	□СР	□РВ	□Other
K-1491	Pillow	□0 White		□Other
K-1639	Timer Kit			□NA

PRODUCT SPECIFICATION:

The bath whirlpool shall be 60" (152.4cm) in length, 60" (152.4cm) in width, and 20-1/4" (51.4cm) in height. Bath whirlpool shall be made of acrylic, drop-in rim style and tile flange, right-hand pump. Bath whirlpool shall have 6 individually adjustable multi-directional hydro-massage jets, 1-1/4 HP pump with air switch and cord with plug. Bath whirlpool shall have molded lumbar supports and armrests. Bath whirlpool shall be UL listed. Bath whirlpool shall be for corner installation. Bath whirlpool shall have optional K-1491 removable pillow. Bath whirlpool shall have optional K-1639 timer kit. Bath whirlpool shall be Kohler Model K-1144-_______.

PROFLEX™ 6060

PRODUCT INFORMATION

Fixture*:	basin area	top area	weight
Bathing well	49" (124.5cm) x 39" (99.1cm)	62" (157.5cm) x 47" (119.4cm)	89 lbs. (40.4 kg)
	water depth	capacity	
To overflow	15-1/2" (39.4cm)	96 gal. (363.4 L)	
* Approximate measurements for comparison only			

* Approximate measurements for comparison only.

Pump:	HP	٧	Hz	Α
1-speed	1-1/4	120	60	7.5
Minimum access panel pump/control:				
20" (50.8cm) W x 15" (38.1cm) H		requir	ed	

REQUIRED ELECTRICAL SERVICE


Dedicated circuit required, protected with Class A Ground-Fault Circuit-Interrupter (GFCI):		
Pump/control	120 V, 15 A, 60 Hz	
Locate the outlet behind the whirlpool and within 24" (61cm) of the pump.		

INSTALLATION NOTES

Install this product according to the installation guide.

No change in measurements if connected with drain illustrated. (K-11677 or K-11677M)

Floor support under whirlpool must provide for a minimum of 80 lbs./square foot (390 kg./square meter) loading.

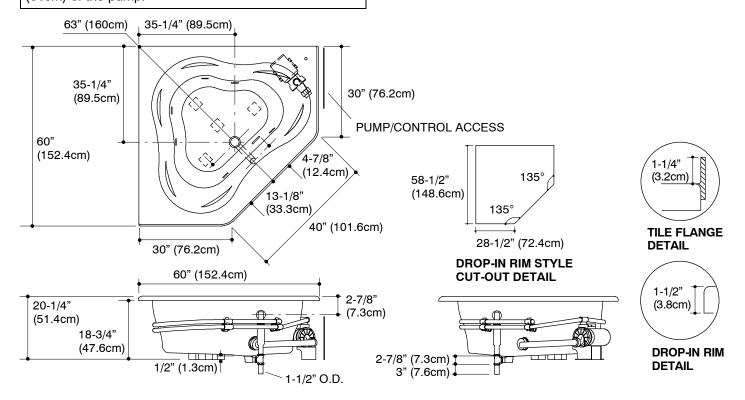

PRODUCT DIAGRAM

