

Features


- Brass construction
- Brass valve body
- Compression valves
- Integral diverter mechanism
- Adjustable escutcheons
- Available with metal or sculptured acrylic handles
- 4-7/8" (12.4 cm) non-diverter spout with NPT or slip-fit connection

Codes/Standards Applicable

Specified model meets or exceeds the following:

- ASME A112.18.1
- CSA B125
- IAPMO/UPC



BATH AND SHOWER FAUCET K-11618

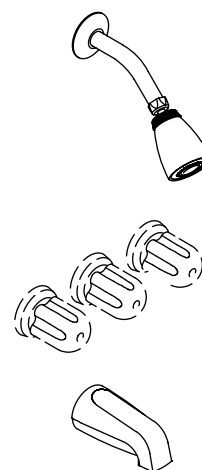

Colors/Finishes

- CP: Polished Chrome

Specified Model

Model	Description		
Trend® bath and shower faucet with metal handles:			
K-11618-U	NPT spout and NPT unions	<input type="checkbox"/> CP	
K-11618-UC	NPT spout and direct sweat unions	<input type="checkbox"/> CP	
K-11618-UD	Slip-fit spout and direct sweat inlets	<input type="checkbox"/> CP	
K-11618-UE	Slip-fit spout and direct sweat unions	<input type="checkbox"/> CP	
K-11618-US	Slip-fit spout and NPT unions	<input type="checkbox"/> CP	
Trend® bath and shower faucet with sculptured acrylic handles:			
K-11618-PC	NPT spout and direct sweat unions		<input type="checkbox"/> CP
K-11618-PD	Slip-fit spout and direct sweat inlets		<input type="checkbox"/> CP
K-11618-PS	Slip-fit spout and NPT unions		<input type="checkbox"/> CP

Product Specification


Three-handle bath and shower faucet shall be of brass construction. Faucet shall feature brass valve bodies and compression valves. Product shall include showerhead with arm and flange, 4-7/8" (12.4 cm) non-diverter spout with NPT or slip-fit connection, integral diverter mechanism, metal or sculptured acrylic handles, and adjustable escutcheons. Optional features shall be NPT or direct sweat unions. Faucet shall be Kohler Model K-11618-____-CP.

Technical Information

Applicable Trend® bath and shower faucet with metal handles:	
NPT spout and NPT unions	K-11618-U
NPT spout and direct sweat unions	K-11618-UC
Slip-fit spout and direct sweat inlets	K-11618-UD
Slip-fit spout and direct sweat unions	K-11618-UE
Slip-fit spout and NPT unions	K-11618-US
Applicable Trend® bath and shower faucet with sculptured acrylic handles:	
NPT spout and direct sweat unions	K-11618-PC
Slip-fit spout and direct sweat inlets	K-11618-PD
Slip-fit spout and NPT unions	K-11618-PS

Installation Notes

Install this product according to the installation guide.

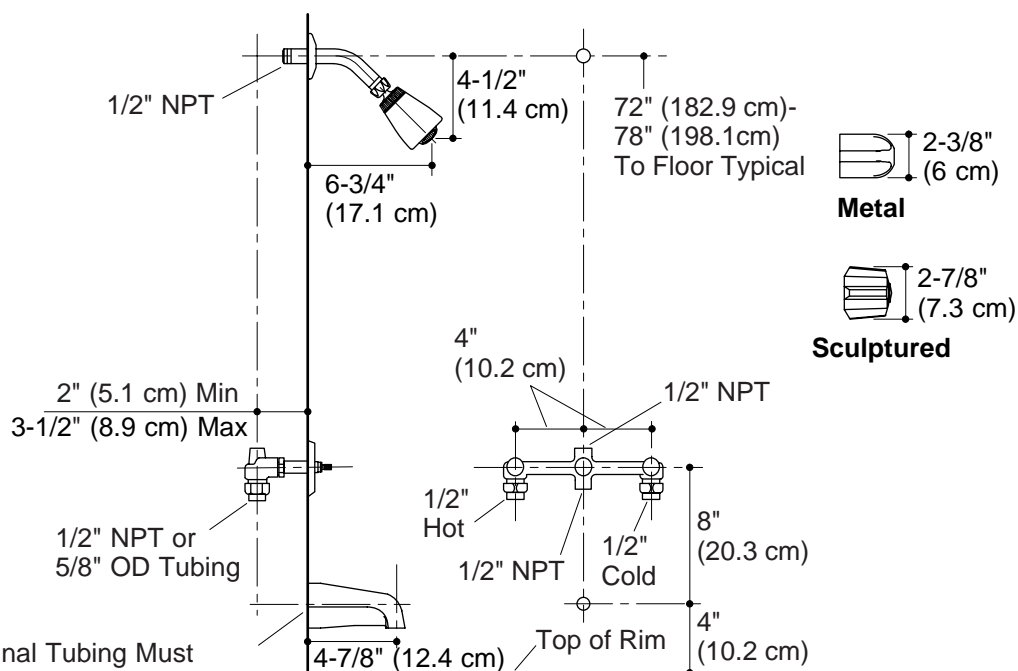

For Slip-Fit Spout, 1/2" Nominal Tubing Must Extend 1-1/2" (3.8 cm) Min; 2-7/8" (7.3 cm) Max Beyond Finished Wall.

For IPS Spout, Pipe Must Extend 3-7/8" (9.8 cm) Beyond Finished Wall.

Product Diagram