


Features

- Brass construction
- Fixture-mount design
- Intended for urinal installations with 3/4" spud coupling connection
- Non-hold open piston technology for accurate activation
- Retrofit models require a control stop and vacuum breaker
- 0.125 gpf (0.5 lpf) for low water consumption washout urinals (K-13520 and K-13520-RF)

EXPOSED FLUSH VALVE
K-13520
ALSO K-13520-RF

ADA

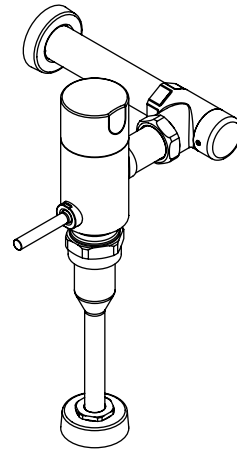

Codes/Standards Applicable

Specified model meets or exceeds the following:

- ADA
- ASSE 1037
- CSA B125.3
- ICC/ANSI A117.1
- CSA B64

Colors/Finishes

- CP: Polished Chrome

Specified Model


Model	Description	Colors/Finishes
K-13520	0.125 gpf (0.5 lpf) exposed flush valve	<input type="checkbox"/> CP
K-13520-RF	0.125 gpf (0.5 lpf) exposed flush valve retrofit	<input type="checkbox"/> CP

Product Specification

The manual flush valve shall be made of brass construction. Valve shall feature non-hold open piston technology for accurate activation. Valve shall have a fixture-mount design. Valve is intended for urinal installations with a 3/4" spud coupling connection and retrofit models require a control stop and vacuum breaker. Valve shall have a 0.125 gpf (0.5 lpf) for low water consumption washout urinals (K-13520 and K-13520-RF). Exposed flush valve shall be Kohler Model K-____-CP.

Installation Notes

Install this product according to the installation guide.

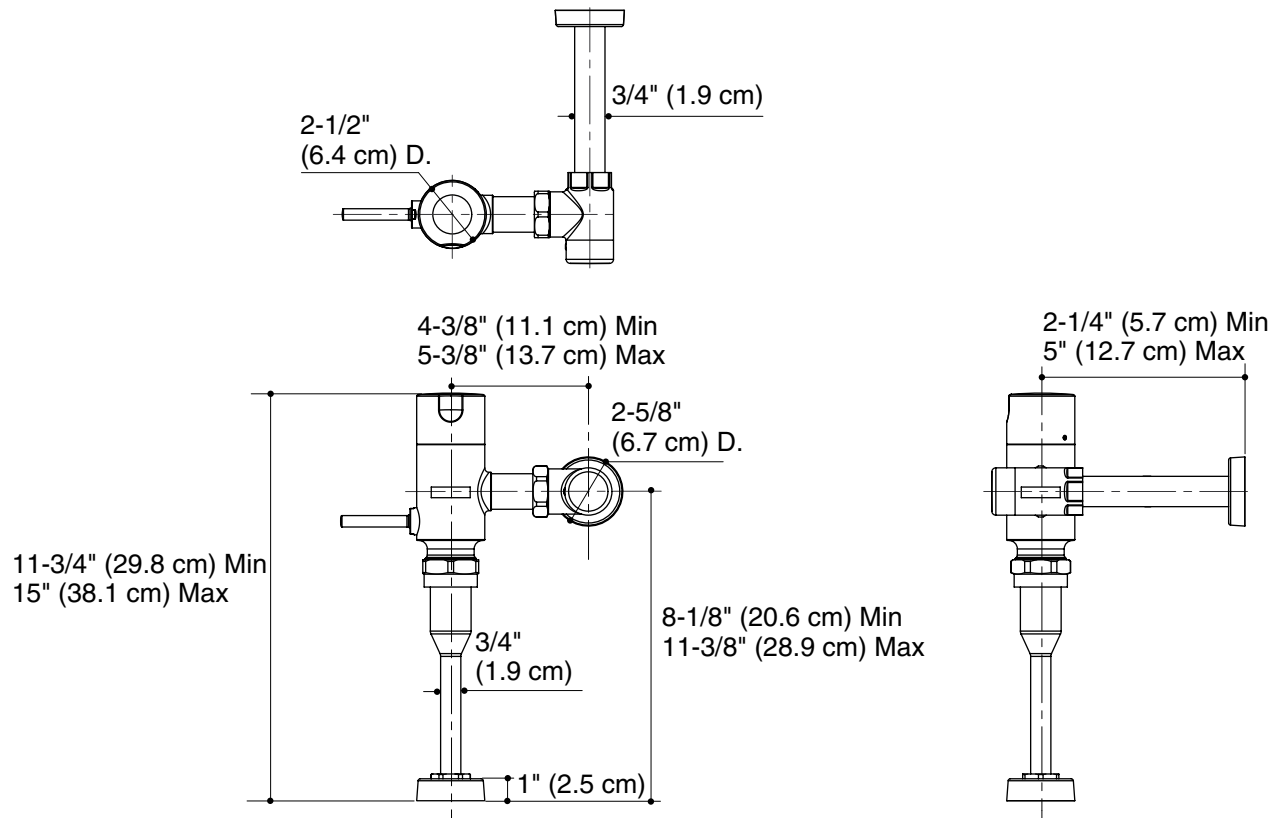

Product Diagram