

Product Information

Applicable products:				
Steam generator		K-1652		
Water and drain requirements:				
Water supply	3/8" line, 3/8" NPT female thread			
Steam line	1/2" copper line, 1/2" NPT female thread			
Pressure relief valve	3/4" NPT male thread, valve supplied			
Drain line	3/8" line, 3/8" NPT male thread, ball valve supplied			
Generator:				
Weight	19-1/2 lbs (8.8 kg)			
Electrical rating	240 V, 27 A, 50/60 Hz			

Required Electrical Service

Dedicated circuit required:		
Generator	240 V, 40 A, 50/60 Hz	

Installation Notes


Install this product according to the installation guide.

Fixture dimensions are nominal.

Factory sized: L x H x W = cubic feet. Choose the appropriate model. For every foot of ceiling height over 8 ft (2.4 cm), use the next larger steam unit. Always round your measurements up. Wall material is irrelevant for sizing.

For this steam generator, enclosure shall not exceed the maximum volume rating:

Steam generator model	Power rating	Maximum volume rating
K-1652	5 kW	56 cu ft (1.6 cu m)

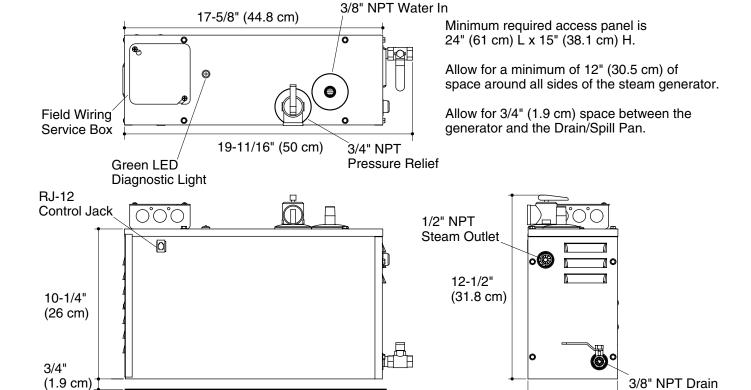

Inside surface of Drain/Spill Pan.

6-1/8" (15.6 cm)