

# **GABRIELLE**<sub>TM</sub>

#### **Features**

- Vitreous china
- 12" (30.5 cm) rough-in
- Class Five™ flushing system
- 2-1/8" (5.4 cm) glazed trapway
- 1.6 gpf (6 lpf) or 1.4 gpf (5.3 lpf)
- One-piece
- Includes seat and cover
- Less supply
- Elongated bowl
- ADA compliant when an open-front seat is installed
- 11" (27.9 cm) x 8-1/2" (21.6 cm) water area
- 28-1/4" (71.8 cm) x 18-1/2" (47 cm) x 28" (71.1 cm)

### Codes/Standards Applicable

Specified model meets or exceeds the following:

- ASME A112.19.2
- Energy Policy Act of 1992
- IAPMO/UPC
- ADA

### COMFORT HEIGHT™ COMPACT TOILET K-3513 ALSO K-3513-RA

**ADA** 



#### Colors/Finishes

- 0: White
- Other: Refer to Price Book for additional colors/finishes

#### **Accessories:**

- · CP: Polished Chrome
- PB: Vibrant® Polished Brass
- Other: Refer to Price Book for additional colors/finishes

### **Specified Model**

Model	Description	Trip Lever	Colors/Fin	ishes
K-3513	Compact one-piece elongated bowl toilet	left-hand	<b>0</b>	☐ Other
K-3513-RA	Compact one-piece elongated bowl toilet	right-hand	0	☐ Other

Recommended Accessories					
K-7637	Angle supply with stop		□ CP	□ PB	☐ Other
K-4650	Lustra™ open front toilet seat – for ADA compliant installation	<b>0</b>			□ Other

# **Product Specification**

The compact one-piece elongated bowl toilet shall be made of vitreous china. Toilet shall be 28-1/4'' (71.8 cm) in length, 18-1/2'' (47 cm) in width, and 28'' (71.1 cm) in height. Toilet shall have an 11'' (27.9 cm) x 8-1/2'' (21.6 cm) water area. Toilet shall be 12'' (30.5 cm) rough-in with a 2-1/8'' (5.4 cm) glazed trapway. Toilet shall have a Class Five flushing system with a flush rate of 1.6 gpf (6 lpf) or 1.4 gpf (5.31 lpf). Toilet shall be ADA compliant when an open-front seat is installed. Toilet shall include seat and cover. Toilet shall be less supply. Toilet shall be Kohler Model K-3513-

kohler.com

# **GABRIELLE**<sub>TM</sub>

Optional Accessories				
K-9483-L	Left-hand trip lever – non-CP	□ PB	☐ Other	
K-9483-R	Right-hand trip lever – non-CP	□ PB	☐ Other	

#### **Technical Information**


Fixture:	
Configuration	one-piece, elongated
Water per flush	1.6 gal (6 L) or 1.4 gal (5.3 L)
Passageway	2-1/8" (5.4 cm)
Water area	11" (27.9 cm) x 8-1/2" (21.6 cm)
Water depth from rim	6" (15.2 cm)
Seat post hole centers	5-1/2" (14 cm)

Included components:	
Seat	K-4713
Tank cover	85407
Left-hand trip lever	1068627
Right-hand trip lever	1080378
Bolt cap accessory pack	52048
Tank accessory pack	52265

#### **Installation Notes**

Install this product according to the installation guide.

This toilet is ADA compliant when an open front seat is installed.

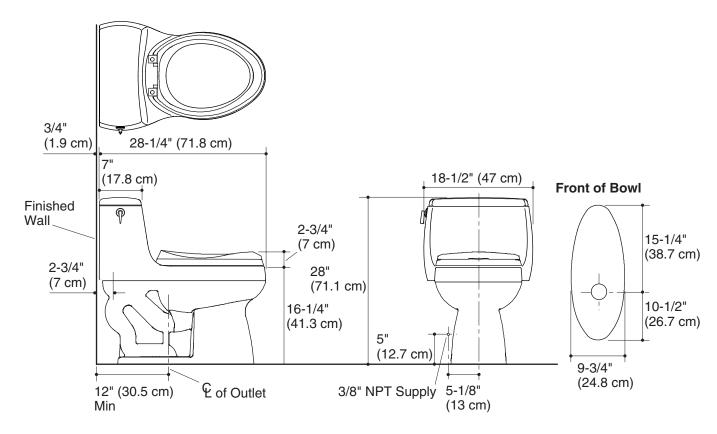

# **Product Diagram**

