# KOHLER® FAUCETS

CORALAIS®

LAVATORY FAUCET
K-15583

ADA

Features
- *Metal construction*
- *One-piece, self-contained ceramic disc valve allows both volume and temperature control*
- *Temperature memory allows faucet to be turned on and off at any temperature setting*
- *High-temperature limit setting for added safety*
- *2.0 gallons (7.6 L) per minute flow rate [max at 60 psi (4.14 bar)]*
- *Metal throatplate*
- *Available with flexible connections or ground joints*
- *For 4″ (10.2 cm) centers*
- *4-1/4″ (10.8 cm) spout reach*
- *Available with 4-1/2″ (11.4 cm) or 5-3/4″ (14.6 cm) vandal-resistant lever handle*
- *Vandal-resistant aerator and pop-up drain with lift rod and tailpiece*

Codes/Standards Applicable
Specified model meets or exceeds the following:
- *ASME A112.18.1*
- *IAPMO/UPC*
- *NSF 61*
- *Energy Policy Act of 1992*
- *ADA*

K-15583-F
K-15583-P

K-15583-F5
K-15583-5P

Colors/Finishes
- CP: Polished Chrome

Specified Model

Model	Description	Colors/Finishes
K-15583-F	Coralais® lavatory faucet with 4-1/2″ (11.4 cm) lever handle and flexible connections	❏ CP
K-15583-P	Coralais® lavatory faucet with 4-1/2″ (11.4 cm) lever handle and ground joint connections	❏ CP
K-15583-F5	Coralais® lavatory faucet with 5-3/4″ (14.6 cm) lever handle and flexible connections	❏ CP
K-15583-5P	Coralais® lavatory faucet with 5-3/4″ (14.6 cm) lever handle and ground joint connections	❏ CP

Product Specification

Single-control centerset lavatory faucet shall be of metal construction. The valve shall be a one-piece, self-contained ceramic disc valve, and allows both volume and temperature control. The valve shall feature temperature memory, allowing the faucet to be turned on and off at any temperature setting, and includes a high-temperature limit stop. Product shall include 4″ (10.2 cm) centers, 4-1/4″ (10.8 cm) spout, vandal-resistant (VR) pop-up drain with lift rod and tailpiece, VR aerator, and VR 4-1/2″ (11.4 cm) or 5-3/4″ (14.6 cm) lever handle. Product shall be available with either flexible or ground joint connections. Faucet shall be Kohler Model K-15583-_____-CP.
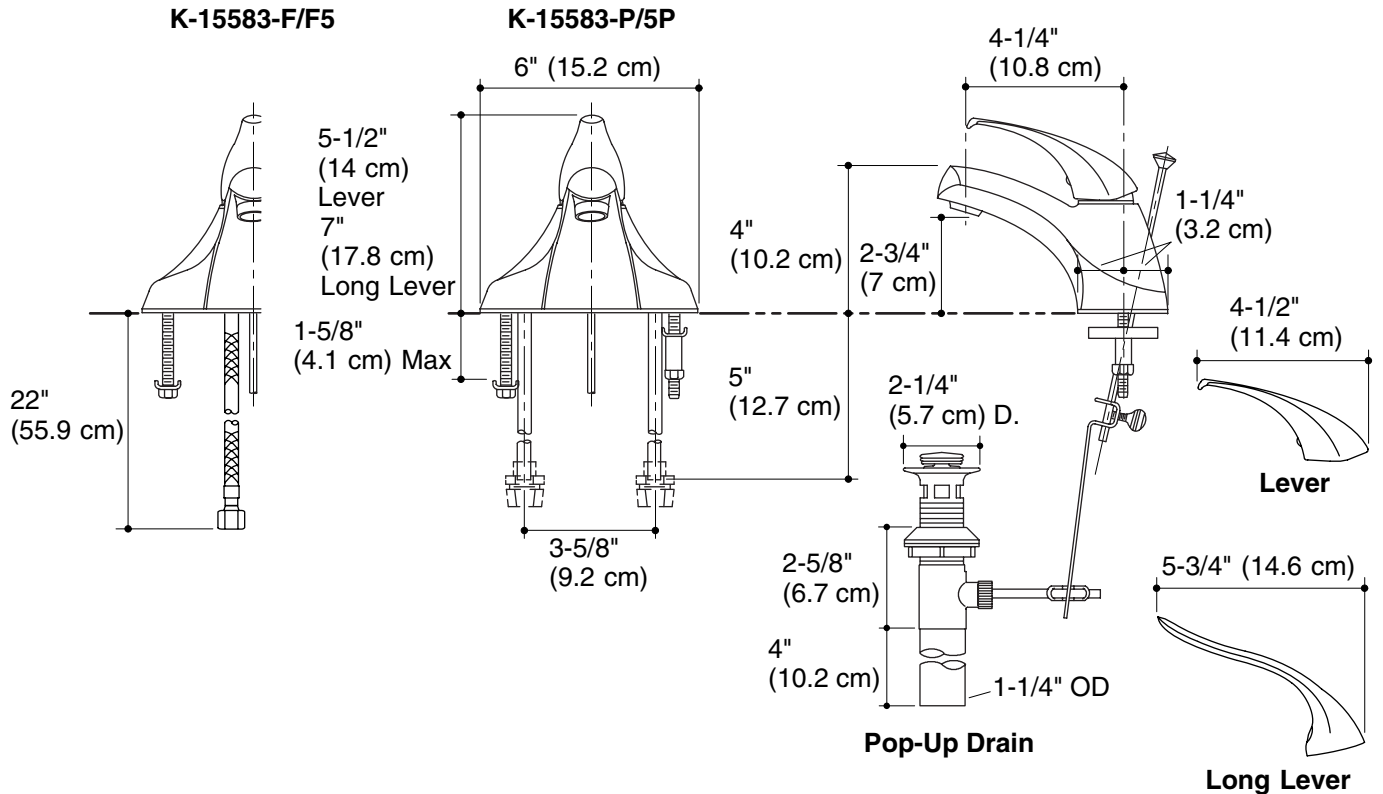
CORALAIS®

Technical Information

Applicable lavatory faucet with 4-1/2″ (11.4 cm) lever handle:	
With flexible connections	K-15583-F
With ground joint connections	K-15583-P
Applicable lavatory faucet with 5-3/4″ (14.6 cm) lever handle:	
With flexible connections	K-15583-F5
With ground joint connections	K-15583-5P
Lever handles are ADA compliant.	**ADA**

Installation Notes

Install this product according to the installation guide.

K-15583-F/F5   **K-15583-P/5P**

6" (15.2 cm)

5-1/2" (14 cm) Lever
7" (17.8 cm) Long Lever

1-5/8" (4.1 cm) Max

22" (55.9 cm)

3-5/8" (9.2 cm)

4" (10.2 cm)

5" (12.7 cm)

4-1/4" (10.8 cm)

2-3/4" (7 cm)

1-1/4" (3.2 cm)

2-1/4" (5.7 cm) D.

2-5/8" (6.7 cm)

4" (10.2 cm)

1-1/4" OD

Pop-Up Drain

4-1/2" (11.4 cm)

Lever

5-3/4" (14.6 cm)

Long Lever

Product Diagram

THE BOLD LOOK OF **KOHLER**®