



Underscore® 5' Cube Whirlpool Bath K-1969-H2



Features

- Two raised corner seats, at 6-3/4" (171 mm) and 11-7/8" (302 mm) from bath floor.
- 27-1/2" (699 mm) soaking depth at seat areas.
- Integral lumbar support.
- Built-in 1500 W heater.
- 48" (1219 mm) x 48" (1219 mm) x 34" (864 mm)

Material

- Acrylic

Hydrotherapy

- Eight fully adjustable Flexjet™ hydrotherapy jets for water flow and direction.
- Variable-speed pump for adjusting hydromassage intensity.
- Lighted keypad control.
- Remote control.

Installation

- Drop-in or under-mount

Required Accessories

K-9698 Flexjet® Whirlpool Trim Kit

Recommended Accessories

K-8134 Bath cable drain trim
K-8150 Cube Cable Drain
K-578 Cube Undermount Installation Kit
K-1491 Bath/Whirlpool Pillow
K-1601 Bath/Whirlpool Footstop



Codes/Standards



ASME A112.19.7/CSA B45.10
CSA B45.5/IAPMO Z124
ASTM E162
ASTM E662
UL 1795
CSA C22.2 No. 218.2
Greenguard UL 2818 - Gold
CARB P2

KOHLER® One-Year Limited Warranty


See website for detailed warranty information.

Available Color/Finishes

Color tiles intended for reference only.

Color	Code	Description
	0	White
	96	Biscuit

No change in measurements if connected with drain illustrated. (K-8150)

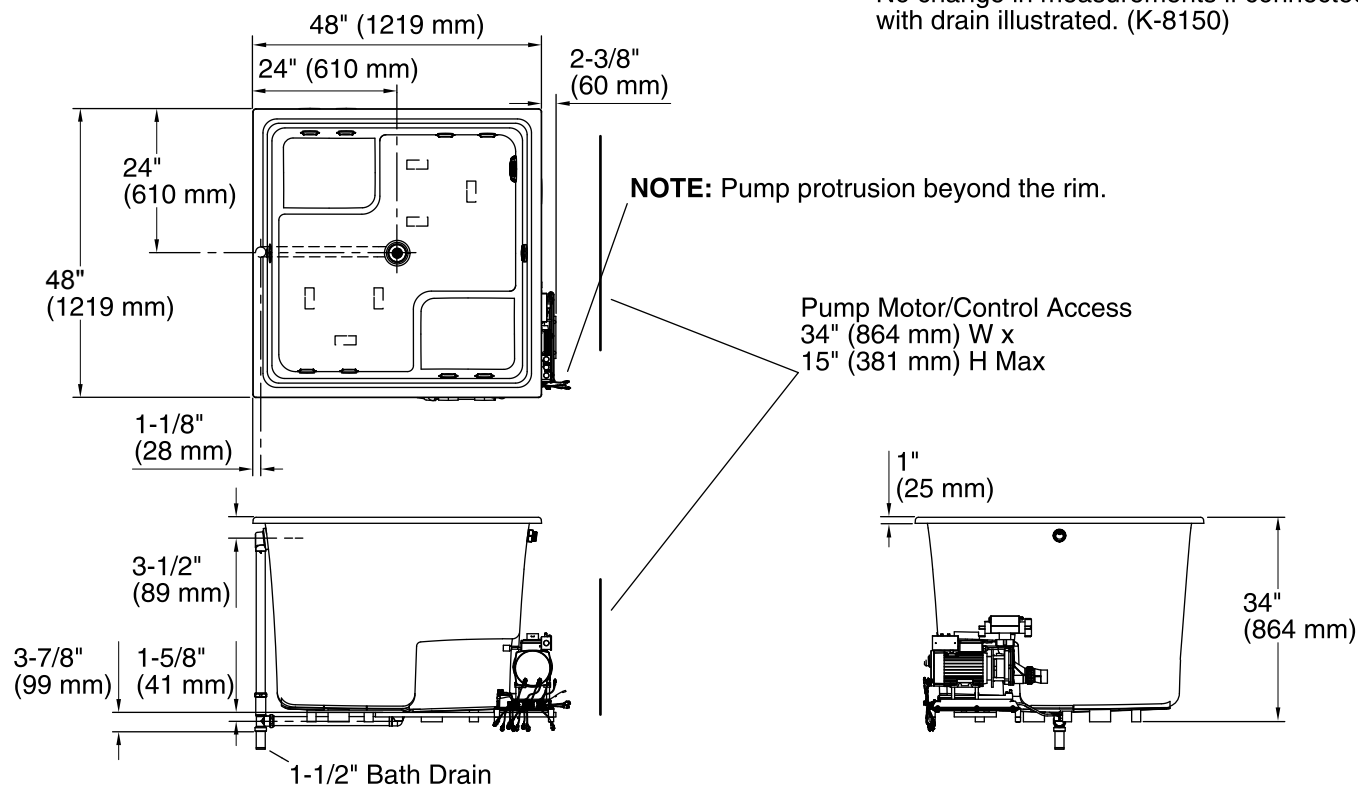

Required Electrical Service

One dedicated circuit required, protected with Class A Ground-Fault Circuit-Interrupter (GFCI) or Residual Current Device (RCD).

Heater, Pump: 240 V, 20 A, 50/60 Hz

Technical Information

All product dimensions are nominal.

Installation:	Drop-in
Drain location:	Center
Basin area, bottom:	39-3/8" x 39-3/8" (1000 mm x 1000 mm)
Basin area, top:	44-5/8" x 44-5/8" (1134 mm x 1134 mm)
Weight:	150 lbs (68 kg)
Minimum floor load:	100 lbs/ft² (488.2 kg/m²)
Water depth:	27-1/2" (699 mm)
Water capacity:	171 gal (647.3 L)
Electrical component rating:	Heater: 240 V, 50/60 Hz, 1500 W Pump: 240 V, 15 A, 50/60 Hz, 1500 W

Notes

Measure your actual product for rough-in details.

Install this product according to the installation instructions.

The hot water supply should be 70% of the capacity of the bath or greater. Installations will vary.