

Features

- Vitreous china.
- Elongated bowl.
- ADA compliant when installed at required height of 17" (432 mm) - 19" (483 mm) from floor to top of seat.
- Blow-out.
- Wall-mount.
- 1-1/2" top spud.
- 3.5 gpf (13.2 lpf).
- 14-1/2" (368 mm) x 11-3/8" (289 mm) water area.
- 26" (660 mm) x 14" (356 mm) x 11-3/4" (298 mm).

Recommended Accessories

- K-4670-C Commercial Toilet Seat
- K-4670-CA Commercial Toilet Seat

Components

Additional included component/s: Spud.



ADA CSA B651 OBC

Codes/Standards





ASME A112.19.2/CSA B45.1
DOE - Energy Policy Act 1992
ADA
ICC/ANSI A117.1
CSA B651
OBC


KOHLER® One-Year Limited Warranty

See website for detailed warranty information.

Available Color/Finishes

Color tiles intended for reference only.

Color	Code	Description
	0	White
	96	Biscuit
	47	Almond
	7	Black Black™

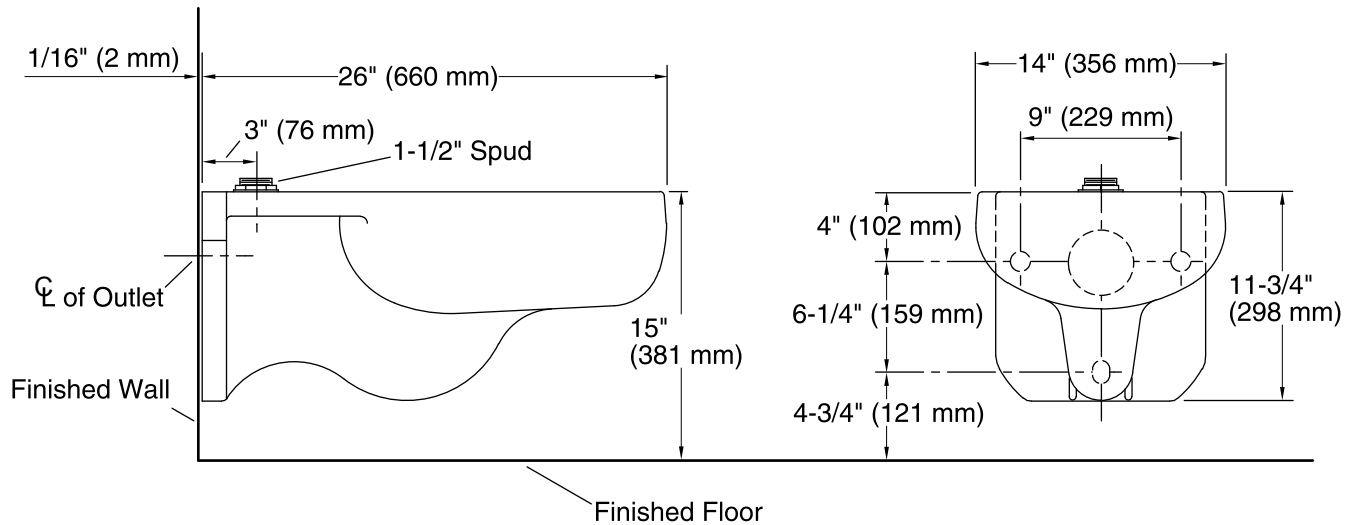

Technical Information

All product dimensions are nominal.

Toilet type:	One-piece, Wall-mount
Waste Outlet:	Wall
Bowl shape:	Elongated front
Spud size:	1-1/2", Inlet, Top
Trap passageway:	2-3/4" (70 mm)
Water surface size:	14-1/2" x 11-3/8" (368 mm x 289 mm)
Rim to water surface:	5-3/8" (137 mm)
Seat-mounting holes:	5-1/2" (140 mm)

Fixture Supply Requirements

Min static pressure:	45 psi (310.3 kPa)
Max static pressure:	80 psi (551.6 kPa)
Min flowing pressure:	35 psi (241.3 kPa)
Min flow rate:	35 gpm (132.5 lpm)

Notes

Install this product according to the installation instructions.

Refer to manufacturer and local codes for flush valve requirements.

ADA, OBC, CSA B651 compliant when installed to the specific requirements of these regulations.

Plumbing Codes require elongated toilets and elongated, open-front toilet seats in public bathrooms.

Accessibility standards require controls to be located on the open side of the toilet.