


THERMOSTATIC MIXER

K-669-KS

ALSO K-679-KS

Features

- Brass construction
- Wall-mount
- Brass valve body
- Single-handle control
- High-flow valving
- High-temperature limit stop for added safety
- Temperature-balancing mechanism
- Scald hazard prevention
- Integral stops
- Crossflow prevention
- 1/2" or 3/4" NPT connections
- Filter screens
- Less volume control

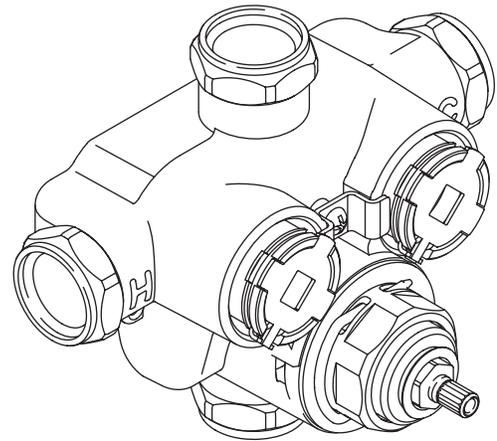

Codes/Standards Applicable

Specified model meets or exceeds the following:

- ASME A112.18.1
- ASSE 1016
- CSA B125
- IAPMO/UPC

Colors/Finishes

- NA: None applicable

Specified Model

Model	Description	Colors/Finishes
K-669-KS	3/4" thermostatic mixer - less volume control	<input type="checkbox"/> NA
K-679-KS	1/2" thermostatic mixer - less volume control	<input type="checkbox"/> NA
Required Accessory:		
K-671-K	3/4" volume control valve - for use on bath and shower outlets	<input type="checkbox"/> NA
K-681-K	1/2" volume control valve - for use on bath and shower outlets	<input type="checkbox"/> NA
Optional Accessory:		
K-9663	Twin ell - for use with diverter bath spouts only	<input type="checkbox"/> NA

Product Specification

Single-handle wall-mount thermostatic mixer less volume control shall be of brass construction. Product shall feature a brass valve body, high-flow valving, high-temperature limit stop for added safety, and temperature-balancing mechanism. Product shall feature integral stops, crossflow prevention, filter screens, and scald hazard prevention. Product shall be available with 1/2" or 3/4" NPT connections. The thermostatic mixer shall be Kohler Model K-____-KS-NA and the required volume control valve shall be K-____-K-NA.

MASTERSHOWER™

Installation Notes


Install this product according to the installation guide.

The K-669-KS and K-679-KS thermostatic mixer valves require a separate volume control valve, K-671-K or K-681-K, for each bath and/or shower outlet.

For bath-only or shower-only installations, an NPT plug must be installed in any unused outlet.

The lower port of the thermostatic mixer is intended for use with a bath spout only. If a bath spout is not used with this product, the lower port must be plugged.

For installations with a diverter spout, a twin ell, K-9663, is required between the valve and the spout. It is acceptable for the supply to the K-9663 twin ell to run from the top or bottom port through the volume control valve if the remaining unused port is plugged.

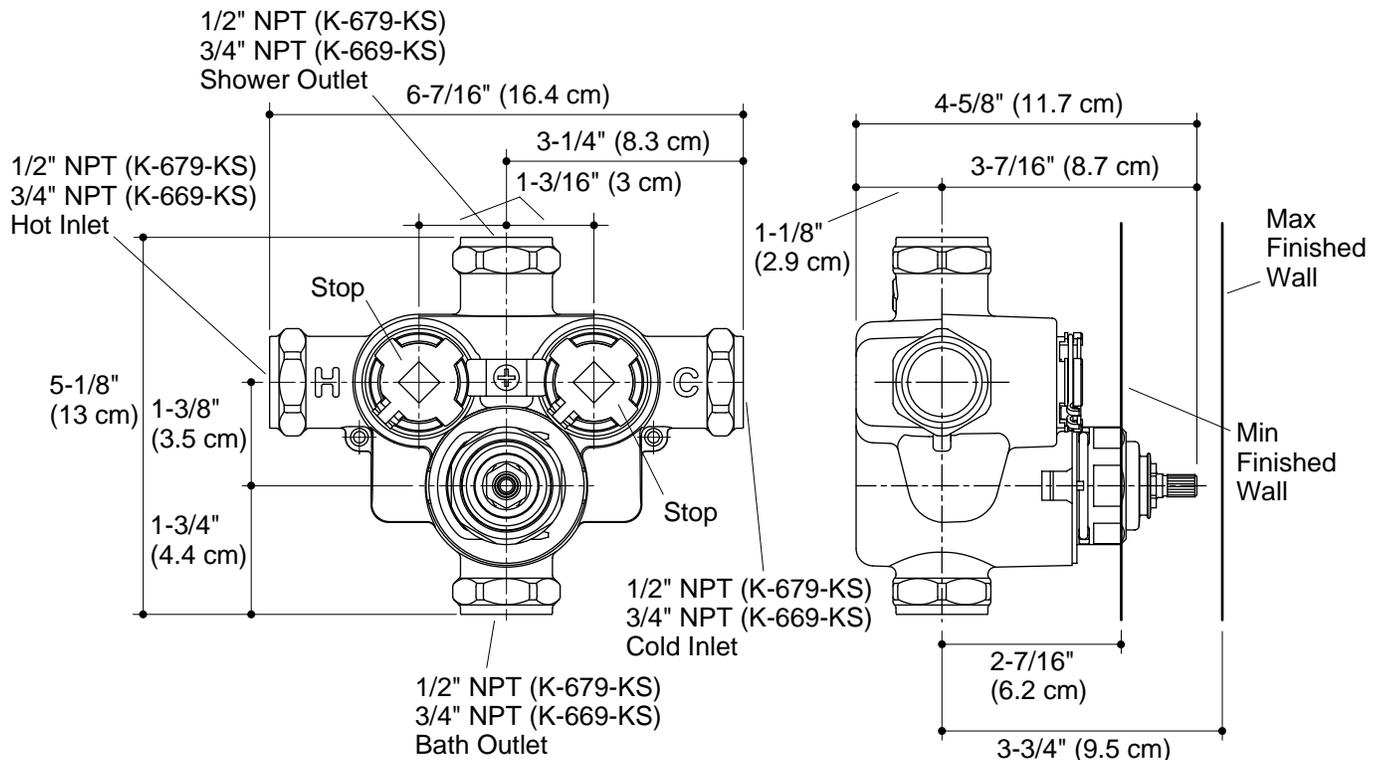

Product Diagram