

### Features

- Safeguard® slip-resistant surface provides excellent traction underfoot
- 60"L x 30-1/4"W x 14"H
- Integral apron for quick installation
- Integral lumbar support
- Integral apron

### Material

- KOHLER® enameled cast iron

### Installation

- Alcove
- Left drain
- Integral flange

### Required Products/Accessories

K-T37391 Rotary-turn bath drain trim  
K-T37392 Rotary-turn bath drain trim

or

K-37383 Rough-in cable bath drain, PVC, 30" cable with tubing  
K-78438 30" cable bath drain

### Recommended Products/Accessories

K-1491 Bath/Whirlpool Pillow  
K-1601 Bath/whirlpool footstop, removable  
K-7213 27" Cable Bath Drain  
K-7214 27" Cable Bath Drain  
K-23726 Drain treatment  
K-23725 Cast iron cleaner



ADA

### Codes/Standards

ASME A112.19.1/CSA B45.2  
ASTM F462  
ADA  
ICC/ANSI A117.1

### KOHLER® Enameled Cast Iron Bath and Shower Base Lifetime Limited Warranty


See website for detailed warranty information.

### Available Colors/Finishes

*Color tiles intended for reference only.*

| Color | Code | Description |
|-------|------|-------------|
|-------|------|-------------|

|   |    |         |
|---|----|---------|
|  | 0  | White   |
|  | 96 | Biscuit |

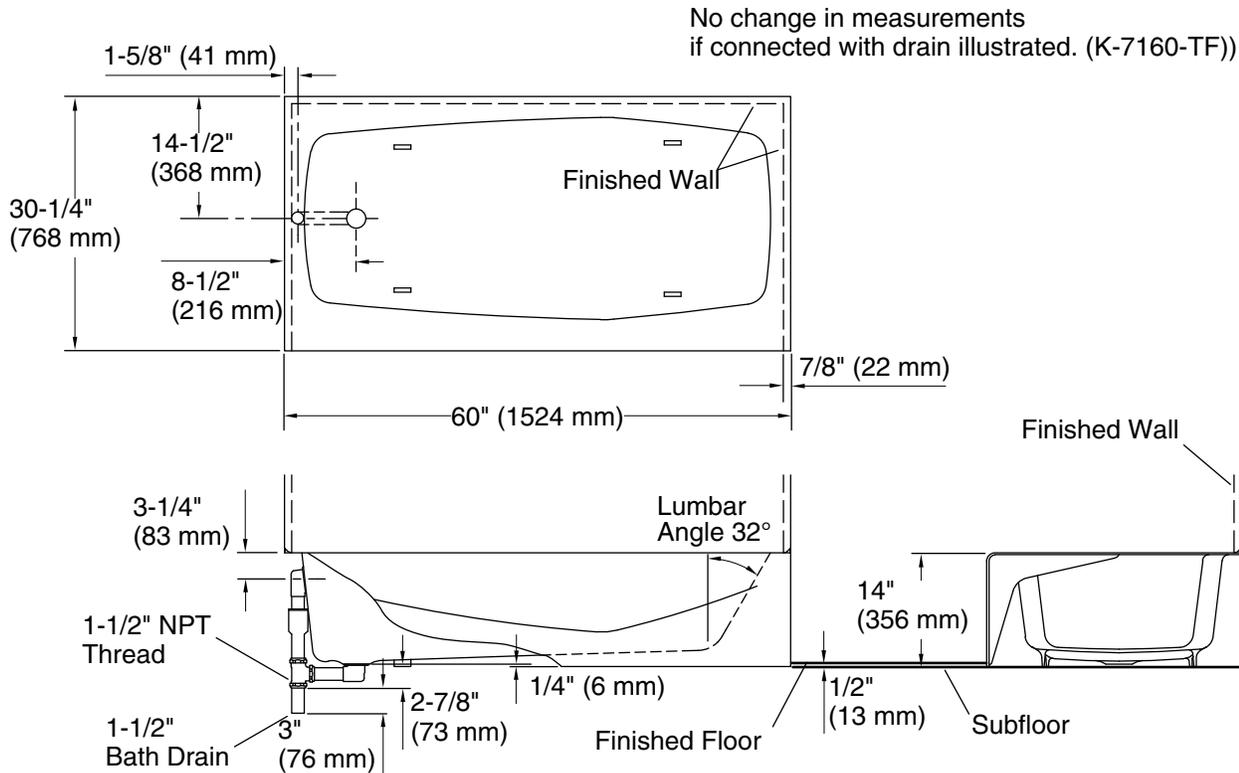

## Technical Information

All product dimensions are nominal.

|                        |   |
|------------------------|---|
| Drain location:        | Left  |
| Basin area, bottom:    | 45" x 22" (1143 mm x 559 mm)                      |
| Basin area, top:       | 55" x 24" (1397 mm x 610 mm)                      |
| Weight:                | 316 lbs (143.3 kg)                                |
| Minimum floor load:    | 49 lbs/ft <sup>2</sup> (239.2 kg/m <sup>2</sup> ) |
| Water depth:           | 8-5/8" (219 mm)                                   |
| Water capacity:        | 33 gal (124.9 L)                                  |
| Minimum flat for door: | 1-7/8" (48 mm)                                    |

## Notes

Measure your actual product for rough-in details.

Install this product according to the installation instructions.

The hot water supply should be 70% of the capacity of the bath or greater. Installations will vary.

ADA compliant when installed to the specific requirements of these regulations.