

UNDERCOUNTER KITCHEN SINK K-3899


Features

- 18-gauge stainless steel
- Undercounter
- Double (equal) compartment
- Includes SilentShield® sound-absorption technology
- Includes installation hardware
- 8" (20.3 cm) deep basins
- 31-5/8" (80.3 cm) x 19-9/16" (49.7 cm)

Codes/Standards Applicable

Specified model meets or exceeds the following:

- ASME A112.19.3/CSA B45.4

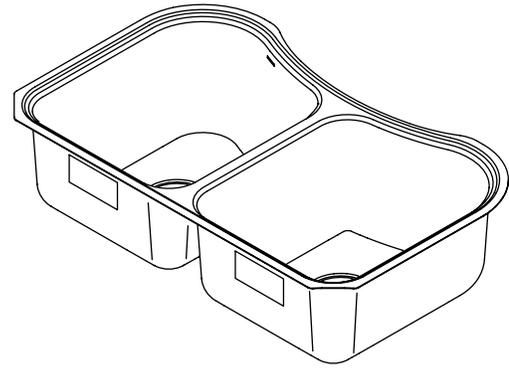

Colors/Finishes

- NA: None applicable

Accessories

- CP: Polished Chrome
- ST: Stainless Steel
- NA: None applicable

Specified Model

Model	Description	Colors/Finishes
K-3899	Undercounter kitchen sink	<input type="checkbox"/> NA

Optional Accessories				
K-3194	Stainless steel bottom basin rack (for left basin only)			<input type="checkbox"/> ST
K-3196	Stainless steel bottom basin rack (for right basin only)			<input type="checkbox"/> ST
K-3370	Staccato hardwood cutting board		<input type="checkbox"/> NA	
K-8813	Stainless steel sink strainer with tailpiece	<input type="checkbox"/> CP		

Product Specification

The undercounter kitchen sink shall be made of 18-gauge stainless steel. Sink shall be 31-5/8" (80.3 cm) in length and 19-9/16" (49.7 cm) in width, and 8" (20.3 cm) in depth. Sink shall be double (equal) compartment. Sink shall feature SilentShield® sound-absorption technology. Sink shall include installation hardware. Sink shall be Kohler Model K-3899-NA.

STACCATO™

Technical Information


Fixture*:	
Left and right compartments	
Basin areas	13-15/16" (35.4 cm) x 17-1/16" (43.3 cm)
Water depth	8" (20.3 cm)
Drain opening	3-5/8" (9.2 cm) D.
* Approximate measurements for comparison only.	

Included components:	
Hardware kit	91915
Cut-out template	1100423-7

Installation Notes

Install this product according to the installation guide.

Allow a minimum of 2" (5.1 cm) clearance around the sink rim for clip attachment.

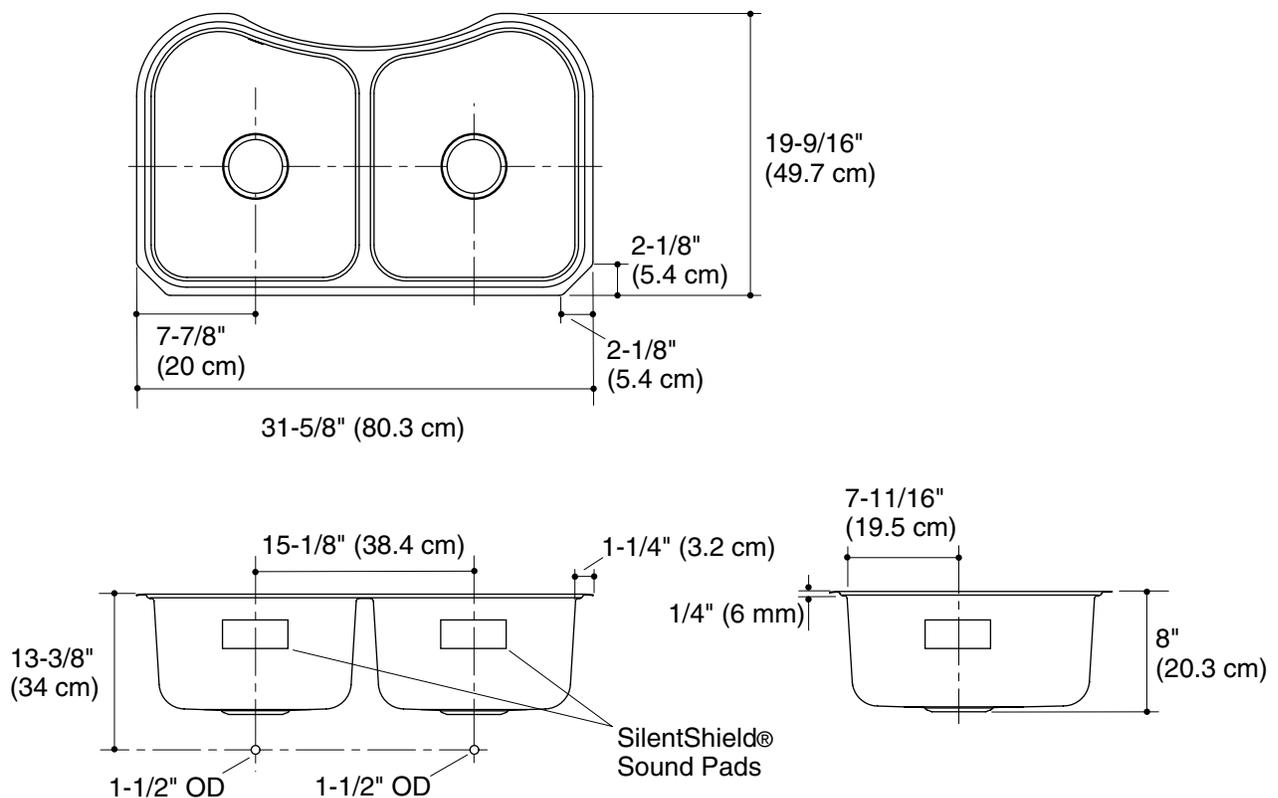

Product Diagram

STACCATO™ UNDERCOUNTER KITCHEN SINK

Page 2 of 2
1128044-4-A


THE BOLD LOOK
OF **KOHLER**®

DUOSTRAINER®

Features

- Brass construction
- For sink installations with 3-1/2" (8.9 cm) or 4" (10.2 cm) outlet
- Removable basket strainer with open/close stopper
- 1-1/2" connection

SINK STRAINER
K-8801
ALSO K-8799

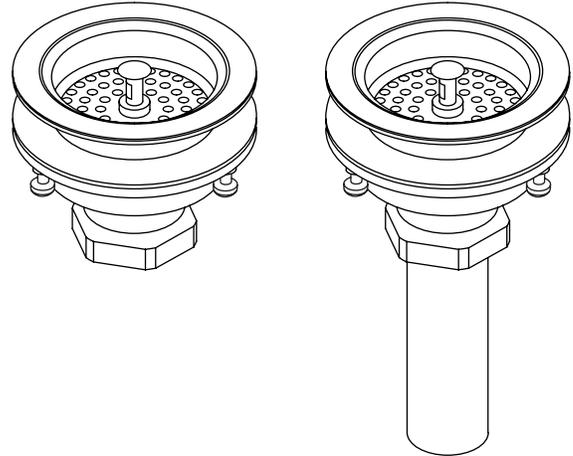

Codes/Standards Applicable

Specified model meets or exceeds the following:

- ASME A112.18.1
- CSA B125
- IAPMO/UPC

Colors/Finishes

- CP: Polished Chrome
- PB: Polished Brass
- Other: Refer to Price Book for additional colors/finishes

Specified Model:

Model	Description	Colors/Finishes		
		<input type="checkbox"/> CP	<input type="checkbox"/> PB	<input type="checkbox"/> Other _____
K-8799	Sink strainer less tailpiece	<input type="checkbox"/> CP	<input type="checkbox"/> PB	
K-8801	Sink strainer with tailpiece	<input type="checkbox"/> CP	<input type="checkbox"/> PB	<input type="checkbox"/> Other _____


PRODUCT SPECIFICATION

Duostrainer sink strainer shall be of brass construction. Product shall feature removable basket strainer with an open/close stopper, and 1-1/2" connection. Product is intended for sink installations with 3-1/2" (8.9 cm) or 4" (10.2 cm) outlet. Optional feature shall be a brass tailpiece. Strainer shall be Kohler Model K-_____-_____.

DUOSTRAINER®

Installation Notes

Install this product in accordance with the installation instructions.

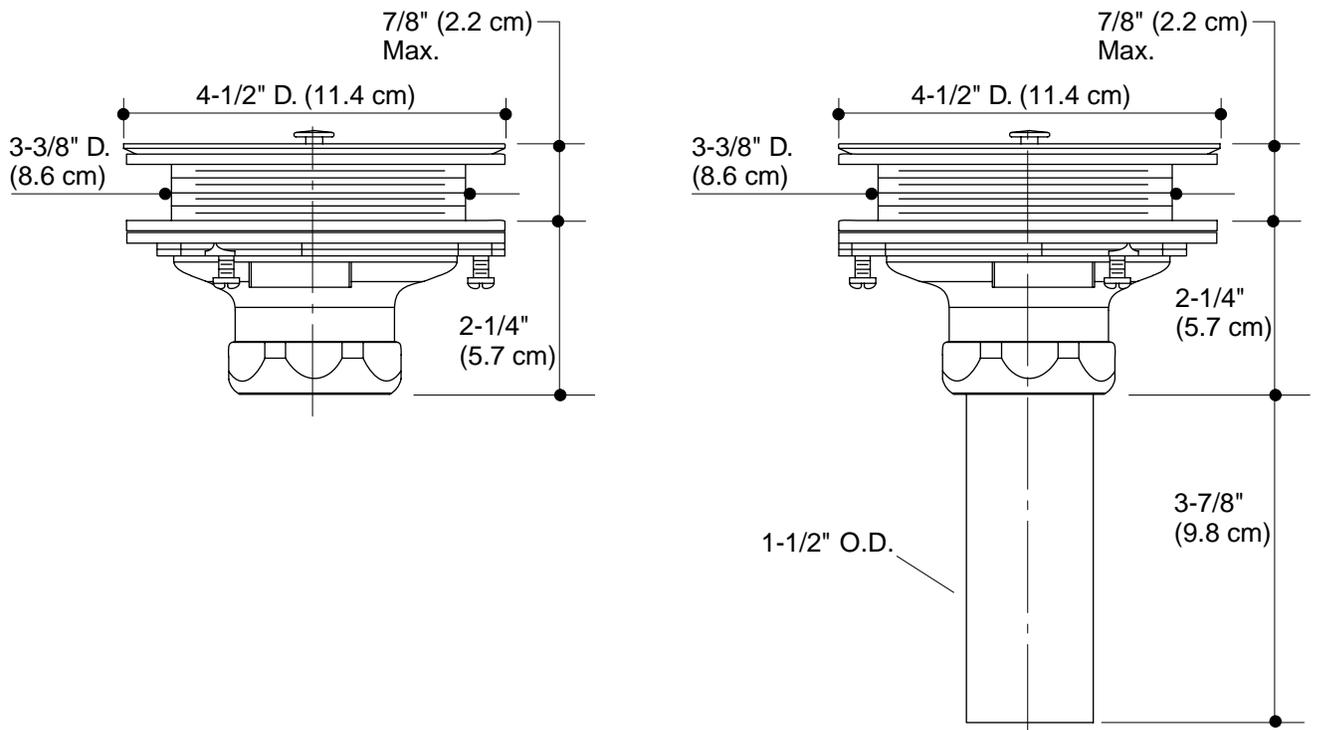

Product Diagram

KITCHEN SINK FAUCET


K-647

ALSO K-R648, K-649

ADA

Features

- Metal construction
- One-piece, self-contained ceramic disc valve allows both volume and temperature control
- Temperature memory allows faucet to be turned on and off at any temperature setting
- High-temperature limit setting for added safety
- Flexible connections for easy installation
- 2.2 gpm (8.3 lpm) flow rate
- ADA compliant remote lever handle
- Asymmetrical design
- Integral pullout spray with retractable hose
- Available with 9" (22.9 cm) or 8" (20.3 cm) spout reach

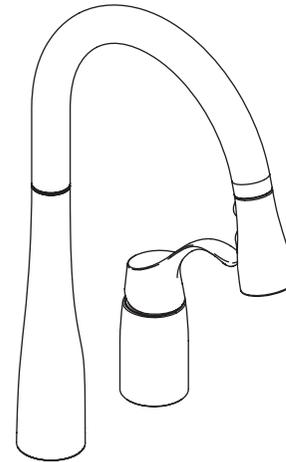

Codes/Standards Applicable

Specified model meets or exceeds the following:

- ASME A112.18.1/CSA B125.1
- Energy Policy Act of 1992
- NSF 61
- IAPMO/cUPC
- ADA

Colors/Finishes

- CP: Polished Chrome
- VS: Stainless Steel
- Other: Refer to Price Book for additional colors/finishes

Specified Model:

Model	Description	Colors/Finishes		
		<input type="checkbox"/> CP	<input type="checkbox"/> VS	<input type="checkbox"/> Other _____
K-647	9" (22.9 cm) spout reach kitchen sink faucet (shown)	<input type="checkbox"/> CP	<input type="checkbox"/> VS	<input type="checkbox"/> Other _____
K-R648	9" (22.9 cm) spout reach kitchen sink faucet with soap/lotion dispenser	<input type="checkbox"/> CP	<input type="checkbox"/> VS	<input type="checkbox"/> Other _____
K-649	8" (20.3 cm) spout reach kitchen sink faucet	<input type="checkbox"/> CP	<input type="checkbox"/> VS	<input type="checkbox"/> Other _____

Product Specification


Kitchen sink faucet with asymmetrical design shall be of metal construction. The valve shall be a one-piece, self-contained ceramic disc valve, allowing volume and temperature control. The valve shall feature temperature memory, allowing the faucet to be turned on and off at any temperature setting. Product shall feature a high-temperature limit stop for added safety, integral pullout spray with retractable hose, and ADA compliant remote lever handle. Product shall include flexible connections for easy installation. Product shall have a 2.2 gallon (8.3 L) per minute flow rate. Product shall be available with a 9" (22.9 cm) or 8" (20.3 cm) spout reach. Kitchen faucet shall be Kohler Model K-_____-_____.

SIMPLICE™

Installation Notes

Install this product according to the installation guide.

Model	A	B	C
K-647/K-R648	9" (22.9 cm)	8-7/8" (22.5 cm)	16-1/8" (41 cm)
K-649	8" (20.3 cm)	7-15/16" (20.2 cm)	14-3/4" (37.5 cm)

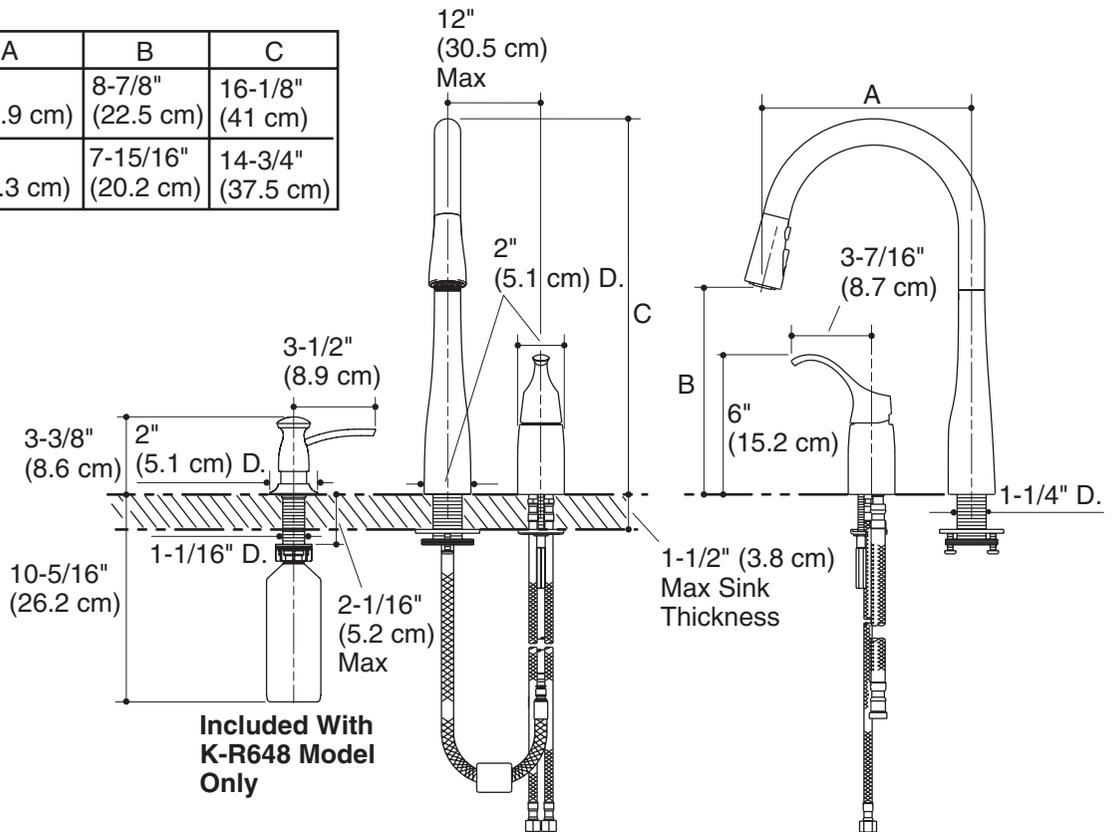

Product Diagram