

TOCCATA™

SELF-RIMMING KITCHEN SINK

K-3346


FEATURES

- 33" (83.8cm) x 22" (55.9cm)
- 19 gauge stainless steel
- Self-rimming
- Double (equal) compartment
- 3-hole (K-3346-3) or 4-hole (K-3346-4) faucet punching
- Includes installation hardware
- Highlighted bowl bead
- Additional highlighting of faucet deck (-H)

CODES/STANDARDS APPLICABLE

Specified model meets or exceeds the following:

ASME/ANSI A112.19.3M

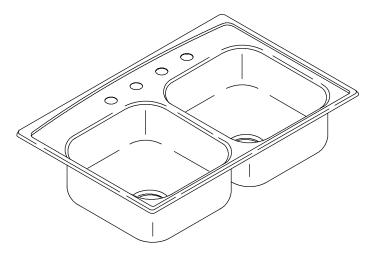

COLORS/FINISHES

NA None Applicable

Accessories:

- CP Polished Chrome
- NA None Applicable
- Other Refer to Price Book for additional finishes

SPECIFIED MODEL:

Model	Description	Colors/Finishes
K-3346-3	3-hole sink	□NA
K-3346-4	4-hole sink	□NA
K-3346-3H	3-hole sink with additional highlighting on faucet deck	□NA
K-3346-4H	4-hole sink with additional highlighting on faucet deck	□NA

Optional Accessories			
K-8801	Duostrainer sink strainer	□СР	□Other
K-3294	Hardwood cutting board		□NA

PRODUCT SPECIFICATION:

The self-rimming sink shall be 33" (83.8cm) in length, and 22" (55.9cm) in width. Sink shall be made of 19 gauge stainless steel. Sink shall be double (equal) compartment. Sink shall be 3-hole (K-3346-3), or 4-hole (K-3346-4) faucet punched. Sink shall include installation hardware. Sink shall have highlighted bowl bead. Sink shall have additional highlighting on faucet deck (-H). Sink shall be Kohler Model K-3346-_______.

TOCCATA TM

PRODUCT INFORMATION


Fixture*:		basin area	water depth
Sink		14-3/16" (36cm) x 15-3/4" (40cm)	8" (20.3cm)
Outlet	3-3/4" D. (9.5cm)		
Faucet holes	1-7/16" D. (3.7cm)		
* Approxima	te measurer	ments for compariso	n only

l	Approximate measurements for cor	riparisori orily.
Ξ	·	

	Included Components:	
ſ	Fastener kit	7256

INSTALLATION NOTES

Cutout is 32-1/2" (82.6cm) x 21-1/2" (54.6cm) with 1/2" radius (1.3cm) corners.

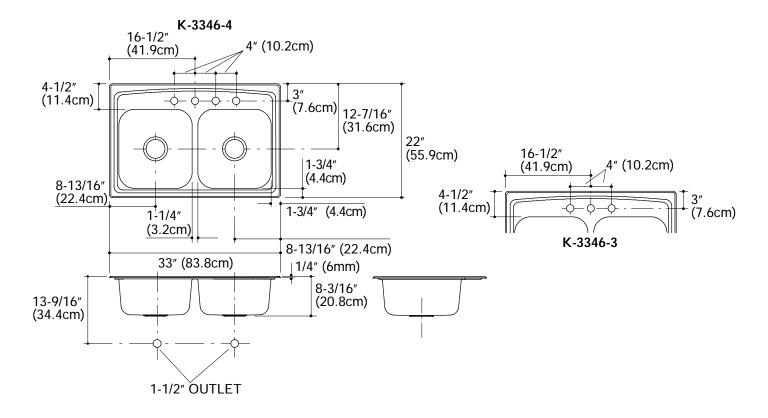

PRODUCT DIAGRAM





BALLAD

Features


- 18 gauge stainless steel
- Self-rimming
- Single compartment
- · Includes installation hardware
- 4-hole (-4), 3-hole (-3), or single-hole (-1)
- 25" (63.5 cm) x 22" (55.9 cm)

Codes/Standards Applicable

Specified model meets or exceeds the following:

- ASME A112.19.3
- IAPMO/UPC
- CSA B45

SELF-RIMMING KITCHEN SINK K-3258



Colors/Finishes

• NA: None applicable

Accessories:

- CP: Polished Chrome
- 0: White
- NA: None applicable
- Other: Refer to Price Book for additional colors/finishes

Specified Model

Model	Description	Color	Colors/Finishes	
K-3258-4	4-hole sink	□ NA	□ NA	
K-3258-3	3-hole sink	□ NA	□ NA	
K-3258-1	Single-hole sink	□ NA	□ NA	
Optional Acc	cessories			
Optional Acc	cessories Bottom basin rack	□ 0 White	☐ Other_	
•		□ 0 White	☐ Other_	
K-3192	Bottom basin rack			

Product Specification

The self-rimming kitchen sink shall be 25" (63.5 cm) in length and 22" (55.9 cm) in width. Sink shall be made of 18 gauge stainless steel. Sink shall be single compartment. Sink shall be 4-hole (-4), 3-hole (-3), or single-hole (-1). Sink shall include installation hardware. Sink shall be Kohler Model K-3258-____.

BALLAD


Technical Information

Fixture*:		
Basin area	21-1/4" (54 cm) x 15-3/4" (40 cm)	
Water depth	8" (20.3 cm)	
Drain hole	3-5/8" (9.2 cm) D.	
Faucet holes	1-7/16" (3.7 cm) D.	
*Approximate measurements for comparison only.		

Included components:	
Fastener pack	1023180

Installation Notes

Install this product according to the installation guide. Cutout is 24-1/2" (62.2 cm) x 21-1/2" (54.6 cm) with 1/2" (1.3 cm) radius corners.

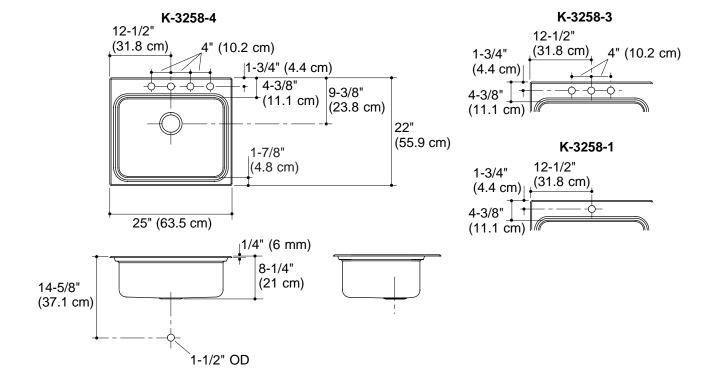





DUOSTRAINER_®


Features

- Brass construction
- For sink installations with 3-1/2" (8.9 cm) or 4" (10.2 cm) outlet
- Removable basket strainer with open/close stopper
- 1-1/2" connection


Codes/Standards Applicable

Specified model meets or exceeds the following:

- ASME A112.18.1
- CSA B125
- IAPMO/UPC







Colors/Finishes

- CP: Polished Chrome
- PB: Polished Brass
- Other: Refer to Price Book for additional colors/finishes

Specified Model:

Model	Description	Colors/Finishes		
K-8799	Sink strainer less tailpiece	□СР	□ PB	
K-8801	Sink strainer with tailpiece	□СР	□ PB	□Other

PRODUCT SPECIFICATION


Duostrainer sink strainer shall be of brass construction. Product shall feature removable basket strainer with an open/close stopper, and 1-1/2" connection. Product is intended for sink installations with 3-1/2" (8.9 cm) or 4" (10.2 cm) outlet. Optional feature shall be a brass tailpiece. Strainer shall be Kohler Model K-_____-___.


USA: 1-800-4-KOHLER Canada: 1-800-964-5590 kohler.com

DUOSTRAINER_®

Installation Notes

Install this product in accordance with the installation instructions.



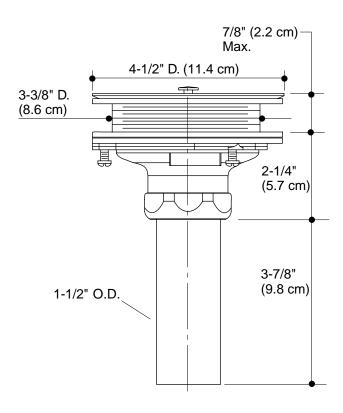

Product Diagram





FAIRFAX ®

Features

- Metal construction
- 9" (22.9 cm) swing spout reach
- One-piece, self-contained ceramic disc valve allows both volume and temperature control
- Temperature memory allows faucet to be turned on and off at any temperature setting
- High-temperature limit stop for added safety
- 2.2 gallons (8.3 L) per minute
- Lower flow aerator options are available (refer to the Kohler Price Book)
- Flexible connections for easy installation
- Matching finish sidespray
- Lever handle


Codes/Standards Applicable

Specified model meets or exceeds the following:

- ADA
- ASME A112.18.1
- CSA B125
- IAPMO/UPC
- NSF 61
- Energy Policy Act of 1992 (EPACT)

KITCHEN SINK FAUCET K-12173

ADA

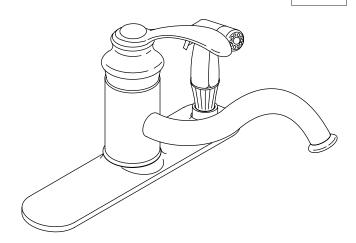

Colors/Finishes

- CP: Polished Chrome
- BN: Brushed Nickel
- Other: Refer to Price Book for additional colors/finishes

Specified Model:

Model	del Description Colors/Finishes		es	
K-12173	Kitchen sink faucet with matching finish sidespray	□ CP	□ BN	□Other
Optional A	ccessory			
K-12001	Plug button		□Other	

PRODUCT SPECIFICATION


Single-control kitchen sink faucet shall be of metal construction. Product shall have a one-piece, self-contained ceramic disc valve allowing both volume and temperature control. Product shall feature temperature memory allowing the faucet to be turned on and off at any temperature setting and a high-temperature limit stop for added safety. Product shall feature a 9" (22.9 cm) swing spout reach. Product shall include flexible connections, a lever handle, and a matching finish sidespray. Product shall have a flow rate of 2.2 gallons (8.3 L) per minute with lower flow aerator options available (refer to the Kohler Price Book). Product shall complement the Fairfax Suite. Faucet shall be Kohler Model K-12173-___.

kohler.com

FAIRFAX ®

Installation Notes

Install this product according to the installation guide.

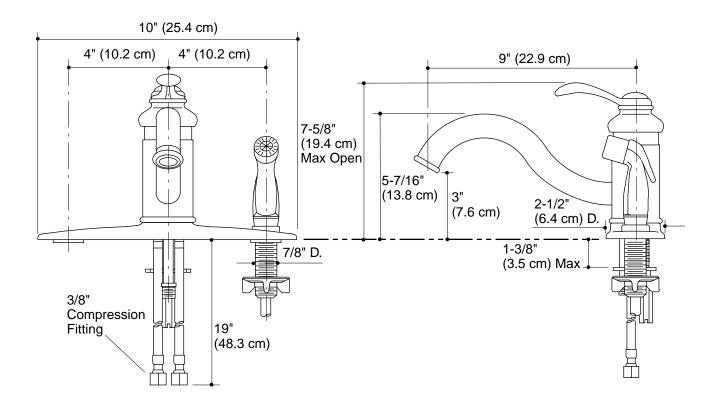

Product Diagram





TRANSITIONAL DESIGN

Features

- · Brass construction
- Intended for kitchen sink and bathroom lavatory installations
- Refillable from the top side
- 16 fluid ounce (.5 L) capacity
- 3-5/16" (8.4 cm) high pump
- 3-3/8" (8.6 cm) long spout

Codes/Standards Applicable

Specified model meets or exceeds the following:

None applicable

SOAP/LOTION DISPENSER K-1893



Colors/Finishes

- · CP: Polished Chrome
- Other: Refer to Price Book for additional colors/finishes


Specified Model:

Model	Description	Colors/Finishes	
K-1893	Soap/lotion dispenser - transitional design	□СР	☐ Other

PRODUCT SPECIFICATION

Transitional design soap/lotion dispenser shall be of brass construction. Product shall feature 3-5/16" (8.4 cm) high pump, 3-3/8" (8.6 cm) long spout, and is refillable from the top side. Product is intended for kitchen sink and bathroom lavatory installations and has a 16 fluid ounce (.5 L) capacity. Soap/lotion dispenser shall be Kohler Model K-1893-____.

TRANSITIONAL DESIGN

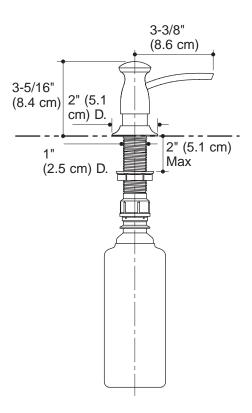

Product Diagram

