

### Features

- One-piece toilets integrate the tank and bowl into a seamless, easy-to-clean design.
- Elongated bowl offers added room and comfort.
- Comfort Height® feature offers chair-height seating that makes sitting down and standing up easier for most adults.
- 1.28 gallons per flush (gpf).
- 2-1/8-inch glazed trapway.
- Standard left-hand Polished Chrome trip lever included.
- Supply line not included.
- Coordinates with other products in the Cimarron collection.
- Flush valve's 3: 2 ratio harnesses the natural force of gravity and optimizes flush performance

### Technology

- Durable canister design has 90% less exposed seal material than a 3-inch flapper, for leak-free performance.
- Single-flush gravity uses the force of gravity and a precision-engineered tank, bowl, and trapway to create a strong siphon during flushing.
- AquaPiston canister allows water to flow into the bowl from all sides (360 degrees), increasing the power and effectiveness of the flush.
- Flush valve's 3: 2 ratio harnesses the natural force of gravity and optimizes flush performance.
- Durable canister design has 90% less exposed seal material than a 3-inch flapper, for leak-free performance.
- Light-touch canister flush requires a lower actuation force than a flapper.

### Installation

- Standard 12-inch rough-in.

### Water Conservation & Rebates

- WaterSense® toilets meet strict EPA flushing guidelines, including using at least 20 percent less water than 1.6-gallon toilets.
- Eligible for consumer rebates in some municipalities.



For complete listing of available colors, go to [kohler.com](http://kohler.com).



ADA

CSA B651

OBC

### Codes/Standards

ASME A112.19.2/CSA B45.1

ADA

ICC/ANSI A117.1

EPA WaterSense®

CSA B651


OBC

### KOHLER® One-Year Limited Warranty

See website for detailed warranty information.

### Product Specification

Toilet shall be made of vitreous china. Toilet shall be 29-5/16" (745 mm) in length, 18-15/16" (481 mm) in width, and 28-13/16" (732 mm) in height. Toilet shall be one-piece. Toilet shall be 1.28 gpf (4.8 lpf). Toilet shall be left-hand trip lever. Toilet shall be Comfort Height®. Toilet shall be a 12" (305 mm) rough-in. Toilet shall be Kohler Model K-3828.

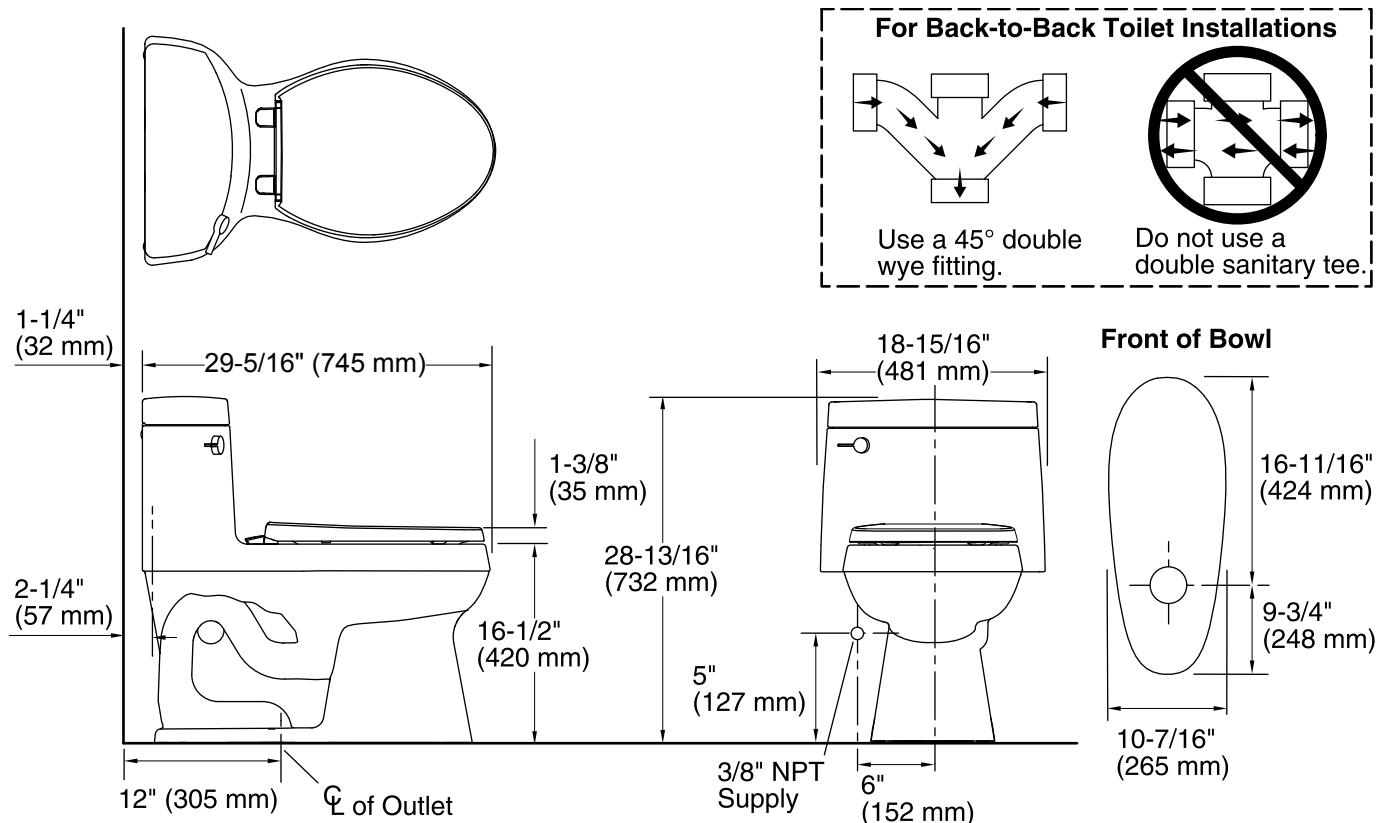

## Technical Information

All measurements are approximate only.

Toilet style:	One-piece
Bowl shape:	Elongated front
Passageway:	2-1/8" (54 mm)
Flush rate - full:	1.28 gpf (4.8 lpf)
Water area:	11-3/4" x 8" (298 mm x 203 mm)
Water depth from rim:	6-1/8" (156 mm)
Rough-in:	12" (305 mm)
Seat hole centers:	5-1/2" (140 mm)

## Installation Notes

Install this product according to the installation guide.

For back-to-back toilet installations: Use only a 45° double wye fitting.

K-4650 is the recommended toilet seat for public use accessible installations.

The Model Plumbing Codes require the installation of elongated open-front toilet seats in public bathrooms.

ADA, OBC, CSA B651 compliant when installed to the specific requirements of these regulations.