

# INSTALLATION INSTRUCTIONS

For Model P4440-084-L / P4440-37B-L (Portable Unit) (09/05/2019)

**WARNING! SHUT POWER OFF AT FUSE OR CIRCUIT BREAKER.**

**AVERTISSEMENT! COUPER LE COURANT AU NIVEAU DES FUSIBLES OU DU DISJONCTEUR.**

## WARNING

- Risk of shock, do not plug in the unit before assembly is complete.
- Do not exceed the maximum wattage rating. (NE PAS DEPASSER LA PUISSANCE NOMINALE MAXIMALE!)
- Before you begin assembly of your new fixture, please follow the instruction manual step by step.



## MOUNTING THE LUMINAIRE, PLUG VERSION (Fig.1) For hardware version see Fig.2 & Fig.3

1. Carefully unpack your new fixture and lay out all the parts on a clear area. Take care not to lose any small parts necessary for installation.

Fig.1(FOR SOLID WALL)

2. Drill four (6mm) diameter holes in the proper position on the wall according to the mounting location of the fixture. Insert the plastic anchors (A).
  3. Secure the mounting plate (B) to wall using the screws (C).
- Fig.1-1(FOR HOLLOW WALL)
- 2-1. Drill four (16mm) diameter holes in the proper position on the wall according to the mounting location of the fixture.

- 3-1. Pass crown bolt (O) and the toggle bolt anchor (Q) through the keyhole on the mounting plate (B), then carefully push the toggle bolt anchor (Q) into the hole in the wall. Screw crown bolt (O) which will tighten the mounting plate (B) to the wall.
4. Place the fixture body (D) over mounting plate (B) and secure with screws (E).
5. Install the cord cover bracket (H) with screws (C) and anchors (A) to the wall. Fix the cord into the cord cover (J) and snap the cord cover (J) into the bracket (H).
6. Install (2) two GU-10 base bulbs up to 50 watts or CFL or LED equivalent in accordance with the fixture specification. (DO NOT EXCEED THE MAXIMUM WATTAGE RATING) (NE PAS DEPASSER LA PUISSANCE NOMINALE MAXIMALE!)

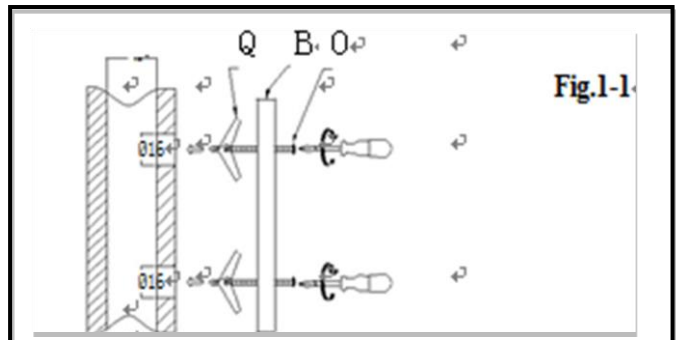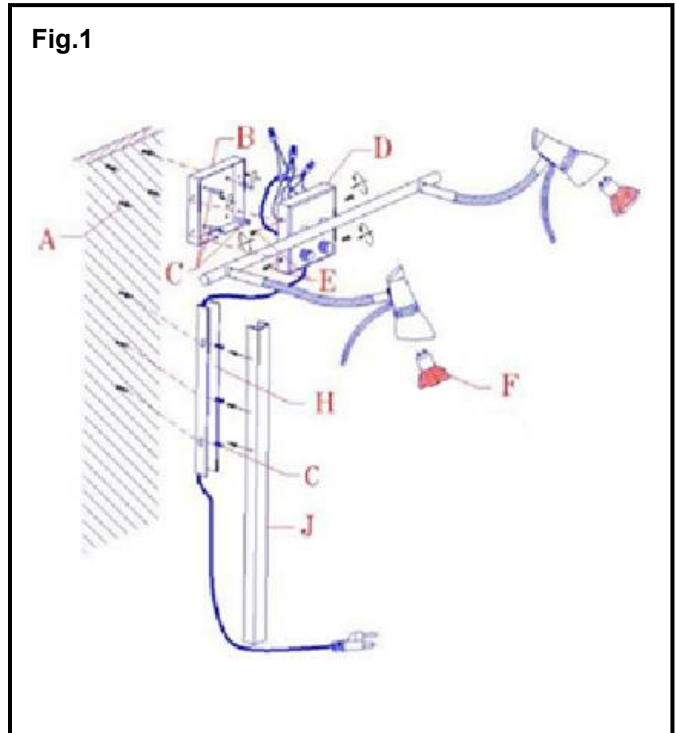

## IMPORTANT SAFETY INSTRUCTIONS

Lighted lamp is HOT! Turn off the fixture and allow to cool for 10 minutes prior to touching the bulb.

**WARNING – TO REDUCE THE RISK OF FIRE, ELECTRIC SHOCK, EXPOSURE TO EXCESSIVE UV RADIATION, OR INJURY TO PERSONS:**

**WARNING:** In handling of halogen bulb, care should be taken not to touch it with your bare hands. Oil residue will shorten the life of the halogen bulb. If you accidentally come in contact, wipe thoroughly with a clean, lint-free, cotton cloth. Allow the bulb to cool for 10 minutes before changing the bulb.

1. Turn off/unplug and allow to cool before replacing the bulb.
2. Bulb gets HOT quickly! Only contact switch/plug when turning on.
3. Do not touch hot lens, guard, or enclosure.
4. Do not remain in light if skin feels warm.
5. Do not look directly at lighted lamp.
6. Keep lamp away from materials that may burn.
7. Use only with a 50 watt or smaller bulb.
8. Do not touch the bulb at any time. Use a soft cloth. Oil from skin may damage the bulb.
9. Do not operate the portable luminaries with a missing or damaged guard, lamp containment barrier, or UV filter.

**SAVE THESE INSTRUCTIONS**

# INSTALLATION INSTRUCTIONS

For Model P4440-084-L / P4440-37B-L (Fixture Unit) (09/05/2019)

**WARNING! SHUT POWER OFF AT FUSE OR CIRCUIT BREAKER.**  
**AVERTISSEMENT! COUPER LE COURANT AU NIVEAU DES FUSIBLES OU DU DISJONCTEUR.**

## MOUNTING THE FIXTURE, HARDWARE VERSION

(Fig. 2 & Fig. 3)

1. Shut off power at the circuit breaker and remove old fixture from wall, including the mounting hardware.
2. Remove the cord and plug by disconnecting the wire nuts to the cord. **(NOTE: CAN NOT REINSTALL AS A PLUG IN ONCE THE CORD AND PLUG HAVE BEEN CUT OFF)** (Please do not throw away the wire nuts after disconnecting wires.)
3. Secure the mounting bracket (A) to the outlet box using the screws (B). The side of the mounting bracket (A) marked "GND" must face out (Fig.2).

## CONNECTING THE WIRES (Fig. 3)



5. Connect the electrical wires as shown in Fig. 3, making sure that all wire connectors are secured. If your outlet has a ground wire (green or bare copper), connect the fixture's ground wire to it. Otherwise, connect the fixture's ground wire directly to the mounting bracket (A) by using the green screw provided.

## COMPLETING THE INSTALLATION (Fig. 2)

6. Place fixture body (D) over the mounting bracket (A) and with four screws (E).
7. Insert the plug into the hole on the bottom of the fixture body (C).
8. Install (2) two GU-10 base bulbs up to 50 watts or CFL or LED equivalent in accordance with the fixture specification. **(DO NOT EXCEED THE MAXIMUM WATTAGE RATING!)** (NE PAS DEPASSER LA PUISSANCE NOMINALE MAXIMALE!)

Your installation is now complete. Return power to the outlet box and test the fixture.

**IMPORTANT: FIXTURE SHOULD BE INSTALLED BY A QUALIFIED ELECTRICIAN TO ENSURE PROPER WIRING AND INSTALLATION.**

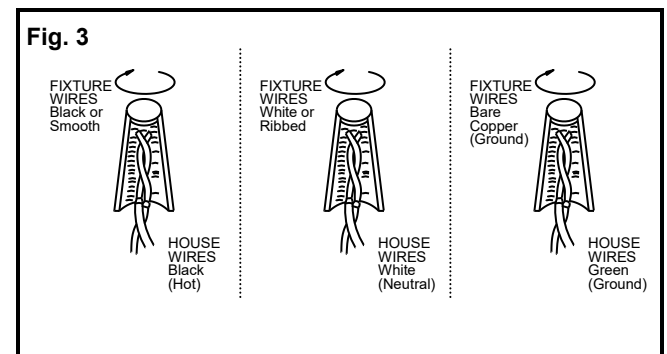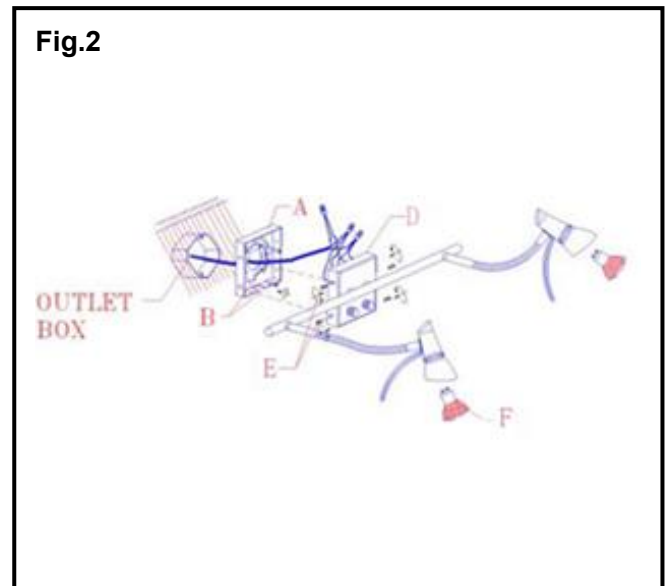

**IN AN ONGOING EFFORT TO BE ENVIRONMENTALLY FRIENDLY AND IN COMPLIANCE WITH CALIFORNIA TITLE 20 AN ENERGY SAVING COMPACT LED BULB(S) IS INCLUDED.**