

INSTALLATION INSTRUCTIONS

Item#P1883-084C (New. 08/03/2023)

READ AND SAVE THESE INSTRUCTIONS

WARNING! SHUT POWER OFF AT FUSE OR CIRCUIT BREAKER.
AVERTISSEMENT! COUPER LE COURANT AU NIVEAU DES FUSIBLES OU DU DISJONCTEUR.

ASSEMBLING THE FIXTURE (Fig. 1)

1. Shut off power at the fuse box or circuit breaker and remove the old fixture, including mounting hardware.
2. Carefully unpack your new fixture from carton and check that all parts are included as shown in the illustration.
3. Loosen set screw and adjusting wire length through canopy (A). Once hanging length is determined, tighten set screw to secure.

HANGING THE FIXTURE (Fig. 2)

4. Thread canopy screws into pre-drilled holes in circular strap. Spaced same distance apart as holes in canopy (A). Secure with the nuts provided. The length of canopy screws may be adjusted if necessary.
5. Attached circular strap to outlet box (not included) using mounting screws (Size: #8-32N*L1"). The side of circular strap marked with "GND" must face out.

CONNECTING THE WIRE (Fig. 3 & 2)

6. Connect the electrical wire as shown in Fig. 3, making sure that all wire connectors are secured. If your outlet box has a ground wire (green or bare copper), connect fixture's ground wire and ceiling canopy's ground wire to it. Otherwise, connect fixture's ground wire directly to circular strap using ground screw provided.
7. Tuck wire connections neatly into the outlet box..
8. Raise canopy (A) over canopy screws and secure with cap nuts. (Fig.2)

FINISHING THE FIXTURE (Fig.1)

9. Install (1) one medium base bulb (C) up to 60 watts or CFL or LED equivalent (not included) in accordance with the fixture specification—DO NOT EXCEED THE MAXIMUM WATTAGE RATING! (NE PAS DEPASSER LA PUISSANCE NOMINALE MAXIMALE!).

Your installation is now complete. Return power to the outlet box and test the fixture.

Note: Illustration (Fig.1) on this manual is for installation purposes only. It may or may not be identical to the fixture purchased.

Fig. 1

Set# A-020

- Circular Strap
- Ground Screw
- Mounting Screw *2

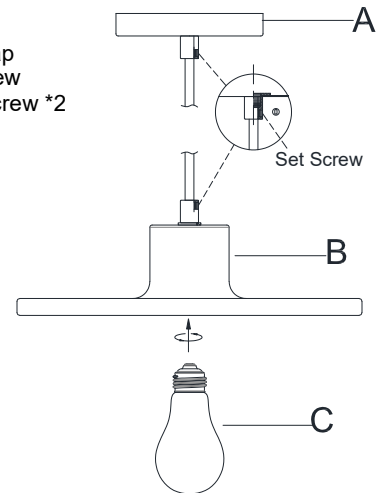


Fig. 2


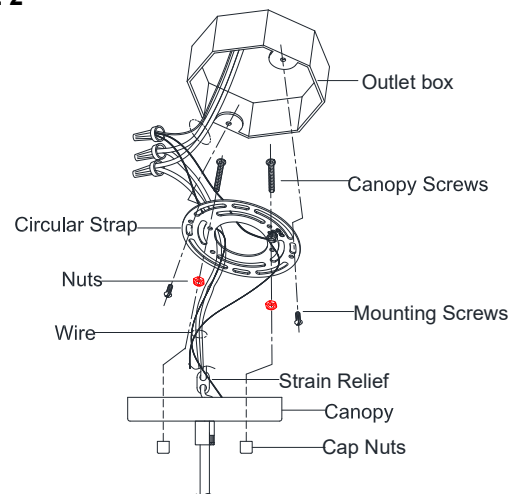


Fig. 3

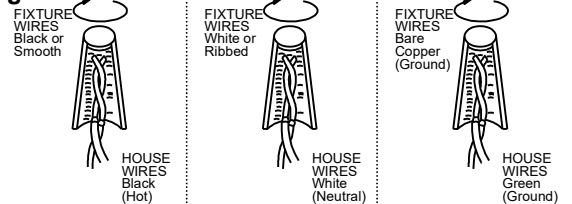

P1883-084C