

# INSTALLATION INSTRUCTIONS

For Models # P3834 /P3836 (Dated Sep 21, 2009)

**WARNING! SHUT POWER OFF AT FUSE OR CIRCUIT BREAKER**  
**AVERTISSEMENT! COUPER LE COURANT AUNIVEAU DES FUSIBLES OU DU DISJONCTEUR**

## HANGING THE FIXTURE (Fig. 1)

1. Carefully remove the fixture from the carton and check that all parts are included as shown in the illustration.
2. Shut off power at the circuit breaker.
3. Install screws (B) into crossbar (C).
4. Attach the Crossbar (C) to the Outlet box in the ceiling with two screws (E). The side of the Crossbar with "GND" marked on it and two convex points must face out.
5. At this point, connect the electrical wire as shown in Figure 2, making sure that all wire connectors (A) are secured. If your outlet has a ground wire (green or bare copper), connect the fixture Ground Wire to it. Otherwise, connect the fixture Ground Wire directly to the crossbar using the Green Screw (D) provided.
6. Place the Canopy (F) up to the ceiling and secure by threading the Cap Nuts (G) onto the screws (B).
7. Place the Washer (I) to the fitter then the Large Glass (J) followed a washer (R) and steel gasket (K) secure with threaded sleeve (L).
8. Install washer (M) followed by the inner Glass (N) then washer (O) followed by spacer (P). Secure all with Check ring (Q).
9. Install the light bulb in accordance with the fixture's specifications. **(DO NOT EXCEED THE MAXIMUM WATTAGE RATING!)** NE PAS DEPASSER LA PUISSANCE NOMINALE MAXIMALE

Your installation is now complete. Return power to the junction box and test the fixture.

**IMPORTANT:** Fixture should be installed by a qualified electrician to ensure proper wiring and installation.

Fig. 1


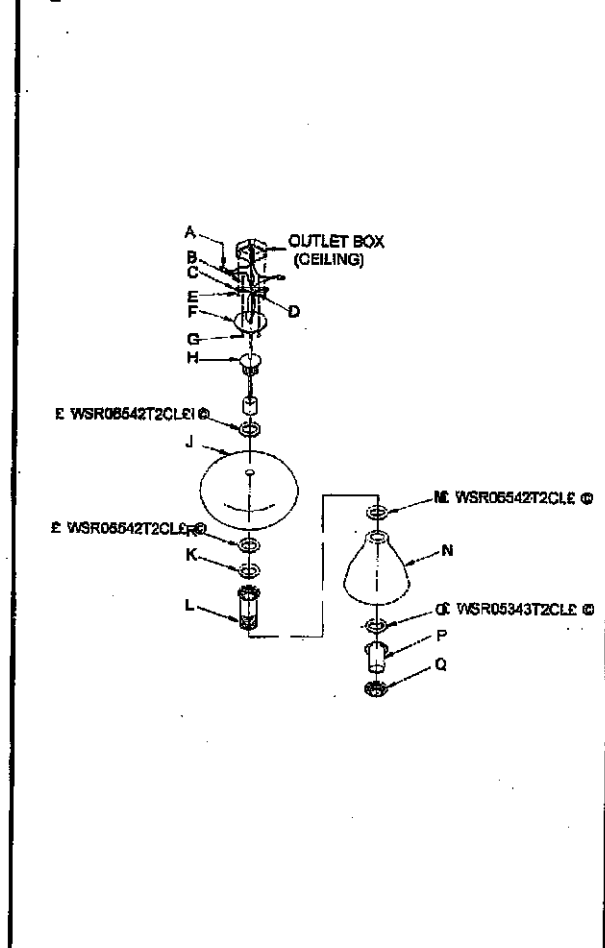


Fig. 2

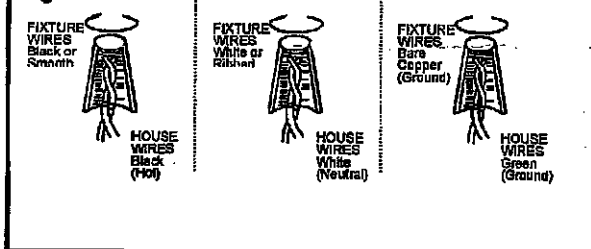

american  
lighting  
association