

KCL-1706

33 Inch Dual Mount Single Bowl Stainless Steel Kitchen Sink and Faucet Set

Kräus®

SPECIFICATION SHEET

Included with Set

Kitchen Sink KHT600-33
Kitchen Faucet KPF-2820SFS
Strainer ST-5
Bottom Grid KBG-600-33

Sink Features

- 18 Gauge Stainless Steel Construction
- Single Bowl Undermount Sink
- Required Minimum Cabinet Size: 36" Left to Right, 24" Front to Back
- Rear Center-Set Drain
- 3 7/8" Drain Opening
- NoiseDefend Undercoating and Sound Dampening Pads

Faucet Features

- Pull Down Faucet
- Brass Body
- ABS Sprayer
- Lead Free Brass Waterway
- 360° Swivel Spout
- Flow Rate: 1.8 gpm (6.8L/min) @ 60 psi
- Dual Function Sprayhead - Spray/Stream
- 25mm Ceramic Cartridge
- 30" Integrated Nylon Waterlines
- Dome Shaped Screen Washer
- Quick Weight
- Quick Connect Sprayer Hose
- 14" Hose Length
- Connections 3/8" Compression
- Max Deck Thickness: 3"
- TPI of aerator in the Sprayer - M16.5*1

Strainer Features

- Premium Stainless Steel construction
- Fits Standard 3 1/2" - 4" Drain Opening
- Open/Close Stopper Prevents Debris from Clogging Drain Pipe

Bottom Grid Features

- Commercial grade stainless steel construction
- Protects bottom of sink from daily wear and tear
- Rubber feet provide additional protection



CODES/STANDARDS:

Sink Certification

cUPC (ASME A112.19.3/CSA B45.4), MASS


Faucet Certification

ASME A112.18.1/CSA B125.1
ADA compliant

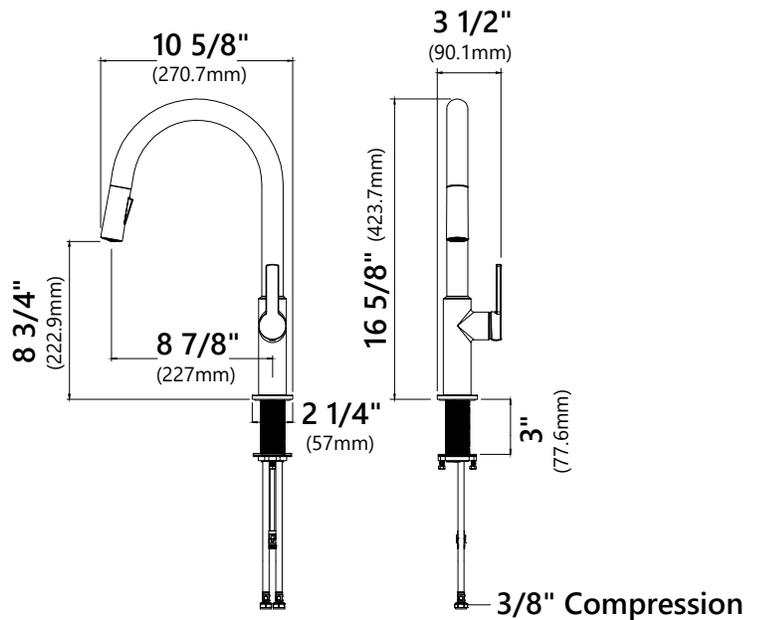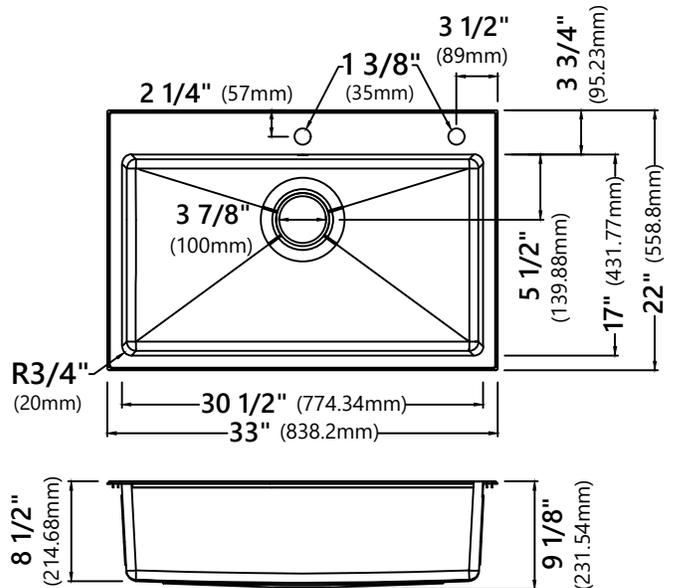

Warranty

Kraus Limited Lifetime Warranty
see website for details www.kraususa.com

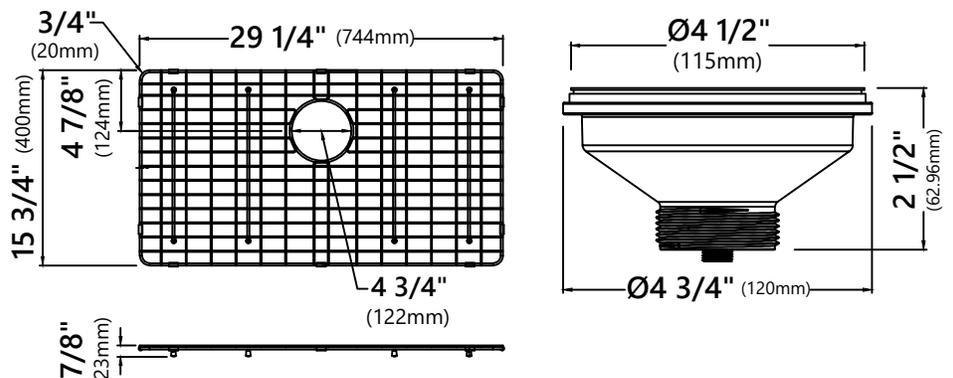

Kraus USA Plumbing LLC Customer Service
1.800.775.0703 | customerservice@kraususa.com

REV. October 24, 2023