



KUZCO

2020 OUTDOOR
INTRODUCTION

C O N T E N T S

VISUAL INDEX	4
BOLLARD	8
WALL	16
CEILING	48

WALL



Carson
p. 29



Canyon
p. 43



Columbia
p. 25



Como
p. 17



Fairfax
p. 27



Varo
p. 37



Runyon
p. 21



Runyon
p. 21



Signal
p. 23



Stato
p. 35



Fairfax
p. 27



Hawthorne
p. 31



Hawthorne
p. 31



Latimer
p. 39



Melrose
p. 41



Sunset
p. 45



Sunset
p. 46



Vortex
p. 33



Wilshire
p. 19

WALL

CEILING



Dakota
p. 49



Elle
p. 51



Moraine
p. 53



Sunset
p. 45



Sunset
p. 45



Como
p. 17



Loki
p. 13



Napa
p. 11



Shinola
p. 15



Sonoma
p. 9

BOLLARDS

SONOMA.

EB3024 / EB3036

Designed to emulate rectilinear architectural forms the Sonoma exterior bollard radiates light downwards through the four openings in the structure. The gaps serve to elevate the die-cast aluminum square housing higher while providing ample space to radiate the LED luminance. Available in two heights for a cultivated exterior environment.

● BK—Black | Custom Options Available



EB3036-BK



EB3024-BK

EB3036-BK

SPECIFICATIONS DETAILS

+ For custom options, consult factory for details.


	EB3024	EB3036
FIXTURE DIMENSIONS	L6-3/8" x W6-3/8" x H24"	L6-3/8" x W6-3/8" x H36"
LAMP TYPE	LED Board	LED Board
WATTAGE	23W	23W
TOTAL LUMENS	2100lm	2100lm
DELIVERED LUMENS	1376lm	1376lm
COLOR TEMPERATURE	3000K	3000K
CRI (RA)	>80	>80
OPTIONAL COLOR TEMPS	2700K – 5000K Available, MOQ May Apply	2700K – 5000K Available, MOQ May Apply
LED RATED LIFE	50,000 hours	50,000 hours
DIMMABLE	No	No
DIFFUSER DETAILS	Clear High Impact Glass	Clear High Impact Glass
LIGHT SOURCE	LED with DC Driver	LED with DC Driver
VOLTAGE	120-277V	120-277V
WARRANTY	5 Years	5 Years

NAPA.

EB2924 / EB2936

Architectural designed high powered LED exterior bollard fixture, die-cast aluminum square-shaped housing with four rectangular-shaped openings which radiates the light downward and throughout all openings and surrounding areas of the bollard. Certified ETL wet location rated and is available in two different heights.

● BK—Black | Custom Options Available

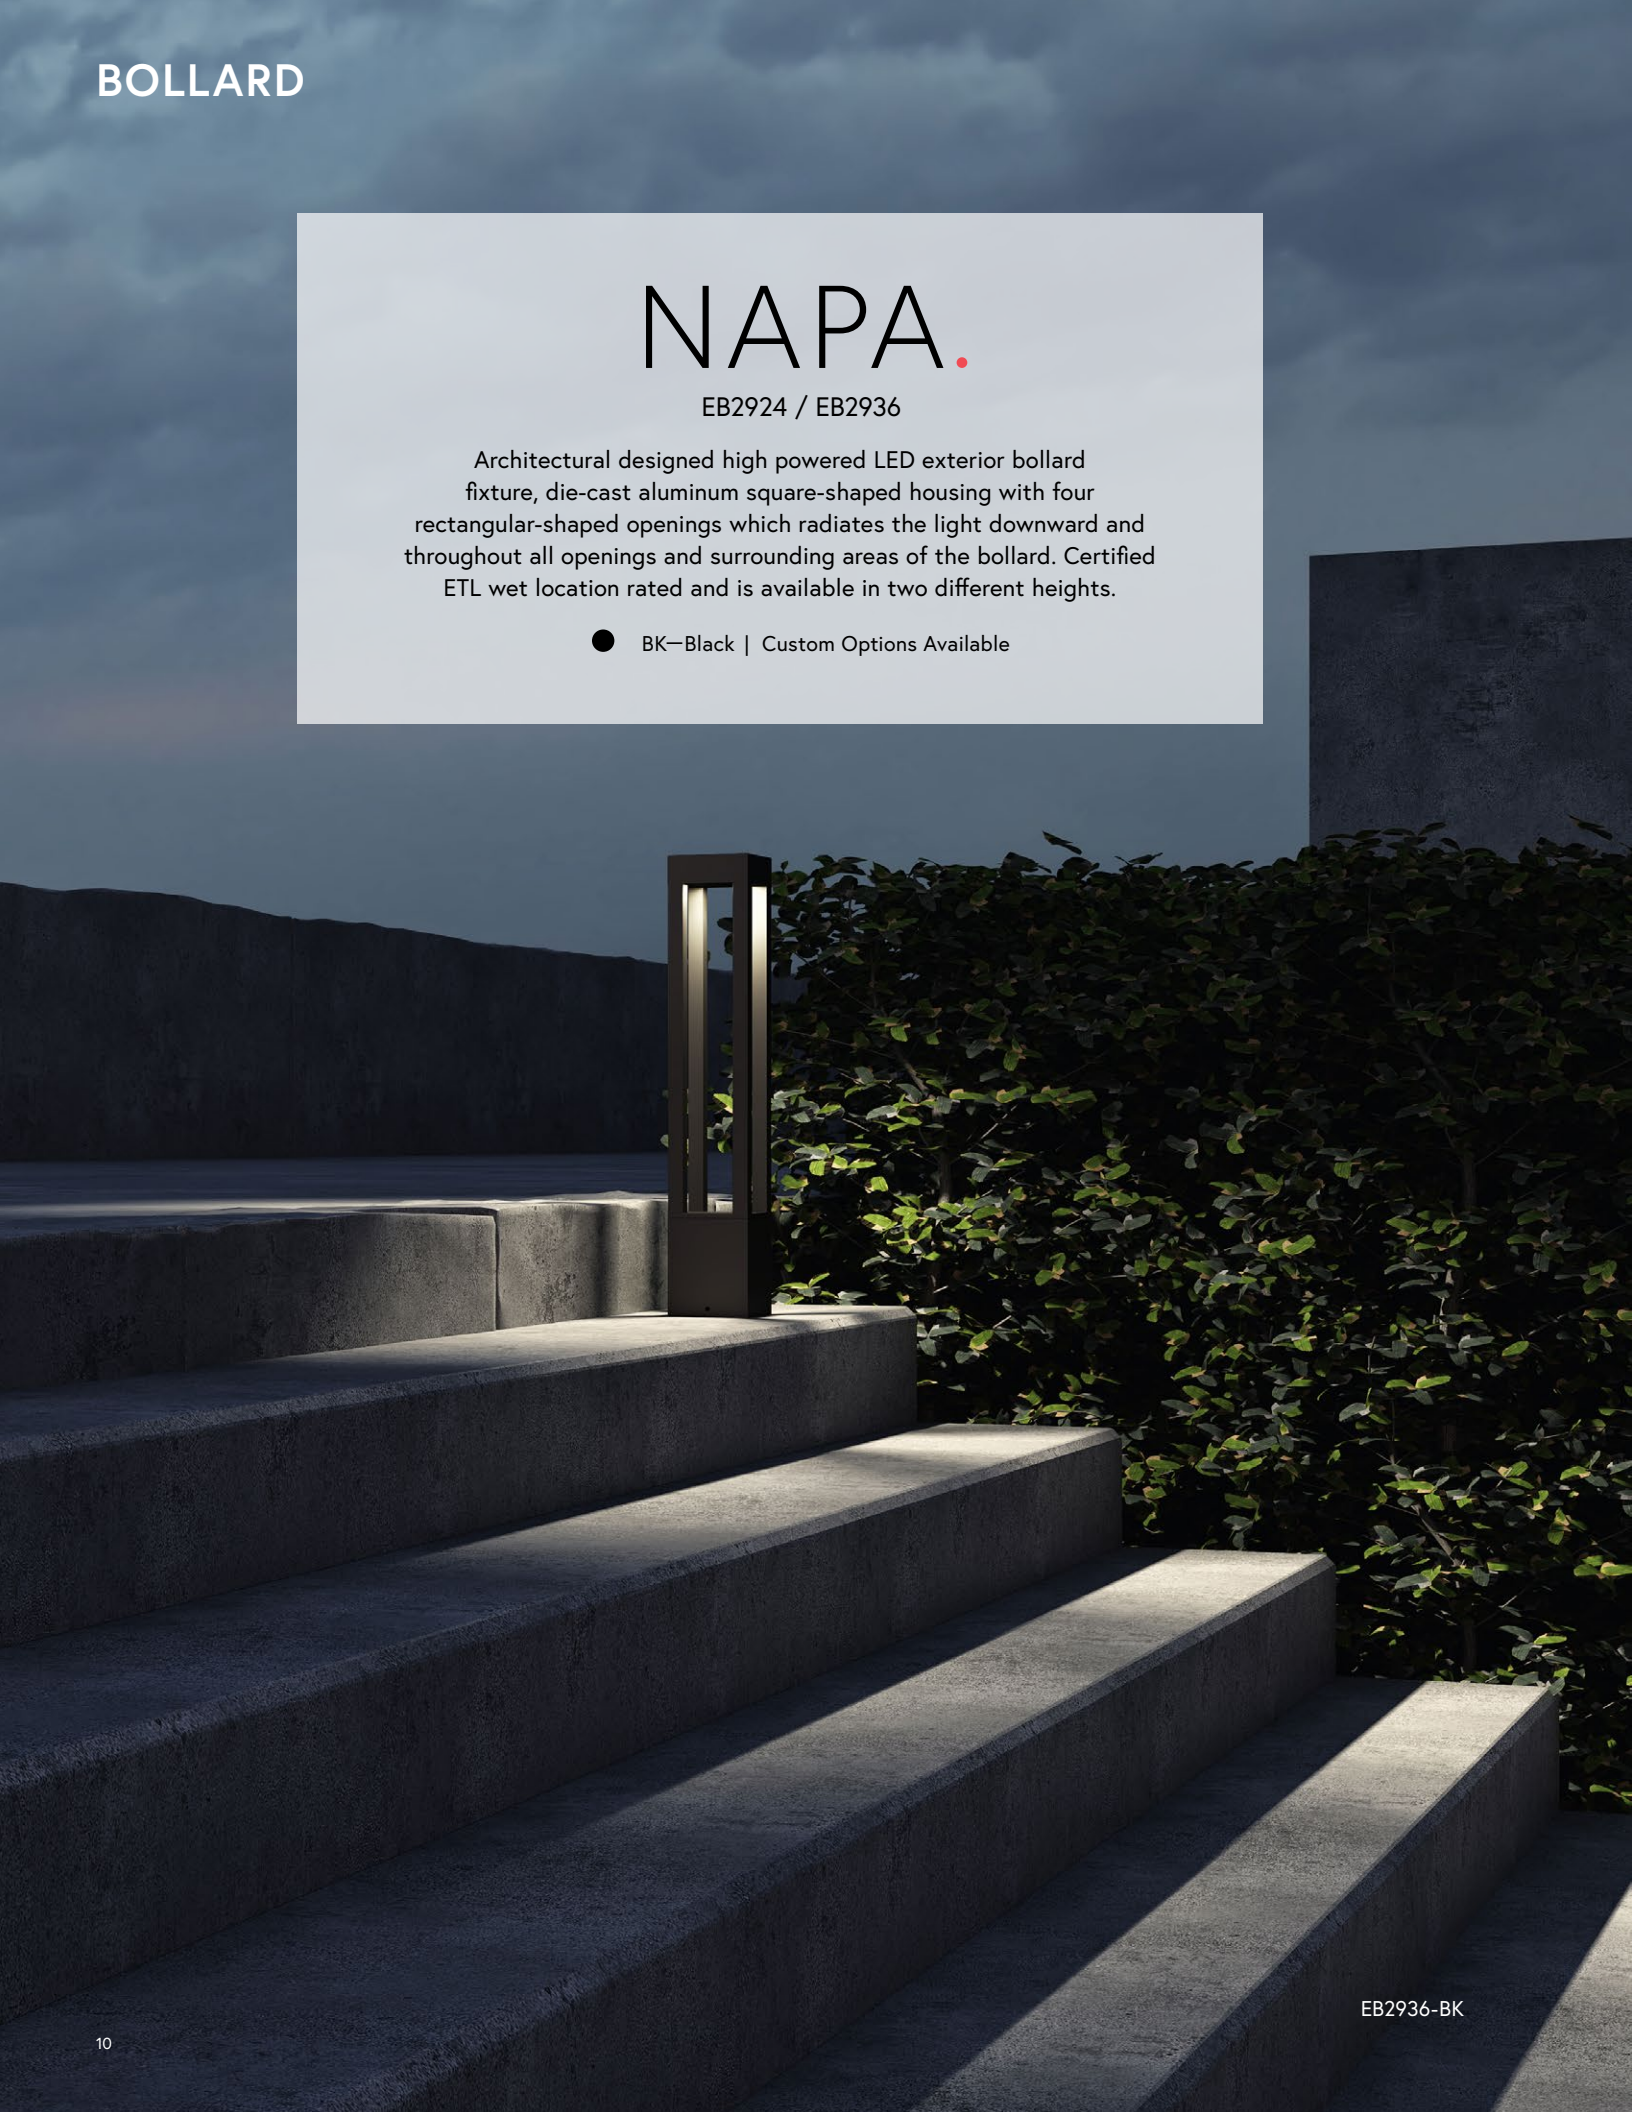

EB2936-BK



EB2924-BK

EB2936-BK

SPECIFICATIONS DETAILS

+ For custom options, consult factory for details.

	EB2924	EB2936
FIXTURE DIMENSIONS	L6-3/8" x W6-3/8" x H24"	L6-3/8" x W6-3/8" x H36"
LAMP TYPE	LED Board	LED Board
WATTAGE	23W	23W
TOTAL LUMENS	2100lm	2100lm
DELIVERED LUMENS	1376lm	1376lm
COLOR TEMPERATURE	3000K	3000K
CRI (RA)	>80	>80
OPTIONAL COLOR TEMPS	2700K – 5000K Available, MOQ May Apply	2700K – 5000K Available, MOQ May Apply
LED RATED LIFE	50,000 hours	50,000 hours
DIMMABLE	No	No
DIFFUSER DETAILS	Clear High Impact Glass	Clear High Impact Glass
LIGHT SOURCE	LED with DC Driver	LED with DC Driver
VOLTAGE	120-277V	120-277V
WARRANTY	5 Years	5 Years

LOKI.

EB39824 / EB39924

An impressive orthogonal light column, the exterior fixture denotes modern sophistication and a minimalist aesthetic. Cast-aluminum planes frame the rectangular inset diffuser that produces a uniform outwards illumination. Available in black powder-coated finishes and optional light orientation, either as a one-directional lamp or dual emitting variation.

● BK—Black | Custom Options Available



EB39824-BK




EB39924-BK

SPECIFICATIONS DETAILS

+ For custom options, consult factory for details.

	EB39824	EB39924
FIXTURE DIMENSIONS	L4" x W2" x H23-3/4"	L4" x W2" x H23-3/4"
LAMP TYPE	LED Board	LED Board
WATTAGE	7W	12W
TOTAL LUMENS	735lm	1260lm
DELIVERED LUMENS	510lm	1002lm
COLOR TEMPERATURE	3000K	3000K
CRI (RA)	>80	>80
OPTIONAL COLOR TEMPS	2700K – 5000K Available, MOQ May Apply	2700K – 5000K Available, MOQ May Apply
LED RATED LIFE	50,000 hours	50,000 hours
DIMMABLE	No	No
DIFFUSER DETAILS	White PC Diffuser	White PC Diffuser
LIGHT SOURCE	LED with DC Driver	LED with DC Driver
VOLTAGE	120-277V	120-277V
WARRANTY	5 Years	5 Years

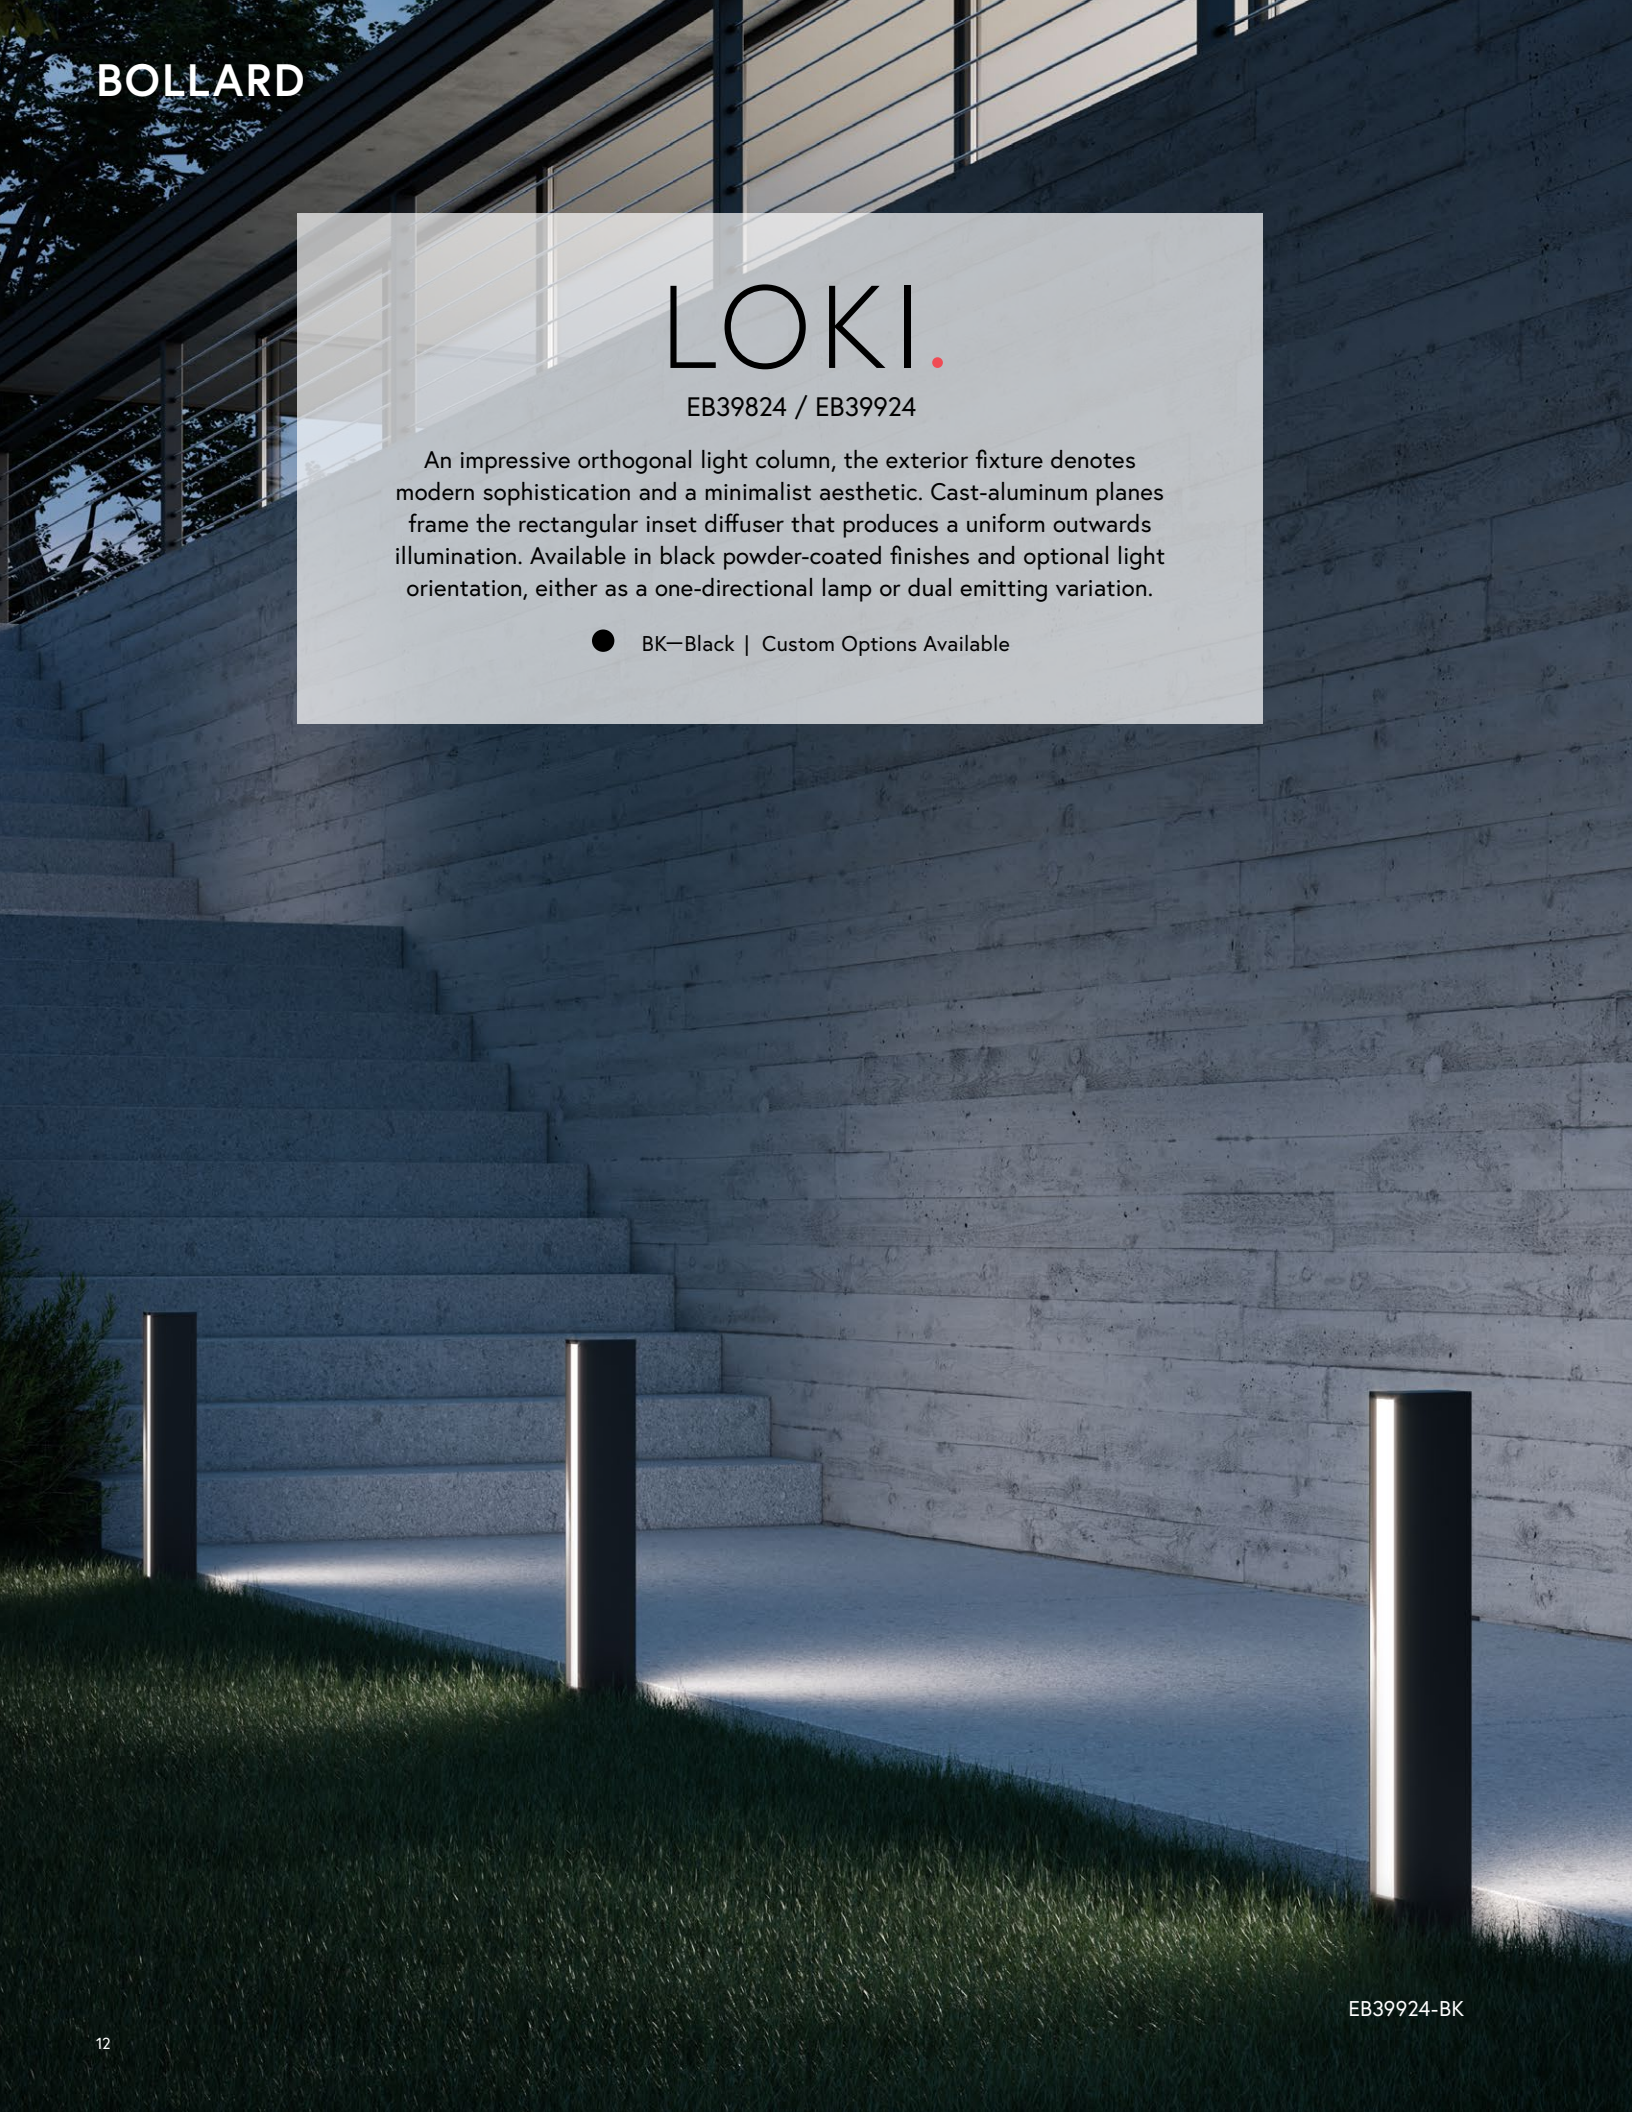

EB39924-BK



SHINOLA.

EB48132 / EB48240

Utilizing bounce lighting technique the Shinola bollard range creates a glare-free light spread. With the LED sources concealed inside the cylindrical cast-aluminum cap light is directed downwards and reflects off the optical cone diffuser. A transparent polycarbonate tube seals the radiant chamber that adorns the top of the substantial column base. Available in two sizes and Black powder-coated finish.

● BK—Black | Custom Options Available

EB48240-BK



EB48132-BK



EB48240-BK

SPECIFICATIONS DETAILS

+ For custom options, consult factory for details.

	EB48132	EB48240
FIXTURE DIMENSIONS	D4-3/4" x H31-3/8"	D6-3/8" x H39-1/2"
LAMP TYPE	LED Board	LED Board
WATTAGE	13W	20W
TOTAL LUMENS	1365lm	2100lm
DELIVERED LUMENS	750lm	1655m
COLOR TEMPERATURE	3000K	3000K
CRI (RA)	>80	>80
OPTIONAL COLOR TEMPS	2700K – 5000K Available, MOQ May Apply	2700K – 5000K Available, MOQ May Apply
LED RATED LIFE	50,000 hours	50,000 hours
DIMMABLE	No	No
DIFFUSER DETAILS	Clear PC	Clear PC
LIGHT SOURCE	LED with DC Driver	LED with DC Driver
VOLTAGE	120-277V	120-277V
WARRANTY	5 Years	5 Years

COMO.

EW48302 / EB48314 / EB48328

Behind the circular flat surface of the die-cast aluminum cap is an assemblage of LED sources directed outwards and sealed with a clear polycarbonate lens. As a surface mount used in multiples the reductive shape encourages both austere and complex alignments. An extension of the Como series places the truncated cylinder at the peak of a tubular post resulting in an elegant pathway lighting solution.

Available in multiple configurations and Black powder-coated finish.

● BK—Black | Custom Options Available



EW48302-BK



EB48314-BK



EB48328-BK

SPECIFICATIONS DETAILS

+ For custom options, consult factory for details.

	EW48302	EB48314	EB48328
FIXTURE DIMENSIONS	D5-1/4" x E4-1/4"	D5-1/4" x H13-5/8"	D5-1/4" x H27-5/8"
LAMP TYPE	LED Board	LED Board	LED Board
WATTAGE	6W	6W	6W
TOTAL LUMENS	630lm	630lm	630lm
DELIVERED LUMENS	434lm	434lm	434lm*
COLOR TEMPERATURE	3000K	3000K	3000K
CRI (RA)	>80	>80	>80
OPTIONAL COLOR TEMPS	2700K – 5000K Available, MOQ May Apply	2700K – 5000K Available, MOQ May Apply	2700K – 5000K Available, MOQ May Apply
LED RATED LIFE	50,000 hours	50,000 hours	50,000 hours
DIMMABLE	Yes	Yes	Yes
DIMMING PERCENTAGE	100% – 10%	100% – 10%	100% – 10%
DIFFUSER DETAILS	Clear PC	Clear PC	Clear PC
VOLTAGE	120V	120V	120V
WARRANTY	5 Years	5 Years	5 Years



EW48302-BK & EB48328-BK



WILSHIRE.

EW36804 / EW36805

A sharply defined light pattern and crisp geometric edges are emblematic of the rectilinear Wilshire series. Dual beams of illumination are projected from the open sides of the wall-mounted die-cast housing. The quintessential form and quality of construction allow the exterior rated fixture to additionally perform as fine interior accent. Available in multiple sizes and Black powder-coated finish.

● BK—Black | Custom Options Available



EW36804-BK



EW36805-BK

SPECIFICATIONS DETAILS

+ For custom options, consult factory for details.

	EW36804	EW36805
FIXTURE DIMENSIONS	W4-5/8" x H4-5/8" x E4-3/8"	W5-5/8" x H5-5/8" x E4-7/8"
CANOPY DIMENSIONS	W4-5/8" x H4-5/8" x E5/8"	W5-3/4" x H4-5/8" x E1/2"
LAMP TYPE	LED Board	LED Board
WATTAGE	9W	10W
TOTAL LUMENS	945lm	1050lm
DELIVERED LUMENS	407lm	490lm
COLOR TEMPERATURE	3000K	3000K
CRI (RA)	>80	>80
OPTIONAL COLOR TEMPS	2700K – 5000K Available, MOQ May Apply	2700K – 5000K Available, MOQ May Apply
LED RATED LIFE	50,000 hours	50,000 hours
DIMMABLE	No	No
DIFFUSER DETAILS	Clear PC	Clear PC
VOLTAGE	120-277V	120-277V
WARRANTY	5 Years	5 Years

EW36805-BK

RUNYON.

EW67204 / EW67206

Housed within the austere form of the die-cast cylindrical wall mount are dual light emitting precision optics. Inset from both flat surfaces of the tubular enclosure are a combination of narrow beam reflector and tempered glass cover, projecting a column of LED illumination upwards and downwards. Available in two sizes, down only or up-down configurations and Black powder-coated finish.

● BK—Black | Custom Options Available



EW67204-BK



EW67206-BK

SPECIFICATIONS DETAILS

+ For custom options, consult factory for details.

	EW67204	EW67206
FIXTURE DIMENSIONS	W3-1/4" x H3-1/2" x E4-3/4"	W3-1/4" x H5-1/2" x E4-3/4"
CANOPY DIMENSIONS	W4-5/8" x H4-5/8" x E5/8"	W4-5/8" x H4-5/8" x E5/8"
LAMP TYPE	LED Board	LED Board
WATTAGE	6W	9W
TOTAL LUMENS	630lm	950lm
DELIVERED LUMENS	201lm	444lm
COLOR TEMPERATURE	3000K	3000K
CRI (RA)	>80	>80
OPTIONAL COLOR TEMPS	2700K – 5000K Available, MOQ May Apply	2700K – 5000K Available, MOQ May Apply
LED RATED LIFE	50,000 hours	50,000 hours
DIMMABLE	No	No
DIFFUSER DETAILS	Clear Glass + Parabolic Aluminum Reflector	Clear Glass + Parabolic Aluminum Reflector
LIGHT SOURCE	LED with DC Driver	LED with DC Driver
VOLTAGE	120-277V	120-277V
WARRANTY	5 Years	5 Years



SIGNAL.

EW64906

Utilizing a ubiquitous cylindrical shape the Signal exterior fixture features an innovative shift in materiality. A die-cast opal tube radiates ambient light from the fixture body while symmetrical translucent diffusers distribute illumination up and down. Slightly offset from the mounting surface an illusory effect is created of a floating column of luminance.

● BK—Black | Custom Options Available

EW64906-BK



EW64906

SPECIFICATIONS DETAILS

+ For custom options, consult factory for details.

EW64906	
FIXTURE DIMENSIONS	W5-5/8" x H6" x E7-1/2"
LAMP TYPE	LED Board
WATTAGE	10W
TOTAL LUMENS	1050lm
DELIVERED LUMENS	480lm
COLOR TEMPERATURE	3000K
CRI (RA)	>80
OPTIONAL COLOR TEMPS	2700K – 5000K Available, MOQ May Apply
LED RATED LIFE	50,000 hours
DIMMABLE	Yes
DIMMING PERCENTAGE	100% – 10%
DIFFUSER DETAILS	White PC Diffuser
LIGHT SOURCE	AC LED Module
VOLTAGE	120V
WARRANTY	5 Years

COLUMBIA.

ES49604

Appearing as a floating disc offset from the surface plane, the circular Columbia wall mount directs light outwards in a focused radial spread. Intended for installation in the centre of a cavity or recess, the exterior-rated lamp illuminates the architectural border creating an ambient perimeter of radiance. The die-cast aluminum assembly is powder-coated and available in Black finish.

- BK—Black | Custom Options Available



ES49604-BK

SPECIFICATIONS DETAILS

+ For custom options, consult factory for details.

	ES49604
FIXTURE DIMENSIONS	D4-3/8" x H2-3/4"
LAMP TYPE	LED Board
WATTAGE	8W
TOTAL LUMENS	840lm
DELIVERED LUMENS	285lm
COLOR TEMPERATURE	3000K
CRI (RA)	>80
OPTIONAL COLOR TEMPS	2700K – 5000K Available, MOQ May Apply
LED RATED LIFE	50,000 hours
DIMMABLE	No
DIFFUSER DETAILS	Clear PC Optics
LIGHT SOURCE	LED with DC Driver
VOLTAGE	120-277V
WARRANTY	5 Years

ES49604-BK

FAIRFAX.

EW36403 / EW36406

Concealed behind the glowing orthogonal façade of the Fairfax wall mount are variable spread light sources. Hidden within the die-cast planar surround are adjustable shutters that allow for active beam angle modification.

Reductive in shape yet resolved in detail, the fixture functions well in repetition or clustered configurations. Available in two sizes and Black finish.

● BK—Black | Custom Options Available



EW36403




EW36406

SPECIFICATIONS DETAILS

+ For custom options, consult factory for details.

	EW36403	EW36406
FIXTURE DIMENSIONS	W3-1/4" x H6-7/8" x E5-5/8"	W5-5/8" x H5-3/4" x E5-5/8"
CANOPY DIMENSIONS	W3-1/8" x H5-5/8" x E5/8"	W5" x H4-7/8" x E5/8"
LAMP TYPE	LED Board	LED Board
WATTAGE	12W	12W
TOTAL LUMENS	1260lm	1260lm
DELIVERED LUMENS	453lm	465lm*
COLOR TEMPERATURE	3000K	3000K
CRI (RA)	>80	>80
OPTIONAL COLOR TEMPS	2700K – 5000K Available, MOQ May Apply	2700K – 5000K Available, MOQ May Apply
LED RATED LIFE	50,000 hours	50,000 hours
DIMMABLE	No	No
DIFFUSER DETAILS	PC Diffuser	PC Diffuser
LIGHT SOURCE	LED with DC Driver	LED with DC Driver
VOLTAGE	120-277V	120-277V
WARRANTY	5 Years	5 Years

EW36403-BK

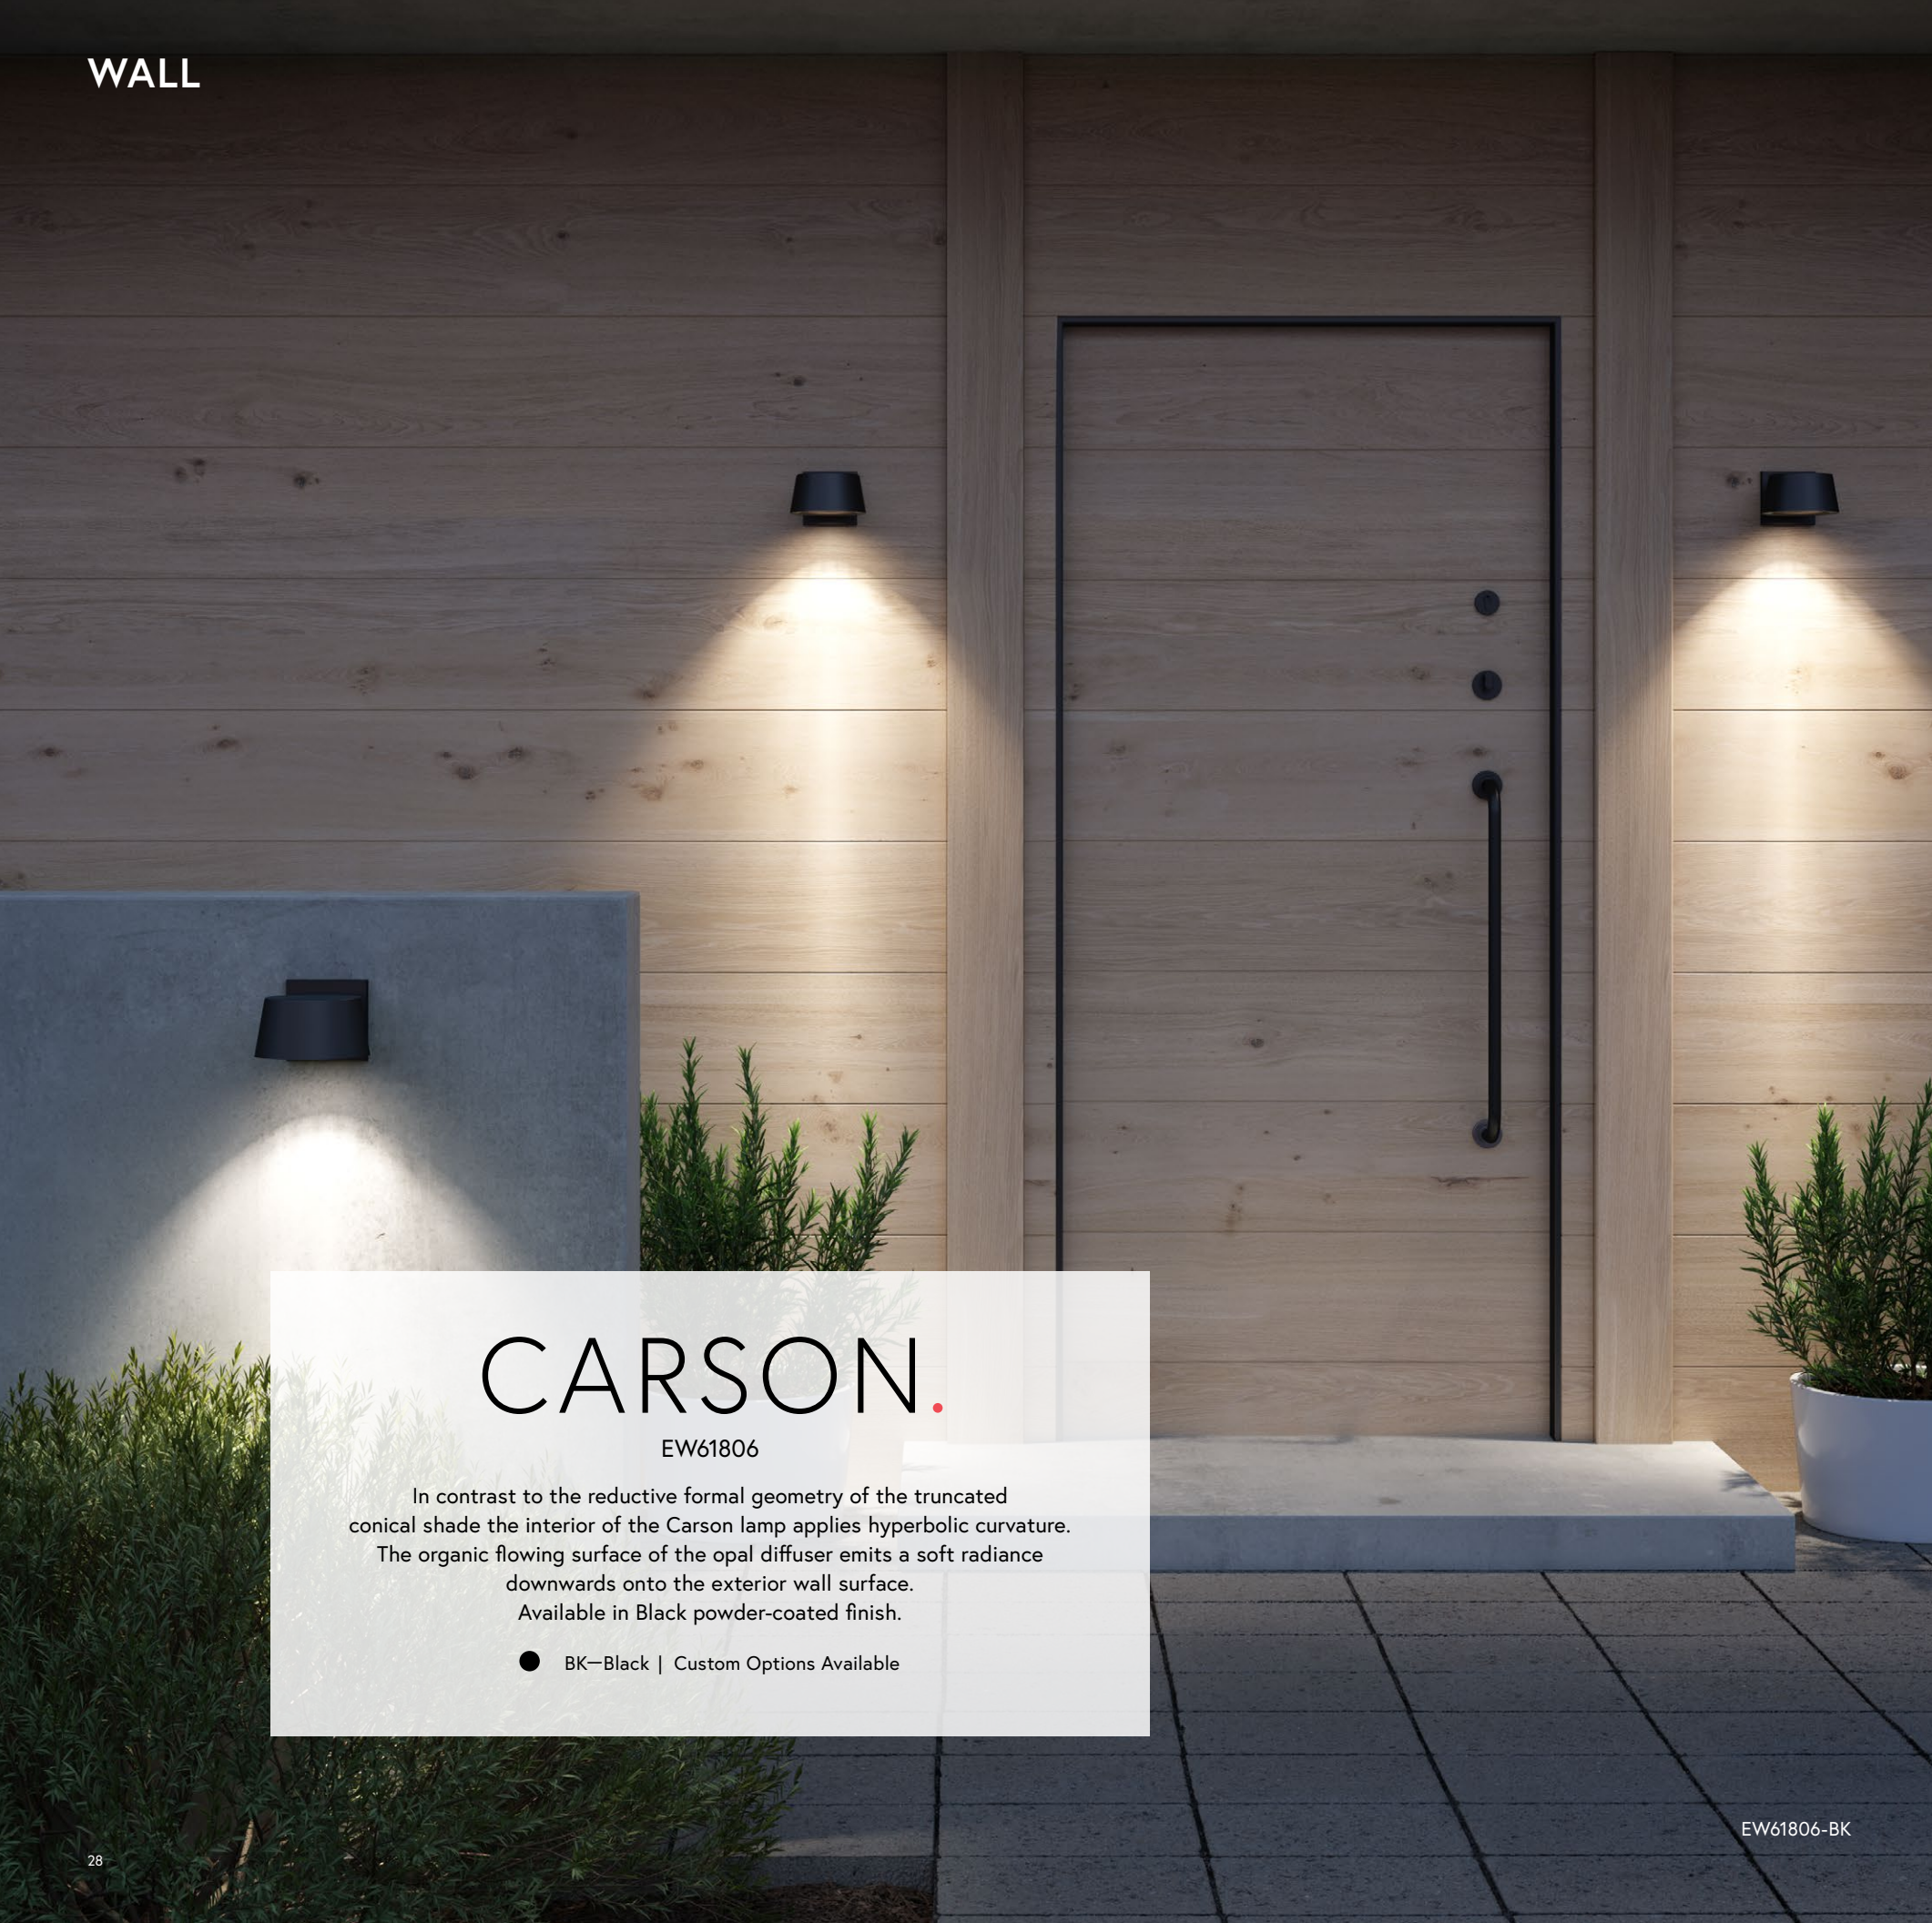

CARSON.

EW61806

In contrast to the reductive formal geometry of the truncated conical shade the interior of the Carson lamp applies hyperbolic curvature. The organic flowing surface of the opal diffuser emits a soft radiance downwards onto the exterior wall surface. Available in Black powder-coated finish.

● BK—Black | Custom Options Available

EW61806-BK



SPECIFICATIONS DETAILS

+ For custom options, consult factory for details.

	EW61806
FIXTURE DIMENSIONS	W6-3/8" x H3-1/4" x E7-7/8"
CANOPY DIMENSIONS	W4-5/8" x H4-5/8" x E1/2"
LAMP TYPE	LED Board
WATTAGE	11W
TOTAL LUMENS	1155lm
DELIVERED LUMENS	741lm
COLOR TEMPERATURE	3000K
CRI (RA)	>80
OPTIONAL COLOR TEMPS	2700K – 5000K Available, MOQ May Apply
LED RATED LIFE	50,000 hours
DIMMABLE	No
DIFFUSER DETAILS	Clear PC
LIGHT SOURCE	LED with DC Driver
VOLTAGE	120-277V
WARRANTY	5 Years

EW61806-BK

HAWTHORNE.

EW36203 / EW36206

A minimal orthogonal wall mount, the Hawthorne exterior lamp produces dual light spreads emitting from the open ends of the box form. Hidden within the die-cast planar surround are adjustable shutters that allow for active beam angle modification. Reductive in shape yet resolved in detail, the fixture functions well in repetition or clustered configurations. Available in two sizes and Black finish.

● BK—Black | Custom Options Available



EW36206-BK



EW36203-BK



EW36206-BK

SPECIFICATIONS DETAILS

+ For custom options, consult factory for details.

	EW36203	EW36206
FIXTURE DIMENSIONS	W3-1/8" x H6-7/8" x E4-7/8"	W5-3/4" x H5-5/8" x E4-3/4"
CANOPY DIMENSIONS	W3-1/8" x H5-5/8" x E1/2"	W5-3/4" x H4-5/8" x E1/2"
LAMP TYPE	LED Board	LED Board
WATTAGE	6W	6W
TOTAL LUMENS	630lm	630lm
DELIVERED LUMENS	264lm	265lm
COLOR TEMPERATURE	3000K	3000K
CRI (RA)	>80	>80
OPTIONAL COLOR TEMPS	2700K – 5000K Available, MOQ May Apply	2700K – 5000K Available, MOQ May Apply
LED RATED LIFE	50,000 hours	50,000 hours
DIMMABLE	No	No
DIFFUSER DETAILS	Clear Glass	Clear Glass
LIGHT SOURCE	LED with DC Driver	LED with DC Driver
VOLTAGE	120-277V	120V-277V
WARRANTY	5 Years	5 Years

VORTEX.

EW64708

A brilliant loop of illumination emanates outwards from the central circular void in the Vortex exterior wall lamp. Utilizing a circumferential opal diffuser the LED array is uniformly softened, providing a pleasant ambient radiance. Contemporary in appearance the airy design creates maximum impact in a minimal form. Available in Black powder-coated finish.

● BK—Black | Custom Options Available



EW64708-BK

SPECIFICATIONS DETAILS

+ For custom options, consult factory for details.

EW64708	
FIXTURE DIMENSIONS	W7-7/8" x H2-1/4" x E8-7/8"
CANOPY DIMENSIONS	W4-5/8" x H4-5/8" x E5/8"
LAMP TYPE	LED Board
WATTAGE	4W
TOTAL LUMENS	420lm
DELIVERED LUMENS	224lm
COLOR TEMPERATURE	3000K
CRI (RA)	>80
OPTIONAL COLOR TEMPS	2700K – 5000K Available, MOQ May Apply
LED RATED LIFE	50,000 hours
DIMMABLE	No
DIFFUSER DETAILS	Clear PC Diffuser
LIGHT SOURCE	LED with DC Driver
VOLTAGE	120-277V
WARRANTY	5 Years

EW64708-BK



STATO.

EW33104 / EW33204

A die-cast aluminum cube projects a defined spread of brilliance outwards from the dual parabolic reflectors. Crisp edges of the illumination allow for the Stato exterior wall fixture to be used in tandem by creating focal undulating patterns. In a stand-alone application, the reductive orthogonal design and detailed finishing combine for an understated modern appearance.

Available in multiple powder-coated finishes.

● BK—Black ● GH—Graphite ○ WH—White

Custom Options Available


EW33204-WH



EW33104-BK



EW33104-GH

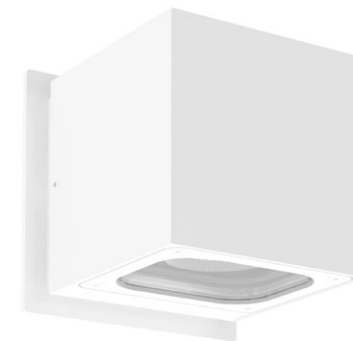

EW33204-WH



EW33204-BK

SPECIFICATIONS DETAILS

+ For custom options, consult factory for details.

	EW33104	EW33204
FIXTURE DIMENSIONS	W4" x H4" E4-1/2"	W4" x H4" E4-1/2"
CANOPY DIMENSIONS	W4-5/8" x H4-5/8" x E1/8"	W4-5/8" x H4-5/8" x E1/8"
LAMP TYPE	LED Board	LED Board
WATTAGE	8W	15W
TOTAL LUMENS	840lm	1575lm
DELIVERED LUMENS	420lm	840lm
COLOR TEMPERATURE	3000K	3000K
CRI (RA)	>80	>80
OPTIONAL COLOR TEMPS	2700K – 5000K Available, MOQ May Apply	2700K – 5000K Available, MOQ May Apply
LED RATED LIFE	50,000 hours	50,000 hours
DIMMABLE	No	No
DIFFUSER DETAILS	Clear Glass + Parabolic Aluminum Reflector	Clear Glass + Parabolic Aluminum Reflector
LIGHT SOURCE	LED with DC Driver	LED with DC Driver
VOLTAGE	120-277V	120-277V
WARRANTY	5 Years	5 Years



VARO.

EW64508

Encapsulated within a transparent polycarbonate tube a concentric pillar of light radiates diffusive illumination outwards. Completing the cylindrical shape are a pair of cast-aluminum caps with the lower connected to the matching circular wall mount. Rated for exterior usage, the distinctive Varo lamp pairs elegant optical assembly with formal simplicity. Available in black powder-coated finishes.

● BK—Black | Custom Options Available



EW64508-BK

SPECIFICATIONS DETAILS

+ For custom options, consult factory for details.

	EW64508
FIXTURE DIMENSIONS	W3-1/4" x H8" x E4-1/4"
CANOPY DIMENSIONS	D4-3/4" x E5/8"
LAMP TYPE	LED Board
WATTAGE	8W
TOTAL LUMENS	840lm
DELIVERED LUMENS	338lm
COLOR TEMPERATURE	3000K
CRI (RA)	>80
OPTIONAL COLOR TEMPS	2700K – 5000K Available, MOQ May Apply
LED RATED LIFE	50,000 hours
DIMMABLE	Yes
DIMMING PERCENTAGE	100% – 10%
DIFFUSER DETAILS	Clear PC
LIGHT SOURCE	AC LED Module
VOLTAGE	120V
WARRANTY	5 Years

EW64508-BK

LATIMER.

EW67612

Latimer cohesively bridges divergent accent lighting. Inset from both concave surfaces of the tubular enclosure are a combination of narrow beam reflector and tempered glass cover, projecting a column of LED illumination upwards and downwards. Available in Black powder-coated finish.

● BK—Black | Custom Options Available

EW67612-BK



EW67612-BK

SPECIFICATIONS DETAILS

+ For custom options, consult factory for details.

	EW67612
FIXTURE DIMENSIONS	W5-5/8" x H11-7/8" x E7-1/2"
CANOPY DIMENSIONS	W4-5/8" x H5-3/4" x E1/2"
LAMP TYPE	LED Board
WATTAGE	40W
TOTAL LUMENS	4200lm
DELIVERED LUMENS	2470lm*
COLOR TEMPERATURE	3000K
CRI (RA)	>80
OPTIONAL COLOR TEMPS	2700K – 5000K Available, MOQ May Apply
LED RATED LIFE	50,000 hours
DIMMABLE	Yes
DIMMING PERCENTAGE	100% – 10%
DIFFUSER DETAILS	Clear Glass + Parabolic Aluminum Reflector
LIGHT SOURCE	AC LED Module
VOLTAGE	120V
WARRANTY	5 Years



MELROSE.

EW37507

The deceptive simplicity of the Melrose rectilinear wall mount conceals an innovative feature: variable apertures to control and customize the distributed light spread. Integrated within the surface of the cast-aluminum housing are sets of easily adjusted sliding shutters to cover the clear glass diffusers. When applied in multiples, a plethora of elegant patterns may be achieved. Available in Black powder-coated finish and configurations.

● BK—Black | Custom Options Available

EW37507-BK



EW37507-BK

SPECIFICATIONS DETAILS

+ For custom options, consult factory for details.

EW37507	
FIXTURE DIMENSIONS	W7-1/4" x H4-5/8" x E2-1/4"
CANOPY DIMENSIONS	W5-3/4" x H4-5/8" x E1/2"
LAMP TYPE	LED Board
WATTAGE	12W
TOTAL LUMENS	1260lm
DELIVERED LUMENS	489lm
COLOR TEMPERATURE	3000K
CRI (RA)	>80
OPTIONAL COLOR TEMPS	2700K – 5000K Available, MOQ May Apply
LED RATED LIFE	50,000 hours
DIMMABLE	No
DIFFUSER DETAILS	Clear PC
LIGHT SOURCE	LED with DC Driver
VOLTAGE	120-277V
WARRANTY	5 Years

CANYON.

EW38807

The deceptive simplicity of the Canyon rectilinear wall mount conceals an innovative feature-variable apertures to control and customize the distributed light spread. Integrated within the surface of the cast-aluminum housing are sets of easily adjusted sliding shutters to cover the clear glass diffusers.

When applied in multiples, a plethora of elegant patterns may be achieved.

Available in Black powder-coated finish and multiple configurations.

● BK—Black | Custom Options Available



EW38807-BK

SPECIFICATIONS DETAILS

+ For custom options, consult factory for details.

	EW38807
FIXTURE DIMENSIONS	W6-3/4" x H6-3/4" x E2-3/8"
LAMP TYPE	LED Board
WATTAGE	12W
TOTAL LUMENS	1260lm
DELIVERED LUMENS	515lm
COLOR TEMPERATURE	3000K
CRI (RA)	>80
OPTIONAL COLOR TEMPS	2700K – 5000K Available, MOQ May Apply
LED RATED LIFE	50,000 hours
DIMMABLE	No
DIFFUSER DETAILS	Clear PC
LIGHT SOURCE	LED with DC Driver
VOLTAGE	120-277V
WARRANTY	5 Years

EW38807-BK



SUNSET.

EC35204 / EC35205 / EW35204 / EW35205 / EW35404 / EW35405

With a simple rectilinear silhouette and distinguished glass detail the adaptive Sunset series exceeds in a variety of surface-mount applications. Protruding outwards from the extruded square envelop, a substantial crystal optic produces a soft diffuse light from the opal interior. Contrasting the illuminated translucent volume the lens thickness reveals an outer treatment of clear glossy, borosilicate glass. Available in multiple sizes and configurations.

● BK—Black | Custom Options Available

EC35205-BK



EC35204-BK



EC35205-BK

SPECIFICATIONS DETAILS

+ For custom options, consult factory for details.

	EC35204	EC35205
FIXTURE DIMENSIONS	L3-7/8" x W3-7/8" x H4-7/8"	L4-3/4" x W4-3/4" x H5-1/4"
CANOPY DIMENSIONS	L4-5/8" x W4-5/8" x H1/8"	-
LAMP TYPE	LED Board	LED Board
WATTAGE	6W	11W
TOTAL LUMENS	630lm	1155lm
DELIVERED LUMENS	121lm	267lm
COLOR TEMPERATURE	3000K	3000K
CRI (RA)	>80	>80
OPTIONAL COLOR TEMPS	2700K – 5000K Available, MOQ May Apply	2700K – 5000K Available, MOQ May Apply
LED RATED LIFE	50,000 hours	50,000 hours
DIMMABLE	No	No
DIFFUSER DETAILS	White Interior Coating	White Interior Coating
LIGHT SOURCE	LED with DC Driver	LED with DC Driver
VOLTAGE	120-277V	120-277V
WARRANTY	5 Years	5 Years



EW35204-BK



EW35205-BK



EW35404-BK



EW35405-BK

SPECIFICATIONS DETAILS

+ For custom options, consult factory for details.

	EW35204	EW35205
FIXTURE DIMENSIONS	W3-7/8" x H4-3/8" E4-1/2"	W4-3/4" x H5-1/4" x E4-3/4"
CANOPY DIMENSIONS	W4-5/8" x H4-5/8" x E1/8"	-
LAMP TYPE	LED Board	LED Board
WATTAGE	6W	11W
TOTAL LUMENS	630lm	1155lm
DELIVERED LUMENS	121lm	267lm
COLOR TEMPERATURE	3000K	3000K
CRI (RA)	>80	>80
OPTIONAL COLOR TEMPS	2700K – 5000K Available, MOQ May Apply	2700K – 5000K Available, MOQ May Apply
LED RATED LIFE	50,000 hours	50,000 hours
DIMMABLE	No	No
DIFFUSER DETAILS	White Interior Coating	White Interior Coating
LIGHT SOURCE	LED with DC Driver	LED with DC Driver
VOLTAGE	120-277V	120-277V
WARRANTY	5 Years	5 Years

SPECIFICATIONS DETAILS

+ For custom options, consult factory for details.

	EW35404	EW35405
FIXTURE DIMENSIONS	W3-7/8" x H4-7/8" x E4-1/2"	W4-3/4" x H5-3/4" x E4-3/4"
CANOPY DIMENSIONS	W4-5/8" x H4-5/8" x E1/8"	-
LAMP TYPE	LED Board	LED Board
WATTAGE	11W	20W
TOTAL LUMENS	1155lm	2100lm
DELIVERED LUMENS	242lm	535lm
COLOR TEMPERATURE	3000K	3000K
CRI (RA)	>80	>80
OPTIONAL COLOR TEMPS	2700K – 5000K Available, MOQ May Apply	2700K – 5000K Available, MOQ May Apply
LED RATED LIFE	50,000 hours	50,000 hours
DIMMABLE	No	No
DIFFUSER DETAILS	White Interior Coating	White Interior Coating
LIGHT SOURCE	LED with DC Driver	LED with DC Driver
VOLTAGE	120-277V	120-277V
WARRANTY	5 Years	5 Years




DAKOTA.

EC34111 / EC34113

A square opal optic is inset from the precision cast-aluminum body of the Dakota that contains and diffuses the LED light array. The recess along the border of the illuminated protrusion creates a continuous highlight on the nearby perimeter edges. Further considered details are apparent with a subtle gap between the fixture and mounting surface producing a shadow line while obscuring the attachment hardware. Available in two sizes and Black powder-coated finish.

● BK—Black | Custom Options Available

EC34113-BK

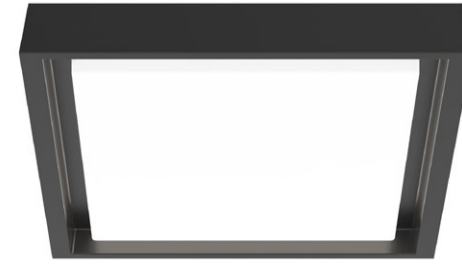

EC34111-BK



EC34113-BK

SPECIFICATIONS DETAILS

+ For custom options, consult factory for details.

	EC34111	EC34113
FIXTURE DIMENSIONS	L10-3/4" x W10-3/4" x H2-1/8"	L13-3/8" x W13-3/8" x H2-1/8"
LAMP TYPE	LED Board	LED Board
WATTAGE	25W	25W
TOTAL LUMENS	2625lm	2625lm
DELIVERED LUMENS	2490lm	2545lm
COLOR TEMPERATURE	3000K	3000K
CRI (RA)	>80	>80
OPTIONAL COLOR TEMPS	2700K – 5000K Available, MOQ May Apply	2700K – 5000K Available, MOQ May Apply
LED RATED LIFE	50,000 hours	50,000 hours
DIMMABLE	No	No
DIFFUSER DETAILS	White PC Diffuser	White PC Diffuser
LIGHT SOURCE	LED with DC Driver	LED with DC Driver
VOLTAGE	120-277V	120-277V
WARRANTY	5 Years	5 Years



ELLE.

EC44111 / EC44113

A circular opal optic is inset from the precision cast aluminum body of the Elle that contains and diffuses the LED light array. The recess along the circumference of the illuminated protrusion creates a continuous highlight on the nearby perimeter edge. Further considered details are apparent with a subtle gap between the fixture and mounting surface producing a shadow line while obscuring the attachment hardware. Available in two sizes and multiple finishes.

● BK—Black | Custom Options Available

EC44113-BK



EC44111-BK



EC44113-BK

SPECIFICATIONS DETAILS

+ For custom options, consult factory for details.


	EC44111	EC44113
FIXTURE DIMENSIONS	D10-3/4" x H2-1/8"	D13-3/8" x H2-1/8"
LAMP TYPE	LED Board	LED Board
WATTAGE	25W	25W
TOTAL LUMENS	2625lm	2625lm
DELIVERED LUMENS	2547lm	2673lm
COLOR TEMPERATURE	3000K	3000K
CRI (RA)	>80	>80
OPTIONAL COLOR TEMPS	2700K – 5000K Available, MOQ May Apply	2700K – 5000K Available, MOQ May Apply
LED RATED LIFE	50,000 hours	50,000 hours
DIMMABLE	No	No
DIFFUSER DETAILS	White PC Diffuser	White PC Diffuser
LIGHT SOURCE	LED with DC Driver	LED with DC Driver
VOLTAGE	120-277V	120-277V
WARRANTY	5 Years	5 Years

MORaine.

EC43711

With a slim profile and exacting detail of construction the Moraine circular exterior lamp provides an ideal contemporary surface mounted fixture. The fine edge thickness of the die-cast aluminum housing wraps the polycarbonate diffuser culminating in a uniformly flush facade. Illumination follows the diameter of the fixture resulting in a planar halo of downwards radiance. Available in Black powder-coated finish.

● BK—Black | Custom Options Available

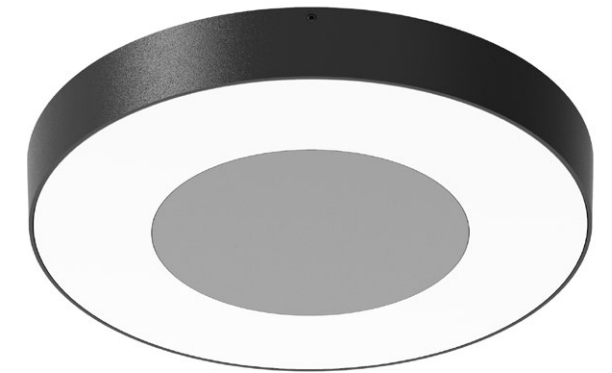

EC43711-BK

SPECIFICATIONS DETAILS

+ For custom options, consult factory for details.

	EC43711
FIXTURE DIMENSIONS	D10-3/4" x H1-1/2"
LAMP TYPE	LED Board
WATTAGE	25W
TOTAL LUMENS	2625lm
DELIVERED LUMENS	1290lm
COLOR TEMPERATURE	3000K
CRI (RA)	>80
OPTIONAL COLOR TEMPS	2700K – 5000K Available, MOQ May Apply
LED RATED LIFE	50,000 hours
DIMMABLE	No
DIFFUSER DETAILS	White PC Diffuser
LIGHT SOURCE	LED with DC Driver
VOLTAGE	120-277V
WARRANTY	5 Years

EC43711-BK

KUZCO

3110 LOS FELIZ BLVD.
LOS ANGELES, CA 90039
UNITED STATE

WWW.KUZCOLIGHTING.COM
TOLL FREE: +1.855.955.8926