

PANDORA WS25350

WALL

PROJECT

DESCRIPTION

Dual square profile linear aluminum arms with rectangular wall mount. Inset opal polymeric diffusers. Finely textured plate or powder-coated finish. Wall emitting lights with rotational adjustment.



WS25350-BN
Brushed Nickel



WS25350-BK
Black



WS25350-WH
White




WS25350-GD
Gold

SPECIFICATION DETAILS

* For custom options, consult factory for details.

Fixture Dimensions	W50" x H4-5/8" x E3-7/8"
Light Source	LED with DC Driver
Wattage	44W
Total Lumens	2980lm
Delivered Lumens	BK-1585lm; BN-1410lm*; GD-1160lm*; WH-2187lm;
Voltage	120V
Color Temperature	3000K
CRI (Ra)	90CRI
Optional Color Temps	2700K - 5000K Available, Minimum Order Quantities Apply
LED Rated Life	50,000 hours
Dimming	100% - 10%, TRIAC or ELV Dimmer (Not Included)
Diffuser Details	White Acrylic Diffuser
ADA Compliant	Yes
Location	Dry
Compliance	ADA
Warranty	5 Years
Illumination Direction	Fontlight Illumination
Mounting Style	All Orientation; Wall;
Canopy Dimensions	W3" x H5-1/8" x E1-5/8"

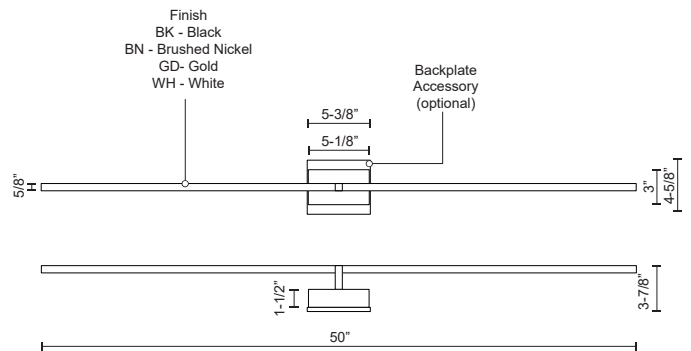

KUZCO

19054 28TH AVENUE
SURREY - BC V3Z 6M3
CANADA

WWW.KUZCOLIGHTING.COM

COMMENT