

BEVERAGE REFRIGERATOR

L3024UI1BSG - 24 Inch Single Zone Undercounter Beverage Refrigerator with 147 Can Capacity



FEATURES:

- **Everglide™ System:** A system of soft closing door hinges and shelves mitigates unwanted vibrations to your refrigerator's contents
- Fully height-adjustable shelves enable a user to move shelves up and down vertical tracking with the option to choose from a wide range of heights, creating more or less space on each shelf
- Best-in-class cabinet lighting runs the entire interior length of three sides with versatile LED color options: Blue, white and amber
- Commercial grade 304 stainless steel interior and exterior cabinet
- Precision cooling to drive air evenly throughout the interior, preventing unwanted hotspots
- Low-E, double-pane glass door with a layer of argon gas to maximize energy efficiency and deter harmful UV rays

ADDITIONAL FEATURES:

- Includes three (3) full extension beverage shelves plus one (1) shallow bottom shelf to fully utilize interior space
- The integrated door lock, along with the door ajar and temperature alarms, provide an extra layer of security
- Vibration-dampening wire shelves with stainless steel decorative fronts are both stylish and functional
- Zero-clearance door hinges allow for a seamless installation with adjacent cabinetry
- Temperature range: 34 - 65°F

WARRANTY:

- Three (3) Years Parts and Labor
 - Six (6) Years Sealed System Parts
- See complete warranty for details




MODEL DETAILS:

Model	Voltage	Door Swing	Finish
L3024UI1BSG-RH	115V	Right Hinge	Stainless Steel
L3024UI1BSG-LH	115V	Left Hinge	Stainless Steel


ACCESSORIES:

Model	Description	Finish
HDLPRO	PRO Style Handle for Undercounter Models	Stainless Steel


FRONT

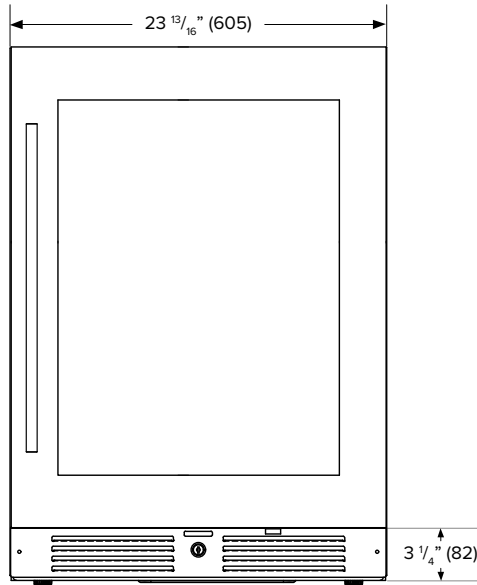

SIDE

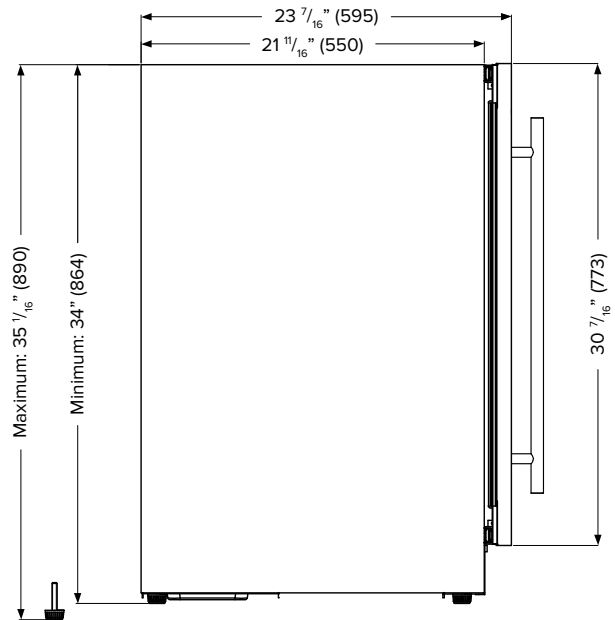

TOP

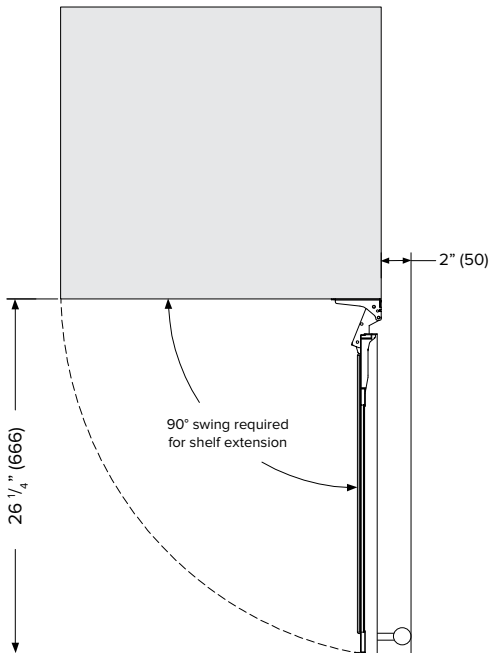

SPECIFICATIONS:

Model #	L3024UI1BSG
Capacity (12 oz. Cans)	147
Capacity (Volume)	5.21 cu ft
Product Depth	23 7/16"
Product Height (Min)	34"
Product Width	23 13/16"
Product Weight	164 lbs.
Refrigerant Type	R600a
Temperature Range	34 - 65°F
Power Cord Length	6.5'
Amps	1.5
Electric Supply	115 VAC, 60 Hz



INSTALLATION NOTES:

- The plug requires an additional 2" for clearance. A recessed receptacle may be required for fully recessed installations
- Dimensions in parentheses are in millimeters

CUTOUT DIMENSIONS

