

Rami Wall (LED)

WS722_LED 1.0



GENERAL PRODUCT INFORMATION:




This product is suitable for damp locations.

This product can mount either to a 4" square electrical box with a round plaster ring or an octagon electrical box.


This product can be dimmed with a low-voltage electronic dimmer.

This instruction shows a typical installation.

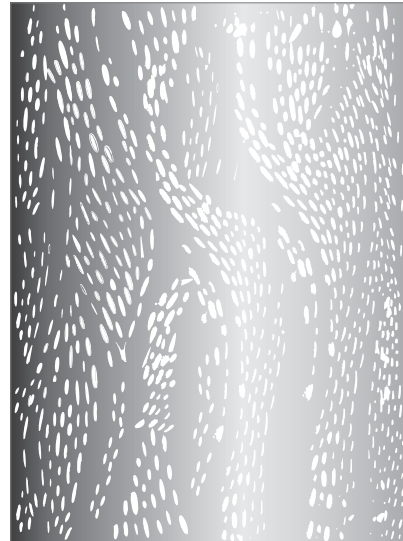


CAUTION - RISK OF FIRE
 This product requires installation by a qualified electrician. Before installing be sure to read all instructions and **TURN THE POWER TO THE ELECTRICAL BOX OFF.**


Install the Fixture

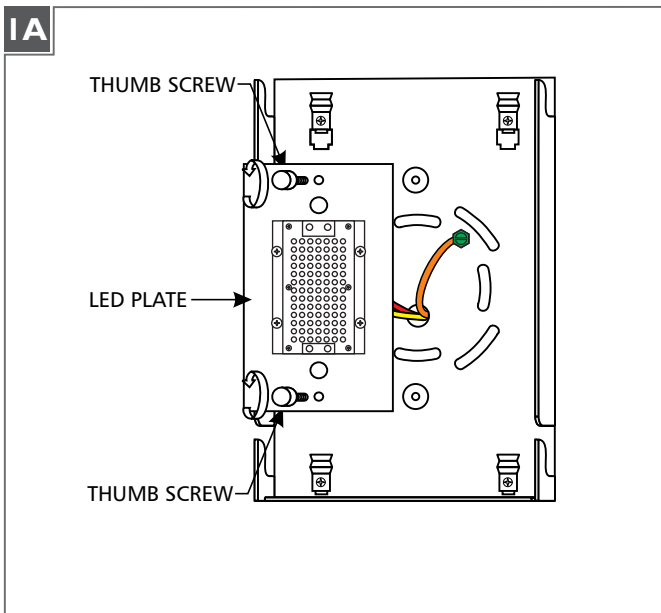


1 To gain access to the mounting plate holes, remove the two thumb screw to temporarily loosen the plate holding the LED lamp.

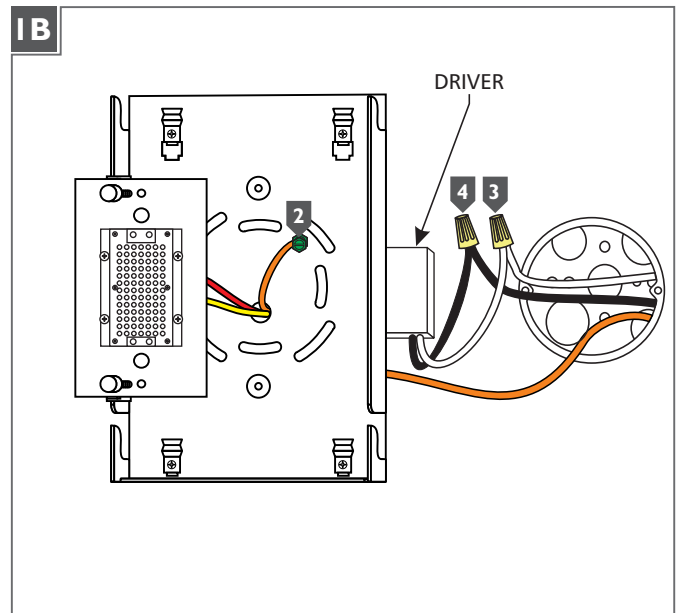

- 2** Connect the fixture to a suitable ground in accordance with local electrical codes.
- 3** Connect the white driver wire to the neutral power line wire with a wire nut.
- 4** Connect the black driver wire to the hot power line wire with a wire nut.

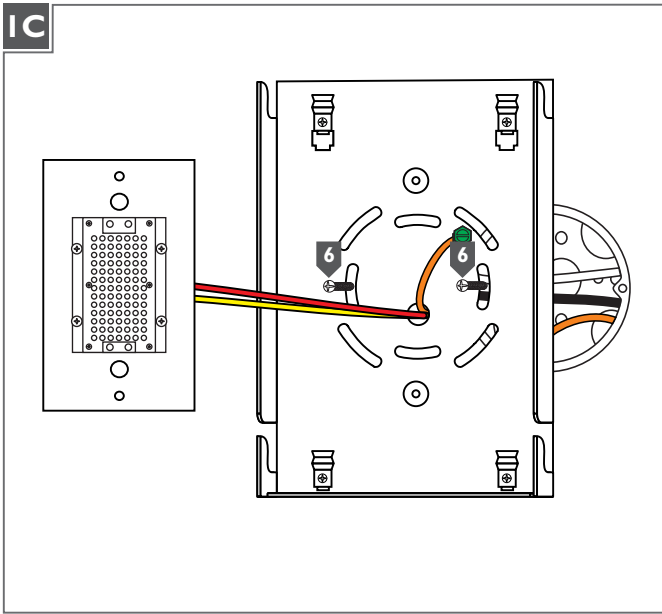


- 5** Properly place all wire, wire nut connections, and the driver inside the electrical box.
- 6** Attach the mounting plate to the electrical box using the two #8-32 screws provided.

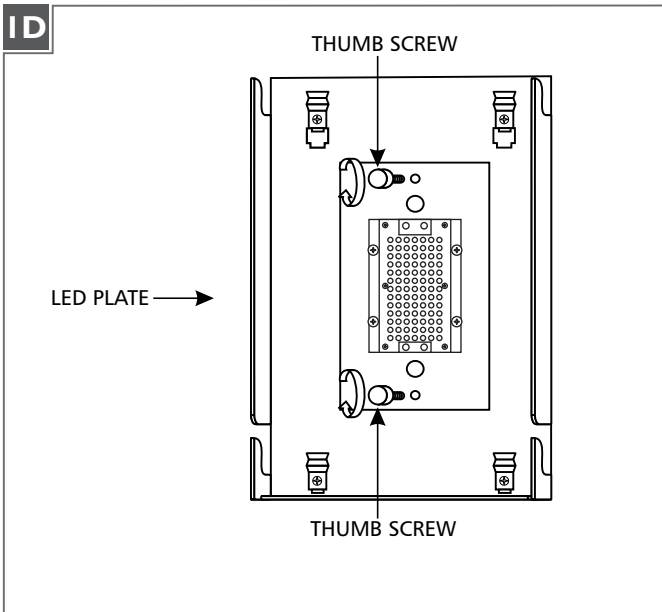

- 7** Re-install the LED Plate and secure it tightly with the two thumb screws.

Install the Shade

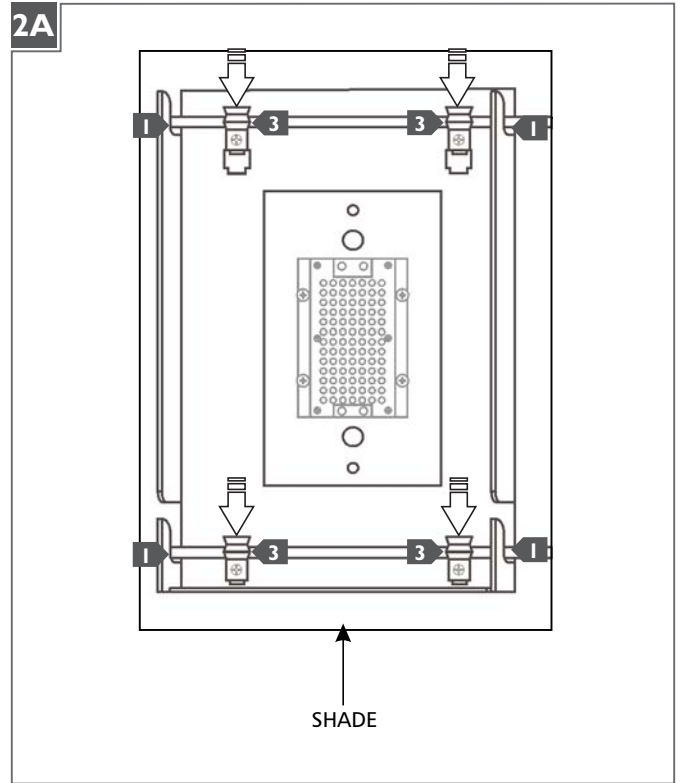

- 1** Slide the shade into the slots on the backplate.
- 2** Align and center the shade to the mounting clips on the mounting plate.
- 3** Mount the shade by evenly pushing down on the shade's frame until they are firmly inside the mounting clips.

SAVE THESE INSTRUCTIONS!

LBL

7400 Linder Ave, Skokie, IL 60077
800.323.3226 - 847.626.6300

www.lblighting.com

© 2013 LBL Lighting. All rights reserved. The "LBL Lighting" graphic is a registered trademark of LBL Lighting. LBL Lighting reserves the right to change specifications for product improvements without notification.

A Generation Brands Company