




A Family and Employee Owned Company

## Specifications

### GUIDE RAIL SYSTEMS

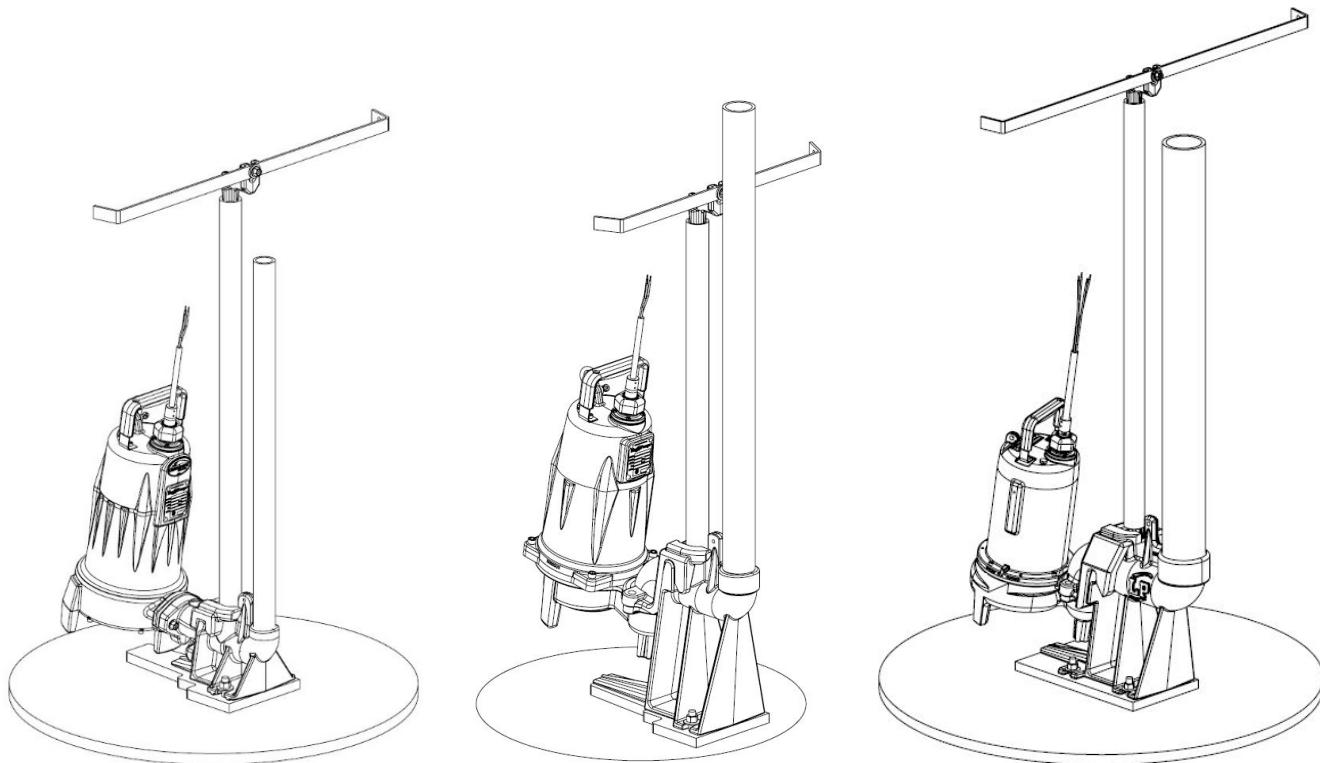

**GR20-Series**  
**1-1/4" Discharge**

**GR22-Series**  
**2" Discharge**

**GR30-Series**  
**3" Discharge**


GR20-Series \_\_\_\_\_ page 2

GR22-Series \_\_\_\_\_ page 5

GR30-Series \_\_\_\_\_ page 10

## GR30-SERIES

### 3" Discharge Guide Rail System

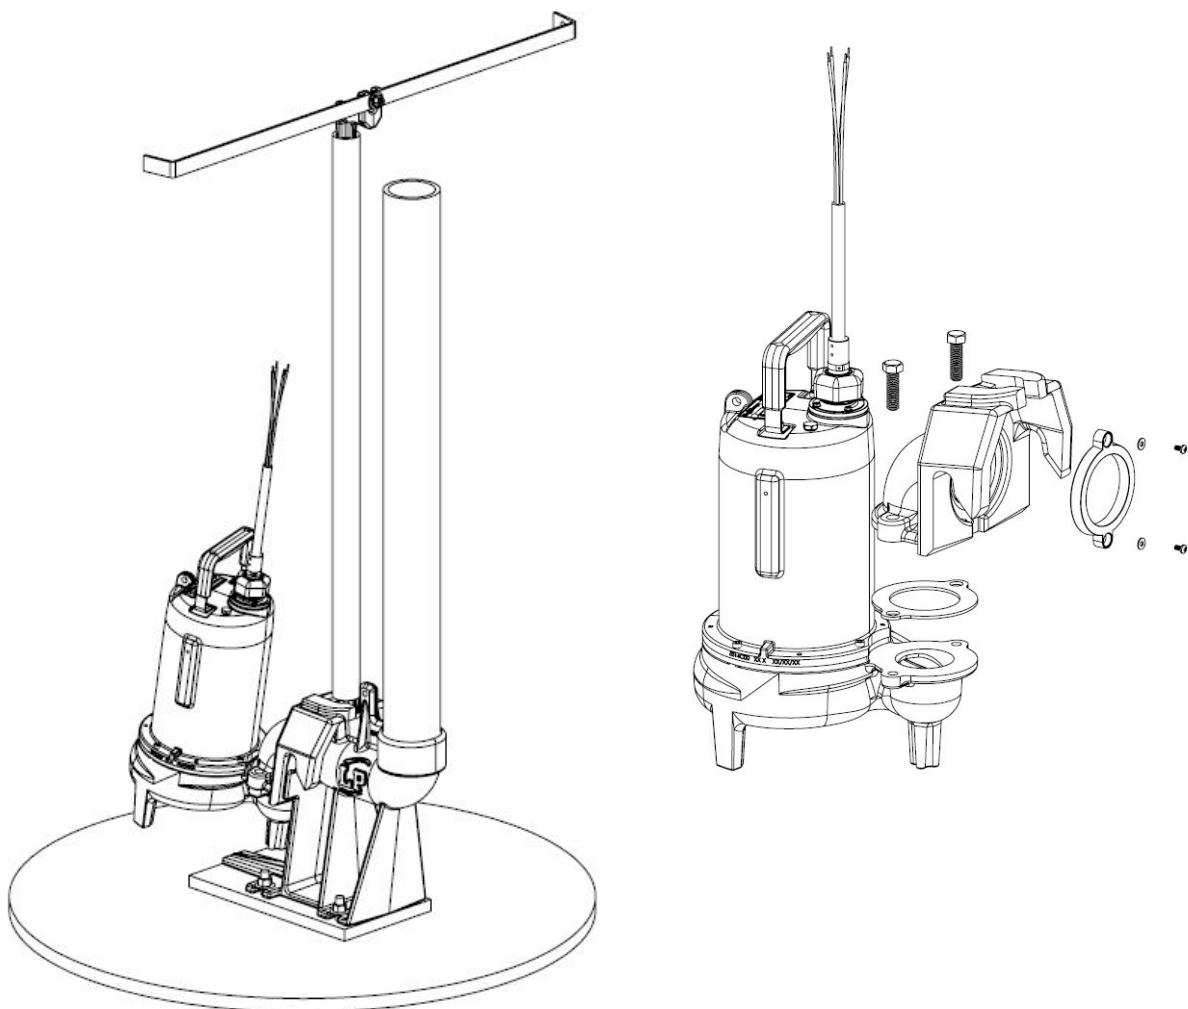

## GR30-Series Technical Data

MODEL	GR30 <i>for standard applications</i>	GR30NS <i>for hazardous locations</i>
GUIDE RAIL BASE	CLASS 25 GRAY CAST IRON	CLASS 25 GRAY CAST IRON
DISCONNECT	CLASS 25 GRAY CAST IRON	BRONZE
GUIDE RAIL	ACCEPTS STANDARD 1¼" NPT PIPE (pipe not included)	ACCEPTS STANDARD 1¼" NPT PIPE (pipe not included)
DISCHARGE PIPE	ACCEPTS STANDARD 3" NPT PIPE (pipe not included)	ACCEPTS STANDARD 3" NPT PIPE (pipe not included)
PAINT	POWDERCOATING	POWDERCOATING (except disconnect)
HARDWARE	STAINLESS STEEL	STAINLESS STEEL
SEALING GROMMET	BUNA N	BUNA N
PUMP INTERFACE	<b>GR30:</b> FITS LE70, LE100, LEH100, LEH150 AND LEH200 SERIES PUMPS, PLUS 3" FEMALE THREADS ALLOW USE WITH OTHER PUMPS	<b>GR30NS:</b> FITS XLE50, XLE70, XLE100, AND XLE150 SERIES PUMPS, PLUS 3" FEMALE THREADS ALLOW USE WITH OTHER PUMPS
MAXIMUM PUMP WEIGHT	250 LBS	250 LBS

## GR30-Series Dimensional Data

