


SC7541IM & SC7520

Freestanding counter-depth

LIEBHERR

Refrigeration and Freezing



home.liebherr.com

SC7541IM & SC7520

Energy consumption

Left appliance: **SC7541IM**

Energy consumption in 365 days kWh 386**

Estimated Yearly Energy Cost in US \$ 54

Right appliance: **SC7520**

Energy consumption in 365 days kWh 295**

Estimated Yearly Energy Cost in US \$ 41

Capacity

Total capacity cu.ft. (l) 25.6 (725)

Refrigerator comp. cu.ft. (l) 15.8 (448)

Freezer Compartment. cu.ft. (l) 9.8 (277)

Sound rating dB(A) 36*

Ice cube output lbs. (kg) / 24h 2.6 (1.2)

Ice cube stock lbs. (kg) 11.9 (5.4)

Door hinges Left / right

Product dimensions

in inch (H / W / D) 63 3/16 | 59 1/14 | 26 5/8

in cm (H / W / D) 168 / 150.5 / 63

Cut out dimensions

in inch (H / W / D) 66 / 60 / 24

in cm (H / W / D) -

Energy supply

Voltage V / Hz 115/60

Net weight lbs. (kg) 414.4 (188)

Ventilation requirements for installation per unit included with cut-out dimension 200cm²/ 31 inc²



Accessories

Side-by-side kit 9905353

Top Ventilation grill for 60" W x 4" H 9903656

Top Ventilation Grill for 60" W x 6.5" h 9904409

FreshAir Charcoal activated filter 9882460

Features

Duo Cooling

Lengthen the shelf life and preserve the flavor of your foods with a dual refrigeration system that creates ideal conditions in both the refrigerator and freezer.

Power Cooling

The fan – as powerful as it is quiet – distributes the cold air efficiently throughout the entire refrigeration compartment.

Super Silent

Noise levels are kept to a minimum thanks to virtually silent, speed-controlled, and sound-absorbing compressors

Smart Steel

SmartSteel finish significantly reduces the visibility of fingerprints, is easy to clean, and is scratch resistant.

Easy Fresh

The guarantee of market freshness in your home. Whether it's unpackaged vegetables or fruit, Easy Fresh ensures that your food is preserved for a longer period of time.

Models can only be installed Side by Side on the original door swing.




* Sound rating dB(A) based on a controlled environment reading.

** Estimated energy costs will depend on utility rates and use. Estimated energy costs are based on a national average electricity cost of 14 cents per KWh.

V.1 (July, 2025)


Diagrams

Product Dimensions

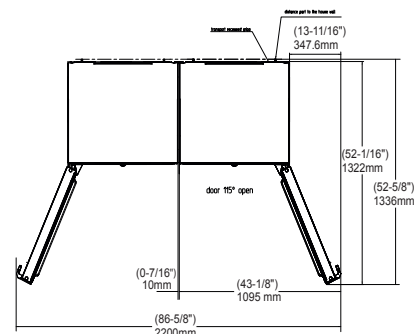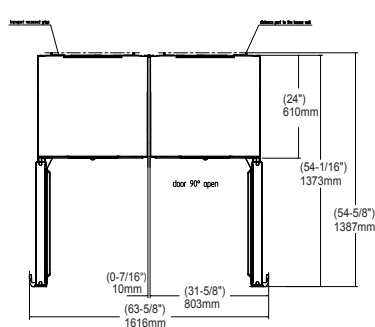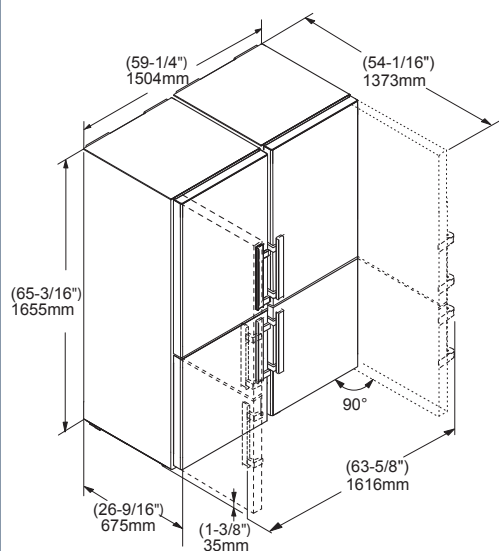

If the appliances are installed with the hinges next to a wall, the distance between the appliance and the wall must be at least 1 1/2" (40 mm). This is how far the handle protrudes when the door is open.

Semi built-in look – Cutout Dimensions

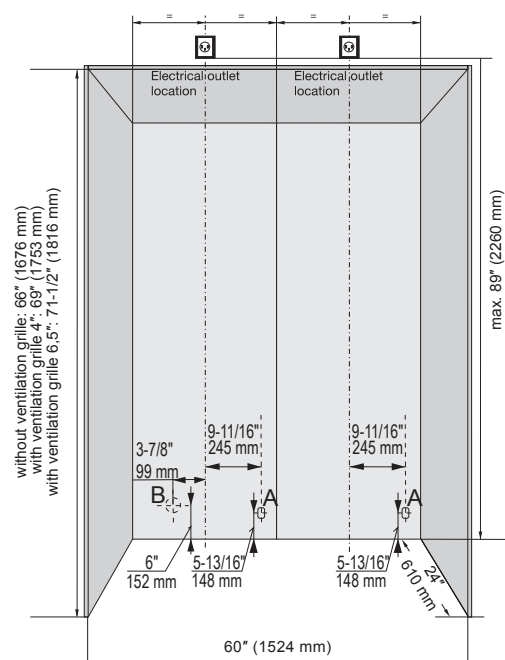


This side by side requires a Side by Side kit to attach both appliances together and provide a finish look.

This side by side combination can be installed in a 69 or 71.5" recess, the remaining gap above the appliances can be covered with a decorative grill 9903 656 or 9904409, adjustable to a width of 60".

The decorative top grille is attached to the cabinets / gables on either side of it and not to the appliance itself nor any cabinet above.

Ventilation Requirements

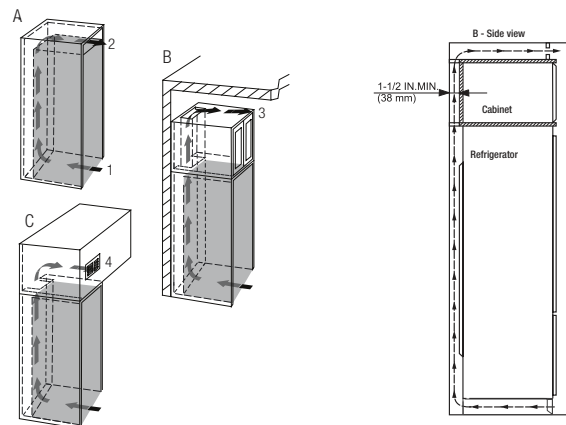

If the appliance is integrated in a fitted kitchen, the following ventilation requirements must be met: - The spacing fins on the back of the appliance are used to ensure sufficient ventilation. These must not lie in cavities or recesses in their final installation position. - Basically, the larger the ventilation gap, the more energy the appliance saves during operation. Do not restrict the air flow.

A cross-sectional air flow of at least 31 in² (200cm²) per appliance at the airflow inlet (1) and at the airflow outlet (2).

The top ventilation space can be directed in one of the following ways:

- A. Directly over the appliance (2) with a gap between the ceiling of the unit and the cabinet
- B. Above the cabinet and below the ceiling (3).
- C. Through a vent installed in a soffit (4).

Be sure to consider the possibility of having to raise some of the leveling legs in order to level the appliance when installing. If you adjust the height of the appliance – it will effectively reduce air flow. Therefore leave yourself some room for adjustment. The appliance is designed to allow proper air flow when installed up against the wall.