# PORT

## GUARD

**DEADBOLT LOCK**

Installation Guide

## WHAT'S INCLUDED

| Bolt and strike | Exterior Assembly | Interior Assembly | Screws |
|---|---|---|---|
| | | | Step 2 |
| | | | Step 3 |
| | | | Step 5 |

⚠️ What you'll need — Phillips head Screwdriver
Note: No drill needed

# PRODUCT OVERVIEW

| FRONT PANEL | BACK PANEL |
|---|---|

Battery cover
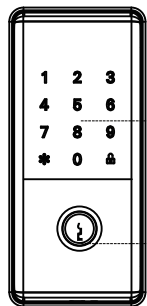
Battery pack

Keypad & Fob Reader

Manual Key

USB port
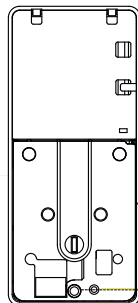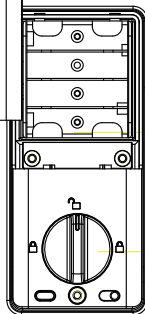
Reset button

# EXPLOSIVE VIEW

Battery cover

Back panel

Mounting plate

Screws

Bolt

Cable

Front panel
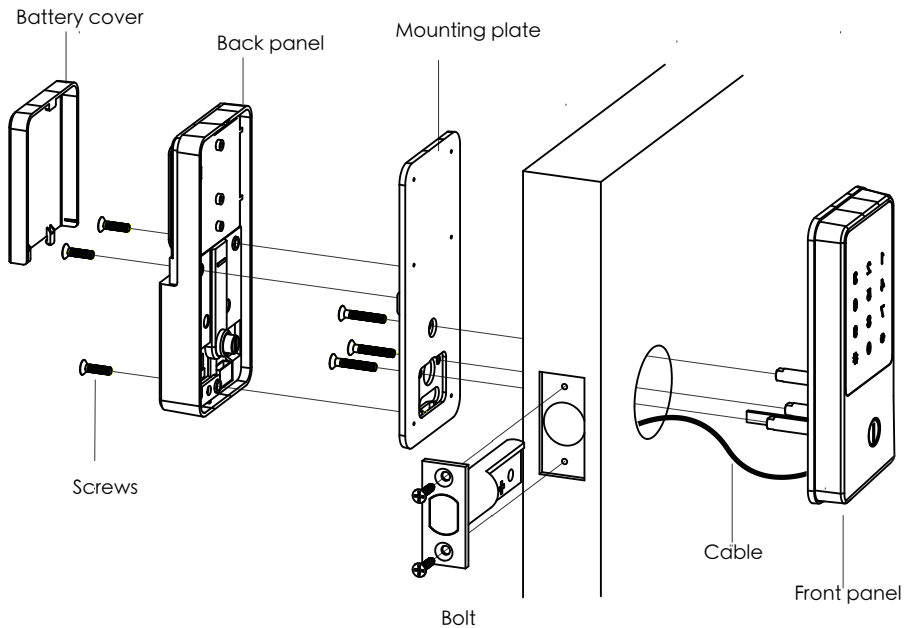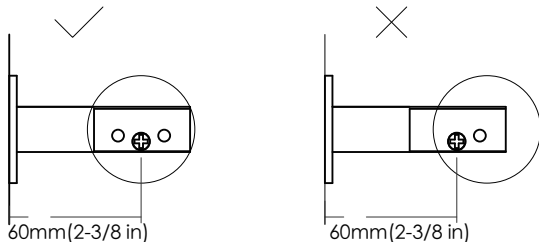
# 1   Adjust the backset of latch (if needed)

A   Hold the bolt in front of the door hole, with the latch face **flush against the door edge.**

B   If the bolt holes are centered in the door hole, no adjustment is required. Proceed to step 2. If the bolt holes are NOT centered, adjust latch. See "bolt Adjustment."
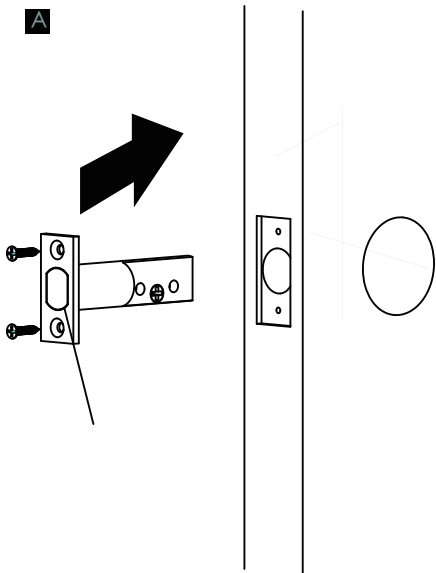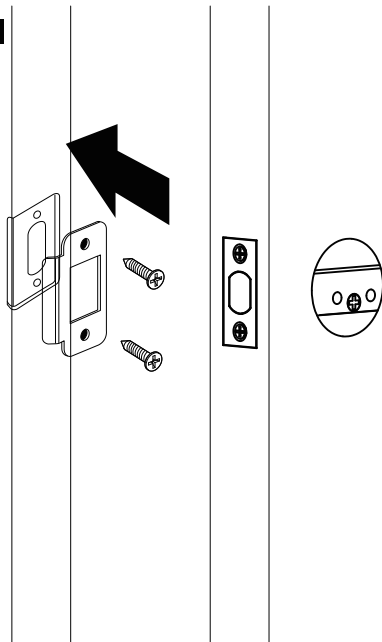
60mm(2-3/8 in)     60mm(2-3/8 in)

C   Latch adjustmen t (only if needed)

70mm(2-3/8 in)

# 2 Install Bolt

**A**

**B**
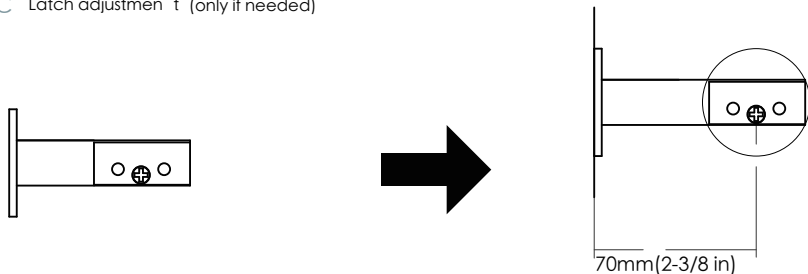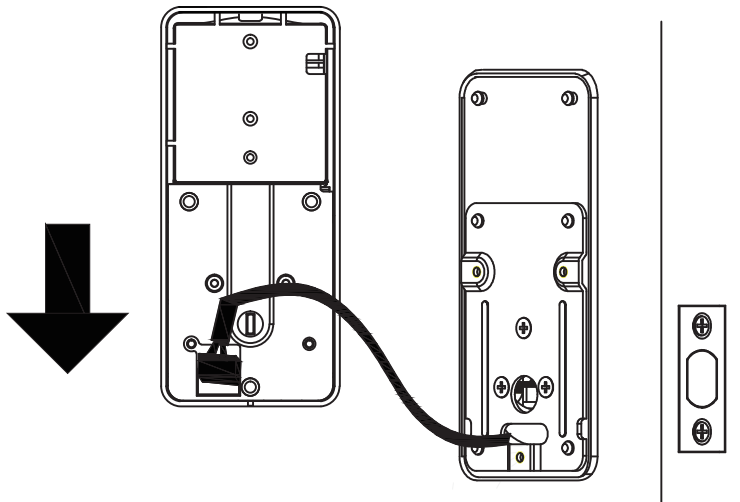
# Install front panel

IMPORTANT!

outside
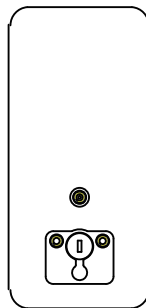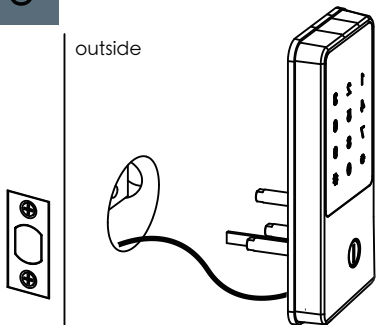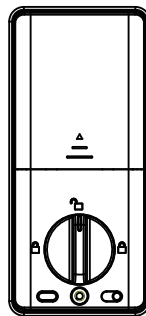
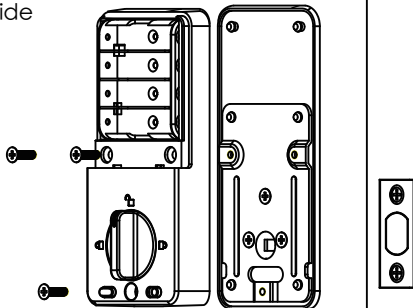The knob must be vertical

# 4 Connect wire connector



Note: Cable goes below deadbolt,The wire connectors can only be connected in one way.
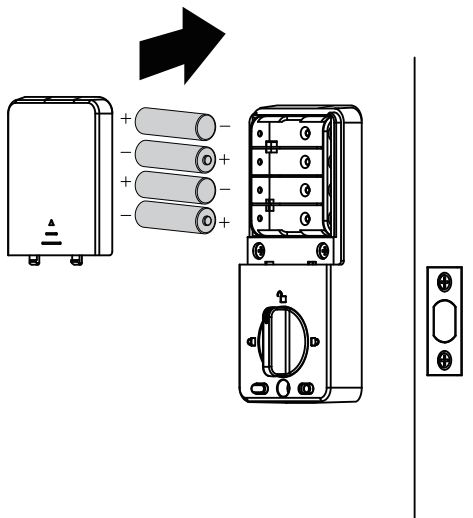
# 5 Install back panel

inside

# 6 Install batteries and battery cover

inside

# 7   Adjust lock direction



**LH**
Left-hand
(Open into room)

**RH**
Right-hand
(Open into room)

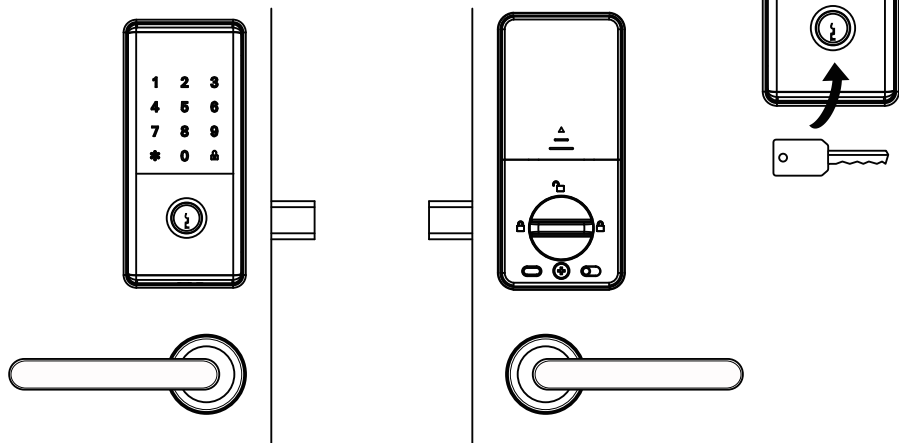Note : If Left handle open door : Choose *46# 123456# 1
If right handle open door: Choose :*46#123456#2
After choose ,input 123456# to check if lock unlock properly.

# 8 Insert the key and test the installation

Install our lock on top

# Port Security System LLC

For any technical questions or support call us on:

800 - 219 - 2366

or email us on Authority@portsmartlock.com

Visit us at:
www.portsmartlock.com