

FEATURES & SPECIFICATIONS

INTENDED USE — LBL provides a digital lighting platform to deliver general ambient lighting for surface-mount applications. Light engine delivers long life and excellent color to ensure a sound quality, low-maintenance light installation.

CONSTRUCTION — Metal parts are die formed from code-gauge steel. Prismatic diffuser is 100% acrylic with sonically welded luminous ends. Continuous side flanges on fixture body provide light trap and continuous diffuser support to prevent accidental opening and simplify maintenance.

Finish: Five-stage iron phosphate pretreatment assures superior paint adhesion and rust resistance.

Painted parts finished with high-gloss, high-reflectivity baked white polyester enamel (low VOC).

OPTICS — Curved prismatic diffuser with linear side prisms and highly transmissive overlay minimizes lamp image and provides high-angle brightness control. Luminous end plates soften appearance for improved aesthetics.

ELECTRICAL — Long-life LEDs, coupled with high-efficiency drivers, provide extended service life. LBL is rated to deliver L70 performance at 50,000 hours.

LISTINGS — CSA certified to U.S. and Canadian standards. Damp listed.

DesignLights Consortium® (DLC) qualified product. Not all versions of this product may be DLC qualified. Please check the DLC Qualified Products List at www.designlights.org/QPL to confirm which versions are qualified.

WARRANTY — 5-year limited warranty. Complete warranty terms located at www.acuitybrands.com/CustomerResources/Terms_and_conditions.aspx

Note: Specifications subject to change without notice.

Catalog Number
Notes
Type

Contractor Select


LED Wraparound

2' and 4'
LED



Specifications

Length: 24 (61.0)
48 (122.0)
Width: 10 (25.4)
Depth: 2-3/4 (7.0)




All dimensions are inches (centimeters) unless otherwise indicated.

MOUNTING DATA

For unit or row installation, surface or stem mounting. Stem mounting not available on TLB units.

Individual Installation —
Two single-stem hangers required.

Row Installation —
One hanger per fixture plus one row required.

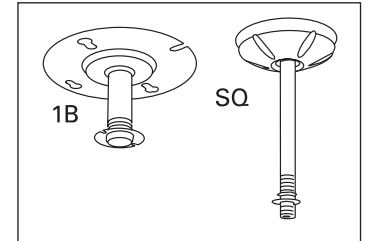

ORDERING INFORMATION

Catalog number	UPC	Description	Lumens	Color temperature	Lens type	Voltage	Wattage	Pallet qty	Standard carton qty.
LBL2 LP835	753573917564	2' LED Wraparound	2,000	3500K	Patterned #12 acrylic	120-277	26	112	1
LBL2 LP840	753573917595	2' LED Wraparound	2,000	4000K	Patterned #12 acrylic	120-277	26	112	1
LBL4 LP835	753573917601	4' LED Wraparound	4,000	3500K	Patterned #12 acrylic	120-277	50	56	1
LBL4 LP840	753573917632	4' LED Wraparound	4,000	4000K	Patterned #12 acrylic	120-277	50	56	1
LBL4 347 LP835	753573917649	4' LED Wraparound	4,000	3500K	Patterned #12 acrylic	347	50	56	1
LBL4 347 LP840	820476010279	4' LED Wraparound	4,000	4000K	Patterned #12 acrylic	347	50	56	1
LBL2 LP835 DIM	888791232363	2' LED Dimmable Wraparound	2,000	3500k	Patterned #12 acrylic	120-277	26	112	1
LBL2 LP840 DIM	888791232387	2' LED Dimmable Wraparound	2,000	4000k	Patterned #12 acrylic	120-277	26	112	1
LBL4 LP835 DIM	888791232417	4' LED Dimmable Wraparound	4,000	3500k	Patterned #12 acrylic	120-277	50	56	1
LBL4 LP840 DIM	888791232448	4' LED Dimmable Wraparound	4,000	4000k	Patterned #12 acrylic	120-277	50	56	1


Notes

- 347V option not available.
- Non-stock standard manufacturing lead times apply. Step-down transformer will not fit in LBL2.

LBL LED Wraparound

PHOTOMETRICS

LBL2 LP835, 2010.5 delivered lumens, test no. LTL22712, tested in accordance to IESNA LM-79.

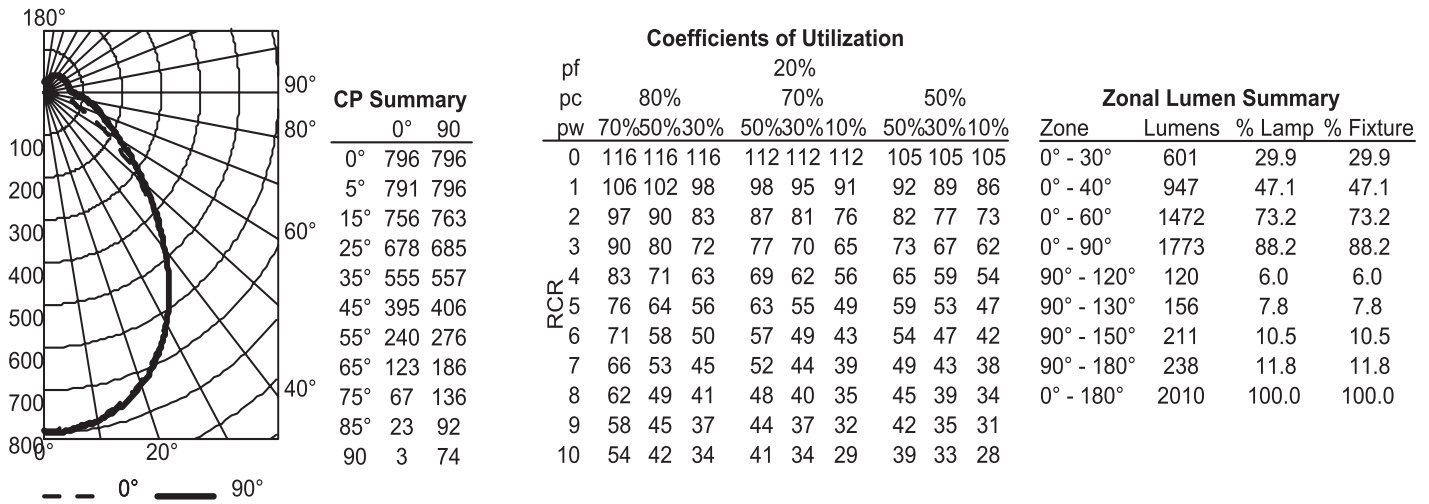

LBL4 LP835, 4050.9 delivered lumens, test no. LTL22675, tested in accordance to IESNA LM-79.

