

FEATURES & SPECIFICATIONS

INTENDED USE — Typical applications include corridors, lobbies, conference rooms and private offices.

CONSTRUCTION — 16-gauge galvanized steel mounting/plaster frame with trim clips to mount open conical shape reflector.

Vertically adjustable mounting brackets that use 16-gauge flat bar hangers (included), 1/2" conduit or C channel T-bar fasteners. Provides 3-3/4" total adjustment.

Post installation adjustment possible from above or below the ceiling.

Galvanized steel junction box with bottom-hinged access covers and spring latches. Two combination 1/2"-3/4" and three 1/2" knockouts for straight-through conduit runs. Capacity: 8 (4 in, 4 out) No. 12 AWG conductors, rated for 90°C.

Secondary housing adjustment system for precise, final ceiling-to-flange alignment.

Maximum 1-1/2" ceiling thickness.

OPTICS — LED light source with diffused lens, recessed in a deep reflector with a 55-degree cutoff. Aluminum full reflectors are optically designed to maximize lumen output and to provide superior glare control.

Anodized trim colors for open and wallwash reflectors are available in clear, pewter, wheat or gold. White polyester powder coat also available.

Minimum CRI of 80.

ELECTRICAL — High-efficiency, 0-10V dimming driver mounted to the junction box, dims luminaire to 10% of its light output. 1% dimming option available (see EZ1 ordering options below).

Dimming fixture requires two (2) additional low-voltage wires to be pulled.

For compatible dimmers and dimming range, refer to Dimmer Compatibility Chart on page 4.


The system maintains 70% lumen output for more than 50,000 hours.

LISTINGS — CSA certified to US and Canadian safety standards. Open downlight (LO6): Wet location listed. Wallwash downlight (LW6): Rated for damp and dry locations only. ENERGY STAR® certified.

WARRANTY — 5-year limited warranty. Complete warranty terms located at www.acuitybrands.com/CustomerResources/Terms_and_conditions.aspx

Note: Specifications subject to change without notice.


Catalog Number
Notes
Type

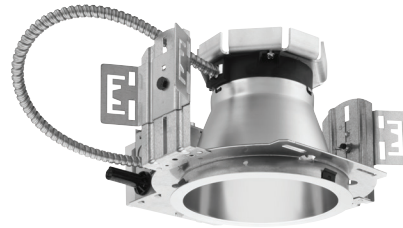

LDN6 35/15 L06AR 120

LDN6

6" OPEN and WALLWASH LED Non-IC New Construction Downlight

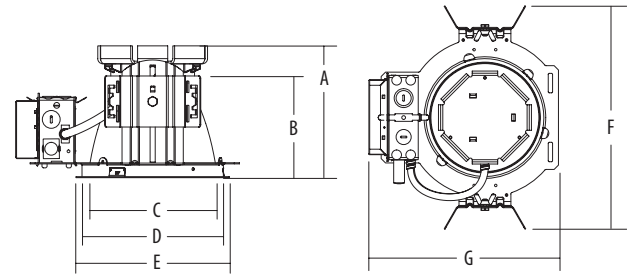

Overall height varies by lumen package. Reference dimension chart for details.

Maximum Overall Dimensions — All dimensions are inches (centimeters) unless otherwise indicated.							
Lumen package	(A) Height	(B) Frame height	(C) Aperture	(D) Ceiling opening	(E) Outside diameter	(F) Width	(G) Length
600 lm	6-7/16 (16.4)	5-3/4 (14.6)	6-15/16 (17.6)	7-1/8 (18.1)	7-1/2 (19.1)	12-15/16 (32.8)	10-15/16 (27.8)
1000 lm							
1500 lm							
2000 lm	7-13/16 (19.9)						

ORDERING INFORMATION

Lead times will vary depending on options selected. Consult with your sales representative.

Example: LDN6 35/15 L06AR 120

Series	Color temperature	Lumens ^{1,2}	Reflector	Trim color	Finish	Voltage	Options
LDN6	27/ 2700 K	06 600 lumens	L06 Open downlight	AR Clear	(blank) Semi-specular	120	EL Emergency battery pack with integral test switch ⁶
	30/ 3000 K	10 1000 lumens	LW6 Wallwash downlight ³	PR Pewter	LD Matte-diffuse	277	ELR Emergency battery pack with remote test switch ⁶
	35/ 3500 K	15 1500 lumens		WTR Wheat	LS Specular	347 ⁵	SF Single fuse
	40/ 4000 K	20 2000 lumens		GR Gold		TRW White painted flange ⁷	
				WR White ⁴			TRBL Black painted flange
							NEPP Interface for Sensor Switch® nLight® network provided with integral power supply. Refer to TN-623-01 . ⁸
							RRL___ RELOC®-ready luminaire connectors enables a simple and consistent factory installed option across all ABL luminaire brands. Refer to RRL for complete nomenclature.
							EZ1 eldoLED dims to 1%
							CP Chicago plenum ^{5,9}

Accessories: Order as separate catalog number.

EAC ISSM 375	Compact interruptible emergency AC power system
EAC ISSM 125	Compact interruptible emergency AC power system
NSPS D ER KIT	Sensor Switch nLight secondary relay and dimming pack device used to switch and dim luminaires powered via an emergency circuit. Refer to NSPS D ER KIT .
GRA68 JZ	Oversized trim ring with 8" outside diameter ¹⁰
SCA6	Sloped ceiling adapter. Refer to TECH-SCA for more options.

Notes

- 1 Approximate lumen output.
- 2 Overall height varies by lumen package. Reference dimension chart on page 1.
- 3 Rated for damp and dry locations only.
- 4 Not available with finishes.
- 5 Not available with emergency options.
- 6 For dimensional changes, refer to chart on page 4. Not available with CP option.
- 7 Not available with WR (white trim color).
- 8 For emergency generator/inverter applications order non-nLight enabled fixture and NSPS D ER KIT as an accessory. Refer to [NSPS D ER KIT](#).
- 9 277 volt CP products require marked spacing. Install with minimal spacing between: (a) Center-to-center of adjacent luminaires: 2 ft.; (b) Top of luminaire to overhead building member: 3 in.; (c) Luminaire center to side of building member: 1 ft.
- 10 Refer to [TECH-GOOF RINGS](#) for more options.

LDN6

PHOTOMETRY

Distribution Curve


Distribution Data

Output Data


Coefficient of Utilization

Illuminance Data at 30" Above Floor for a Single Luminaire


LDN6 35/10 L06AR 120, input watts: 18, delivered lumens: 1089, LM/W = 61, spacing criterion at 0 = 1.03, test no. LTL25148SL.

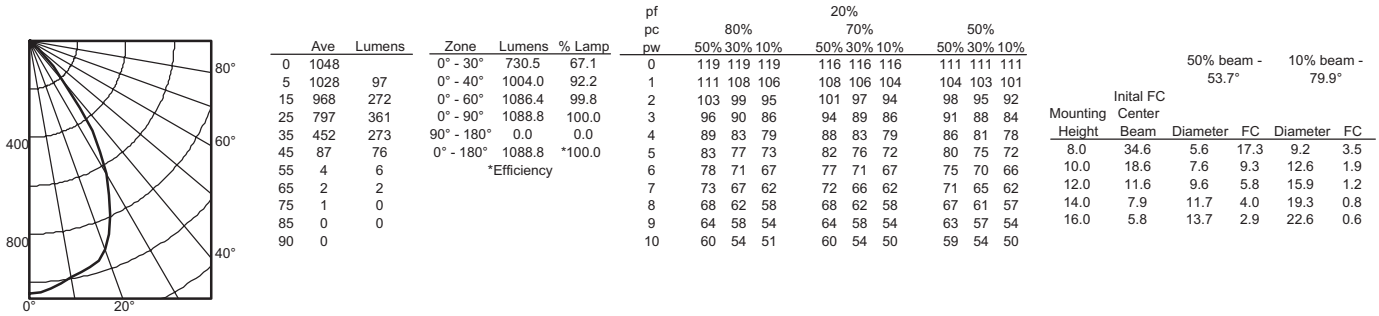

LDN6 35/15 L06AR 120, input watts: 26, delivered lumens: 1633, LM/W = 63, spacing criterion at 0 = 1.03, test no. LTL25146.

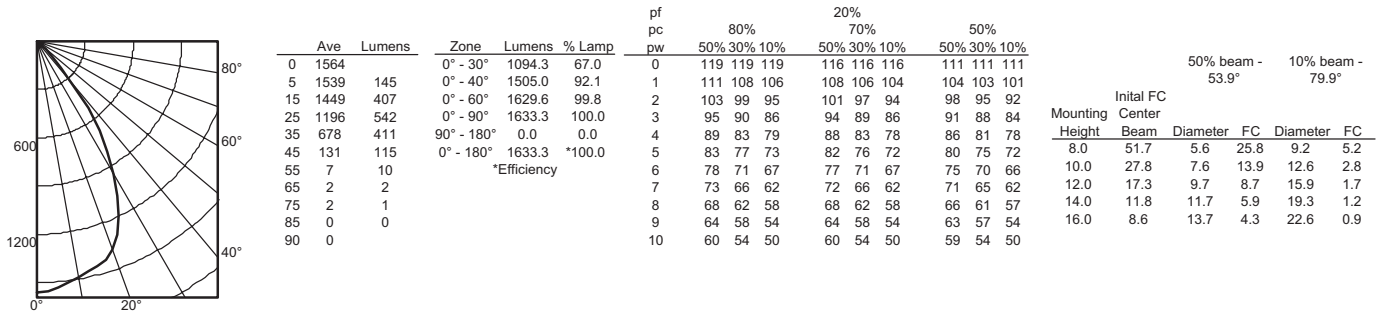

LDN6 35/20 L06AR 120, input watts: 35, delivered lumens: 2143, LM/W = 61, spacing criterion at 0 = 1.04, test no. LTL25144.

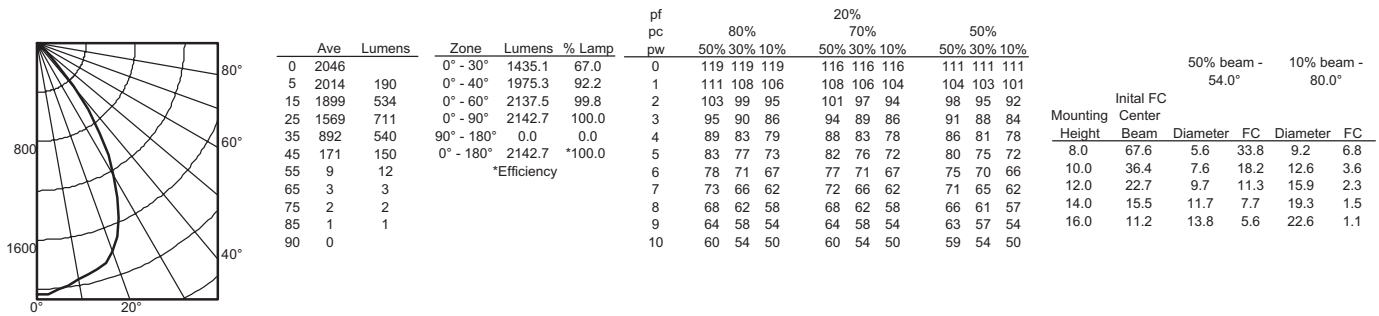


Notes

- Tested in accordance with IESNA LM-79-08.
- Tested to current IES and NEMA standards under stabilized laboratory conditions.
- Actual performance may differ as a result of end-user environment and application.
- Actual wattage may differ by +/- 10% when operating between 120-277V +/- 10%.
- CRI: 80 typical.

TECHNICAL INFORMATION

Footcandle values are initial and tables are based on minimum of six units. For fixture-to-wall distance other than those shown, use maximum of one-to-one spacing (distance between fixtures not more than distance to wall) for best results.



Candlepower Data

Footcandle values

LDN6 35/10 LW6AR 120, input watts: 18, delivered lumens: 1090, LM/W = 61, test no. LTL25147.

Vertical Angle	Plane angle							
	Wall	22.5	45	67.5	90	112.5	135	157.5
0	888	888	888	888	888	888	888	888
5	813	811	824	854	875	902	922	926
15	652	675	728	803	862	905	930	935
25	488	524	601	678	723	748	749	741
35	319	355	387	414	409	407	409	403
45	241	229	190	139	87	76	76	74
55	181	172	114	40	9	5	7	8
65	139	117	57	11	1	2	3	4
75	74	57	19	3	2	2	3	2
85	19	13	0	0	0	0	0	0
90	5	6	0	0	0	0	0	0

ft. from ceiling	Wallwash Illuminance Study (fc)								
	Illuminance on wall from 6 luminaires								
	Luminaire mounted 3 ft. from wall			Luminaire mounted 3 ft. from wall			Luminaire mounted 3 ft. from wall		
	3 ft. between luminaires			4 ft. between luminaires			5 ft. between luminaires		
	3	3.5	4	3	3.5	4	3	3.5	4
1	10	8	10	9	5	9	9	2	9
2	15	15	15	13	10	13	12	6	12
3	15	14	15	12	10	12	10	7	10
4	13	14	13	10	11	10	8	8	8
5	12	13	12	9	10	9	7	8	7
6	12	12	12	8	9	8	7	7	7
7	10	10	10	8	8	8	6	6	6
8	9	9	9	7	7	7	5	5	5
9	8	8	8	6	6	6	5	5	5
10	6	6	6	5	5	5	4	4	4

LDN6 35/15 LW6AR 120, input watts: 26, delivered lumens: 1639, LM/W = 63, test no. LTL25145.

Vertical Angle	Plane angle							
	Wall	22.5	45	67.5	90	112.5	135	157.5
0	1312	1312	1312	1312	1312	1312	1312	1312
5	1198	1187	1202	1244	1285	1326	1371	1409
15	956	976	1052	1153	1246	1333	1403	1438
25	697	720	837	953	1028	1082	1109	1126
35	442	482	548	586	583	590	612	623
45	348	336	303	222	132	105	112	115
55	283	269	196	80	19	8	10	11
65	230	191	102	22	3	2	3	6
75	121	88	30	1	1	1	1	4
85	30	18	1	1	0	0	0	0
90	5	6	0	2	1	1	1	0

ft. from ceiling	Wallwash Illuminance Study (fc)								
	Illuminance on wall from 6 luminaires								
	Luminaire mounted 3 ft. from wall			Luminaire mounted 3 ft. from wall			Luminaire mounted 3 ft. from wall		
	3 ft. between luminaires			4 ft. between luminaires			5 ft. between luminaires		
	3	3.5	4	3	3.5	4	3	3.5	4
1	17	13	17	16	7	16	15	4	15
2	24	24	24	20	16	20	19	10	19
3	22	22	22	17	16	17	15	11	15
4	20	21	20	14	16	14	12	12	12
5	18	19	18	13	15	13	10	12	10
6	17	17	17	12	13	12	9	11	9
7	15	15	15	11	11	11	9	9	9
8	13	13	13	10	10	10	8	8	8
9	11	11	11	8	8	8	7	7	7
10	9	9	9	7	7	7	6	6	6

LDN6 35/20 LW6AR 120, input watts: 35, delivered lumens: 2137, LM/W = 61, test no. LTL25143.

Vertical Angle	Plane angle							
	Wall	22.5	45	67.5	90	112.5	135	157.5
0	1712	1712	1712	1712	1712	1712	1712	1712
5	1566	1544	1598	1633	1710	1739	1783	1806
15	1254	1276	1394	1533	1658	1755	1811	1834
25	913	956	1140	1307	1420	1489	1512	1521
35	592	654	766	839	851	852	855	861
45	446	425	402	325	215	170	167	167
55	335	317	248	115	32	13	12	14
65	251	213	129	35	5	4	5	5
75	121	92	39	4	1	1	1	3
85	24	14	2	0	1	0	0	0
90	1	1	1	0	1	1	1	0

ft. from ceiling	Wallwash Illuminance Study (fc)								
	Illuminance on wall from 6 luminaires								
	Luminaire mounted 3 ft. from wall			Luminaire mounted 3 ft. from wall			Luminaire mounted 3 ft. from wall		
	3 ft. between luminaires			4 ft. between luminaires			5 ft. between luminaires		
	3	3.5	4	3	3.5	4	3	3.5	4
1	17	13	17	16	7	16	16	4	16
2	28	27	28	23	18	23	22	11	22
3	28	27	28	22	19	22	19	14	19
4	26	27	26	19	20	19	16	15	16
5	24	25	24	17	20	17	13	16	13
6	22	22	22	16	17	16	12	15	12
7	20	20	20	15	15	15	11	13	11
8	17	17	17	13	13	13	10	11	10
9	15	15	15	11	11	11	9	9	9
10	13	13	12	10	10	10	8	8	8

Notes

- Tested in accordance with IESNA LM-79-08.
- Tested to current IES and NEMA standards under stabilized laboratory conditions.
- Actual performance may differ as a result of end-user environment and application.
- Actual wattage may differ by +/- 10% when operating between 120-277V +/- 10%.
- CRI: 80 typical.



ADDITIONAL DATA

DIMMER COMPATIBILITY CHART	
Manufacturer	Model/Series
600 & 1000 Lumen products	
Leviton	IllumaTech - IP710-DLX
Lutron	Nova T - NTFTV-WH <i>For on/off control, this switch requires a power pack. Consult Lutron for more information.</i>
Sensor Switch	nPODM DX
Synergy	ISD BC 120/277
1500 & 2000 Lumen products	
Busch-Jaeger	2112U-101
Jung	240-10
Leviton Lighting Controls	IllumaTech - IP710-DLX
Lightolier Controls	ZP600FAM120
Lutron Electronics	Nova T - NTFTV
	Divia - DVTV
	Divia - NFTV
	GraphicEye - GRX-TVI w GRX3503
	Energy Savr Node - QSN-4T16-S
TVM2 Module	
Merten	5729
Pass & Seymour	CD4FB-W
Sensor Switch	nPODM DX
Synergy	ISD BC 120/277
The Watt Stopper	DCLV1

EL/ELR AVAILABILITY/COMPATIBILITY - INITIAL LUMENS			
Lumen package	Watts	Initial lumens EL/ELR	Emergency LED driver
600	12	500	PS1030
1000	18	575	PS1030
1500	26	640	Bodine BSL17C-C2
2000	35	690	Bodine BSL17C-C2

EL/ELR DIMENSIONAL CHANGES	
Add to overall housing length for EL/ELR option	Overall housing width with EL/ELR option
4-1/2	16-1/2

KEY SPECIFICATION SUMMARY				
Product Description	Watts (W)	Delivered lumens (lm)	Efficacy (lm/W)	Spacing criteria (s/mh)
LDN6 35/06 LO6AR	12	670	56	1.03
LDN6 35/10 LO6AR	18	1090	61	1.03
LDN6 35/15 LO6AR	26	1640	63	1.03
LDN6 35/20 LO6AR	35	2140	61	1.04