

FEATURES & SPECIFICATIONS

Provides general illumination in residential and light commercial applications. Ideal for use in workshops, utility rooms and garages

CONSTRUCTION

The shoplight's 5-1/2" white reflector provides a wide spread illumination. Fully assembled, ready-toinstall. Comes with 5' power cord - no wiring required. Supplied with (2) "S" hooks and (2) 9-1/2" chains for no-hassle installation.

OPTICS

Utilizes (2) 40W, 34W or 25W linear T12 fluorescent lamps for energy efficiency. (not included)

Standard with low-power factor magnetic ballast (120 volt, 60Hz).

LISTINGS

CUL listed to US and Canadian safety standards and suitable for damp locations.


WARRANTY


2-year limited warranty. Complete warranty terms located at www.acuitybrands.com/CustomerResources/Terms_and_conditions.aspx

NOTE: Actual performance may differ as a result of end-user environment and application. Specifications subject to change without notice.

Dimensions

All dimensions are inches (centimeters)

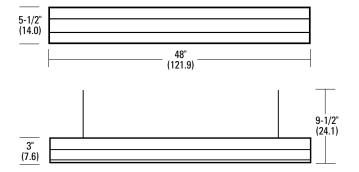



Indoor General Purpose

Shop Light

Utility

Linear T12 Fluorescent





Example: 1233

ORDERING INFORMATION

For shortest lead times, configure products using **bolded options**.

1233		
Series ^{1,2,3}	3,4	Ballast/voltage
1233	(2) 40W, 34W or 25W linear T12 fluorescent lamps required	(blank) 120-volt residential electronic ballast (standard) Other voltage and ballast types (consult factory)

- Lamps not included.
- Use with non-dimmable switches only.
- Not designed to be mounted flush to the ceiling.

Must be plugged into three pronged outlets to avoid electrical shock and to ensure reliable starting.

