

Catalog Number
Notes
Type

FEATURES & SPECIFICATIONS

INTENDED USE

This fresh and innovative track head combines aesthetics with superior functionality for applications such as specialty retail, grocery, galleries, museums, hospitality, residential and educational environments.

CONSTRUCTION

Lamp holder: Clear ribbed glass with brushed nickel fittings sheds light in desired areas. 50W MR16GU10 lamp included.

Note: Lithonia Decorative Track Lighting components are not compatible with Lithonia Commercial Track Lighting components. Installation of mixed components will result in risk of shock hazard or fire, damage of fixture, failure to illuminate, and it does not meet UL standards.

Available in brushed nickel.

ELECTRICAL

50W MR16 lamp uses a GU10 base 12V porcelain bipin twist lock socket.

120 VAC 60Hz.

LISTINGS

cETL_{us} Listed to UL1574 Track Lighting Standard.

Dry location.

WARRANTY

1-year limited warranty. Complete warranty terms located at:

www.acuitybrands.com/CustomerResources/Terms_and_conditions.aspx.

Note: Actual performance may differ as a result of end-user environment and application.

Specifications subject to change without notice.

Decorative Track Lighting


LTHCLRB MR16 SERIES

Halogen Line Voltage Track Head
MR16 GU10 Lamps



Specifications			
Lamp designation	Width	Length	Maximum height
MR16	3-1/4	4-3/4	7

All dimensions are inches (centimeters) unless otherwise indicated.



ORDERING INFORMATION






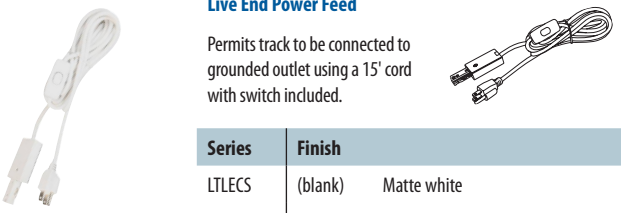



All configurations of this product are considered "standard" and have short lead times.

Example: LTHCLRB MR16GU10 BN

LTHCLRB	MR16GU10	BN
Series	Lamp/Lumen output	Finish
LTHCLRB Clear ribbed glass track head	MR16GU10 50W, 600 lumens (per head)	BN Brushed nickel

LTHCLRB MR16 Halogen Line Voltage Track Head

TRACK ACCESSORIES

 <p>Live End Conduit Connects to the end of the linear track section supplying power from a conduit feed.</p> <table border="1"> <thead> <tr> <th>Series</th> <th>Finish</th> </tr> </thead> <tbody> <tr> <td>LTLECF</td> <td>(blank) Matte white connector with black cover</td> </tr> </tbody> </table>	Series	Finish	LTLECF	(blank) Matte white connector with black cover	 <p>Floating Feed Permits track to be wired anywhere along track length.</p> <table border="1"> <thead> <tr> <th>Series</th> <th>Finish</th> </tr> </thead> <tbody> <tr> <td>LTFC</td> <td>(blank) Matte white connector with black and white cover</td> </tr> </tbody> </table>	Series	Finish	LTFC	(blank) Matte white connector with black and white cover
Series	Finish								
LTLECF	(blank) Matte white connector with black cover								
Series	Finish								
LTFC	(blank) Matte white connector with black and white cover								
 <p>L Connector Joins two track sections to make a 90° angle.</p> <table border="1"> <thead> <tr> <th>Series</th> <th>Finish</th> </tr> </thead> <tbody> <tr> <td>LTLDL</td> <td>(blank) Matte white connector with black cover</td> </tr> </tbody> </table>	Series	Finish	LTLDL	(blank) Matte white connector with black cover	 <p>Live End Junction Box Feed Connects to the end of the linear track section supplying power from a junction box.</p> <table border="1"> <thead> <tr> <th>Series</th> <th>Finish</th> </tr> </thead> <tbody> <tr> <td>LTLLDLC</td> <td>(blank) Matte white connector with black cover</td> </tr> </tbody> </table>	Series	Finish	LTLLDLC	(blank) Matte white connector with black cover
Series	Finish								
LTLDL	(blank) Matte white connector with black cover								
Series	Finish								
LTLLDLC	(blank) Matte white connector with black cover								
 <p>Straight Connector Joins two track sections in a straight run.</p> <table border="1"> <thead> <tr> <th>Series</th> <th>Finish</th> </tr> </thead> <tbody> <tr> <td>LTCV</td> <td>(blank) Matte white connector with black cover</td> </tr> </tbody> </table>	Series	Finish	LTCV	(blank) Matte white connector with black cover	 <p>Live End Power Feed Permits track to be connected to grounded outlet using a 15' cord with switch included.</p> <table border="1"> <thead> <tr> <th>Series</th> <th>Finish</th> </tr> </thead> <tbody> <tr> <td>LTLECS</td> <td>(blank) Matte white</td> </tr> </tbody> </table>	Series	Finish	LTLECS	(blank) Matte white
Series	Finish								
LTCV	(blank) Matte white connector with black cover								
Series	Finish								
LTLECS	(blank) Matte white								
 <p>T Connector Joins three sections at 90° angles.</p> <table border="1"> <thead> <tr> <th>Series</th> <th>Finish</th> </tr> </thead> <tbody> <tr> <td>LTC</td> <td>(blank) Matte white connector with black cover</td> </tr> </tbody> </table>	Series	Finish	LTC	(blank) Matte white connector with black cover	 <p>Monopoint Allows for a single linear track head to be installed in into an existing junction box.</p> <table border="1"> <thead> <tr> <th>Series</th> <th>Finish</th> </tr> </thead> <tbody> <tr> <td>LTMPR</td> <td>(blank) Matte white</td> </tr> </tbody> </table>	Series	Finish	LTMPR	(blank) Matte white
Series	Finish								
LTC	(blank) Matte white connector with black cover								
Series	Finish								
LTMPR	(blank) Matte white								
	 <p>Track Stick 4-foot or 8-foot, 1-circuit track section with end caps.</p> <table border="1"> <thead> <tr> <th>Series</th> <th>Finish</th> </tr> </thead> <tbody> <tr> <td>LTS4</td> <td>MW Matte white</td> </tr> <tr> <td>LTS8</td> <td>DBL Black</td> </tr> </tbody> </table>	Series	Finish	LTS4	MW Matte white	LTS8	DBL Black		
Series	Finish								
LTS4	MW Matte white								
LTS8	DBL Black								