

Catalog Number	
Notes	Туре

General Purpose

FEATURES & SPECIFICATIONS

INTENDED USE

Provides general illumination in residential and light commercial applications. Ideal for use in workshops, utility rooms and garages.

ATTRIBUTES

This attractive shoplight with textured finish is for chain mounting only. Includes 12" of chain. Starts reliably down to 0° (-18° C). Fully assembled, ready-to-install. Comes with 5' power cord - no wiring required. Easy on/off power switch with beaded chain.

Utilizes (2) 32W linear T8 fluorescent lamps (F32T8/735) for energy efficiency, superior color rendering and 10,000 hour average lamp life. (not included)

Standard with residential HPF electronic ballast (120 volt, 60Hz). Instant on, ensures no flickering and quiet operation without interfering with other home electronics. Starts instantly down to $0^{\circ}F$ (-18°C).

All mounting hardware included.

For use with non-dimmable switches only.

LISTING


CUL listed to US and Canadian safety standards and suitable for damp locations. ENERGY STAR $\!\!\!^{\text{(S)}}$ certified.

WARRANTY

Guaranteed for two years against mechanical defects in manufacture.

All Weather Shoplight


Linear T8 Fluorescent

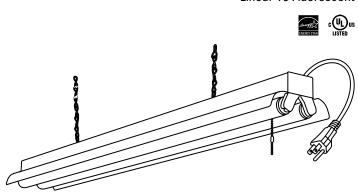

DIMENSIONS


All dimensions are in inches (centimeters)

Nominal	Model	Number	(A) Length	(B) Width	(C) Height
Size	No.	of Lamps	Inches (cm)	Inches (cm)	Inches (cm)
4′	1242Z	2	48" (121.9)	6" (15.2)	2-3/4" (7)



ORDERING INFORMATION

Choose the boldface catalog nomenclature that best suits your needs and write it on the appropriate line. Order accessories as separate catalog numbers.



Example: 1242ZG

All Weather Shoplight Utility

PHOTOMETRICS

Full photometric data report available within 2 weeks from request. Consult factory.

