

## FEATURES & SPECIFICATIONS

### INTENDED USE

Provides general illumination in residential and light commercial applications. Ideal for use in workshops, utility rooms, and garages.

### CONSTRUCTION

The steel Wire Guard helps provide protection to the fixture bulb area. Includes a 5' power cord, 5A Max. convenience outlet and a pull chain power switch. The residential electronic ballast (120V 60Hz 1.50 Amps) starts reliably down to 0°F For use on non-dimmable switches only.

### ELECTRICAL

Utilizes (4) 32W linear T8 fluorescent lamps (not included).

### INSTALLATION

Fully assembled, ready to install. Chain mount to ceiling using the 12" mounting chains. All mounting hardware is included.

### LISTINGS

cUL Listed to US and Canadian safety standards.

### WARRANTY

3-year limited warranty. Complete warranty terms located at [www.acuitybrands.com/CustomerResources/Terms\\_and\\_conditions.aspx](http://www.acuitybrands.com/CustomerResources/Terms_and_conditions.aspx)



**NOTE:** Actual performance may differ as a result of end-user environment and application. Specifications subject to change without notice.

#### Specifications

Length: 48 (121.9)

Width: 12 (30.5)

Height: 4 (10.2)




All dimensions are in inches (centimeters) unless otherwise indicated.

Catalog Number
Notes
Type

Indoor General Purpose

# 4L Grid Shoplight

LINEAR T8 FLUORESCENT

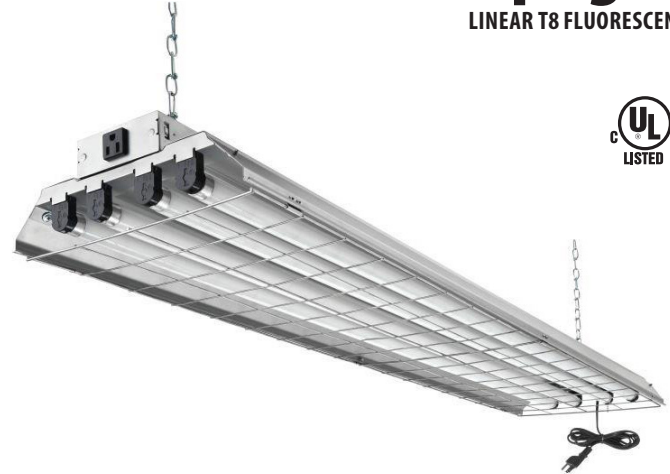

### ORDERING INFORMATION

Example: 1284GRD RE

<b>1284GRD</b>	<b>RE</b>
<b>Series</b>	<b>Ballast/voltage</b>
<b>1284GRD</b> Requires (4) T8 fluorescent lamps (not included)	<b>RE</b> 120V residential electronic ballast