

FEATURES & SPECIFICATIONS

INTENDED USE

Provides general illumination in residential and commercial applications. Ideal for use in garages, corridors, utility areas, workshops and more.

CONSTRUCTION

Features a white high-gloss polycarbonate diffuser with passive infrared (PIR) motion sensor for easy on/off operation. The 360° PIR sensor activates when motion is detected. Can be pre-set to automatically turn off from 1 to 10 minutes.

OPTICS

The SGLL produces 5,000 lumens. Standard input = 80 watts.

80 and 90 CRI.

Minimum starting temperature at -22°F.

ELECTRICAL

Fixture operates at 120 volts, 60 Hz.

INSTALLATION

Flush or suspension mount. Plug in or direct wire. Can link multiple fixtures (FLUSH MOUNT ONLY). End-to-end connector included (18" linking connector cord sold separately). 18-inch adjustable suspension mount aircraft cable is also included. Mounting hardware included, for installation to j-box.

LISTINGS

UL Certified to US and Canadian standards and listed suitable for damp locations. ENERGY STAR® certified.

WARRANTY

5-year limited warranty. Complete warranty terms located at www.acuitybrands.com/CustomerResources/Terms_and_conditions.aspx

NOTE: Actual performance may differ as a result of end-user environment and application. All values are design or typical values, measured under laboratory conditions at 25°C. Specifications subject to change without notice.


Catalog Number
Notes
Type

Decorative Indoor

LED Garage Light Flush Mount



HIGH-PERFORMANCE LED




Plug in to link multiple fixtures.

Specifications

Width: 10-7/16 (26.4)
Length: 24-7/16 (62.1)
Depth: 3-1/2 (8.9)
Weight: 5 (2.3)

All dimensions are inches (centimeters) unless otherwise indicated.

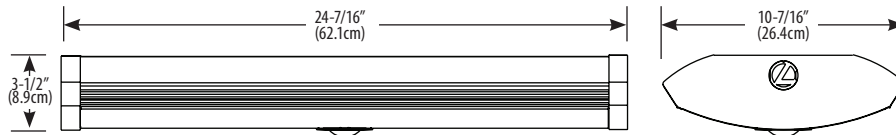

ORDERING INFORMATION

For shortest lead times, configure product using **bolded options**.

Example: SGLL 24 40K 80CRI PIR


SGLL	24		PIR
Series	Length	Color temperature / CRI	Controls
SGLL LED garage light	24 24"	40K 80CRI 40K 90CRI ¹	PIR Passive infrared sensor

Notes

¹ 90-day lead time. Minimum order qty. of 50.

LED Garage Light

LIGHTING FACTS

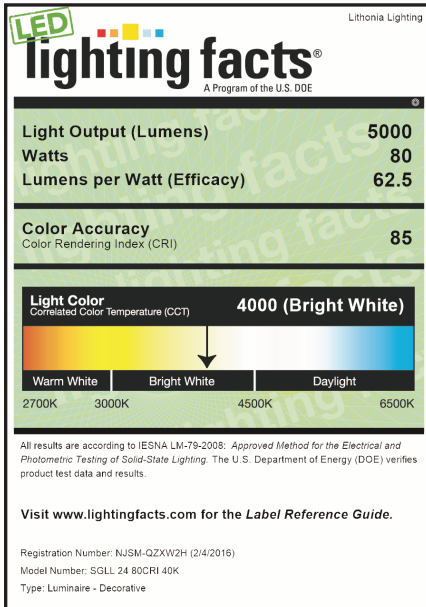

PHOTOMETRICS

Full photometric data report available within 2 weeks from request. Consult factory.