



WST LED

Architectural Wall Sconce



Catalog Number

Notes

Type

Hit the Tab key or mouse over the page to see all interactive elements.

Specifications

Luminaire

Height: 8-1/2"
(21.59 cm)

Width: 17"
(43.18 cm)

Depth: 10-3/16"
(25.9 cm)



Weight: 20 lbs
(9.1 kg)

Optional Back Box (BBW)

Height: 4"
(10.2 cm)

Width: 5-1/2"
(14.0 cm)

Depth: 1-1/2"
(3.8 cm)

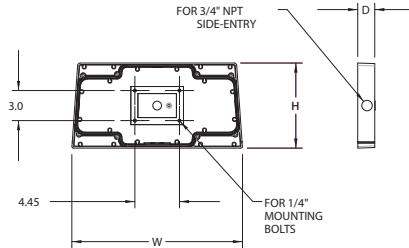

Introduction

The WST LED is designed with the specifier in mind. The traditional, trapezoidal shape offers a soft, non-pixelated light source for end-user visual comfort. For emergency egress lighting, the WST LED offers six battery options, including remote. For additional code compliance and energy savings, there is also a Bi-level motion sensor option. With so many standard and optional features, three lumen packages, and high LPW, the WST LED is your "go to" luminaire for most any application.

Ordering Information

EXAMPLE: WST LED P1 40K VF MVOLT DDBTXD

WST LED						
Series	Performance Package	Color temperature	Distribution	Voltage		Mounting
WST LED	P1 1,500 Lumen package	27K 2700 K	VF Visual comfort forward throw	MVOLT ¹	277 ¹	Shipped included (blank) Surface mounting bracket Shipped separately BBW Surface-mounted back box ² PBBW Premium surface-mounted back box ^{2,3}
	P2 3,000 Lumen package	30K 3000 K	VW Visual comfort wide	120 ¹	347	
	P3 6,000 Lumen package	40K 4000 K		208 ¹	480	
		50K 5000 K		240 ¹		

Options			Finish (required)			
PE	Photoelectric cell, button type	E7WC	Emergency battery backup (cold, 7W) ^{8,9}	DDBXD	Dark bronze	
PER	NEMA twist-lock receptacle only	E7WHR	Remote emergency battery backup (remote 7W) ^{8,10}	DBLXD	Black	
PER5	Five-wire receptacle only	E20WH	Emergency battery backup (20W) ^{8,11}	DNAXD	Natural aluminum	
PER7	Seven-wire receptacle only	E20WC	Emergency battery backup (cold, 20W) ^{8,9,11}	DWHXD	White	
DMG	0-10V dimming extend out back of housing for external control (no control) ⁴	E23WHR	Remote emergency battery backup (remote 20W) ^{8,10}	DSSXD	Sandstone	
PIR	Motion/Ambient Light Sensor, 8-15' mounting height ⁵	LCE	Left side conduit entry ¹²	DBBXTD	Textured dark bronze	
PIR1FC3V	Motion/ambient sensor, 8-15' mounting height, ambient sensor enabled at 1fc ⁵	RCE	Right side conduit entry ¹²	DBLBXD	Textured black	
PIRH	180° motion/ambient light sensor, 15-30' mounting height ⁵	Shipped separately			DNATXD	Textured natural aluminum
PIRH1FC3V	Motion/ambient sensor, 15-30' mounting height, ambient sensor enabled at 1fc ⁵	RBPW	Retrofit back plate ²	DWHGXD	Textured white	
SF	Single fuse (120, 277, 347V) ⁶	VG	Vandal guard ¹³	DSSTXD	Textured sandstone	
DF	Double fuse (208, 240, 480V) ⁶	WG	Wire guard ¹³			
DS	Dual switching ⁷					
E7WH	Emergency battery backup (7W) ⁸					

Accessories

Ordered and shipped separately.

WSTVCPBBW DDBXD U	Premium Surface - mounted back box
WSTBBW DDBTX U	Surface - mounted back box
RBPW DDBXD U	Retrofit back plate

NOTES

- MVOLT driver operates on any line voltage from 120-277V (50/60 Hz). Specify 120, 208, 240 or 277 options only. when ordering with button type photocell (PE), fusing (SF, DF), or dual switching (DS).
- Also available as a separate accessory; see accessories information.
- Top conduit entry standard.
- Not available with E7WH, E7WC, E7WHR, E20WC, E20WH, or E23WHR. Not available with PER5 & PER7.
- Not available with PE, PER, PER5, PER7, VG or WG.
- Not available with MVOLT option. Button photocell (PE) can be ordered with a dedicated voltage option. Single fuse (SF) requires 120, 277 or 347 voltage option. Double fuse (DF) requires 208, 240 or 480 voltage option.
- Not available with E7WH, E7WC, E7WHR, E20WC, E20WH, or E23WHR. Used

with inverter system. Not available with 347/480V. Not available with PE, PER, PER5 & PER7.

- Not available with 347/480V.
- Battery pack rated for -20° to 40°C.
- Comes with PBBW.
- Warranty period is 3-years.
- Not available with BBW.
- Must order with fixture; not an accessory.



Emergency Battery Operation


The emergency battery backup is integral to the luminaire — no external housing required! This design provides reliable emergency operation while maintaining the aesthetics of the product.

All emergency backup configurations include an independent secondary driver with an integral relay to immediately detect AC power loss, meeting interpretations of [NFPA 70/NEC 2008 - 700.16](#)


The emergency battery will power the luminaire for a minimum duration of 90 minutes (maximum duration of three hours) from the time supply power is lost, per [International Building Code Section 1006](#) and [NFPA 101 Life Safety Code Section 7.9](#), provided luminaires are mounted at an appropriate height and illuminate an open space with no major obstructions.

The examples below show illuminance of 1 fc average and 0.1 fc minimum of the P1 power package and VF distribution product in emergency mode.

10' x 10' Gridlines
8' and 12' Mounting Height

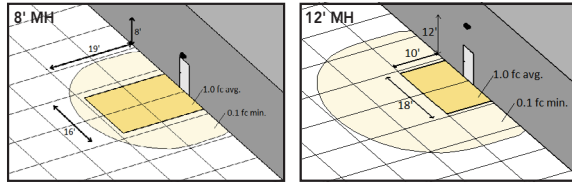

WST LED P1 27K VF MVOLT E7WH

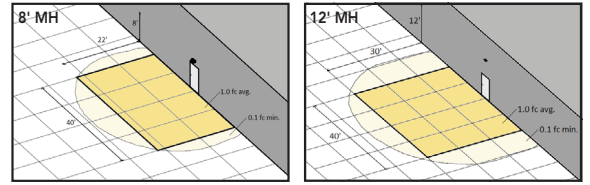

WST LED P2 40K VF MVOLT E20WH

Performance Data

Lumen Output

Lumen values are from photometric tests performed in accordance with IESNA LM-79-08. Data is considered to be representative of the configurations shown, within the tolerances allowed by Lighting Facts.

Performance Package	System Watts (MVOLT [®])	Dist. Type	27K (2700K, 70 CRI)					30K (3000K, 70 CRI)					40K (4000K, 70 CRI)					50K (5000K, 70 CRI)				
			Lumens	B	U	G	LPW	Lumens	B	U	G	LPW	Lumens	B	U	G	LPW	Lumens	B	U	G	LPW
P1	12W	VF	1,494	0	0	0	125	1,529	0	0	0	127	1,639	0	0	0	137	1,639	0	0	0	137
		VW	1,513	0	0	0	126	1,548	0	0	0	129	1,660	0	0	0	138	1,660	0	0	0	138
P2	25W	VF	3,162	1	0	1	126	3,236	1	0	1	129	3,468	1	0	1	139	3,468	1	0	1	139
		VW	3,202	1	0	0	128	3,277	1	0	0	131	3,512	1	0	0	140	3,512	1	0	0	140
P3	50W	VF	6,023	1	0	1	120	6,164	1	0	1	123	6,607	1	0	1	132	6,607	1	0	1	132
		VW	6,100	1	0	1	122	6,242	1	0	1	125	6,691	1	0	1	134	6,691	1	0	1	134

Lumen Ambient Temperature (LAT) Multipliers

Use these factors to determine relative lumen output for average ambient temperatures from 0-40°C (32-104°F).

Ambient		Lumen Multiplier
0°C	32°F	1.03
10°C	50°F	1.02
20°C	68°F	1.01
25°C	77°F	1.00
30°C	86°F	0.99
40°C	104°F	0.98

Electrical Load



Performance package	System Watts	Current (A)					
		120	208	240	277	347	480
P1	11	0.1	0.06	0.05	0.04	---	---
	14	---	---	---	---	0.04	0.03
P1 DS	14	0.12	0.07	0.06	0.06	---	---
P2	25	0.21	0.13	0.11	0.1	---	---
	30	---	---	---	---	0.09	0.06
P2 DS	25	0.21	0.13	0.11	0.1	---	---
P3	50	0.42	0.24	0.21	0.19	---	---
	56	---	---	---	---	0.16	0.12
P3 DS	52	0.43	0.26	0.23	0.21	---	---

Projected LED Lumen Maintenance


Values calculated according to IESNA TM-21-11 methodology and valid up to 40°C.

Operating Hours	0	25,000	50,000	100,000
Lumen Maintenance Factor	1.0	>0.95	>0.92	>0.87

Isofootcandle plots for the WST LED P3 40K VF and VW. Distances are in units of mounting height (10').

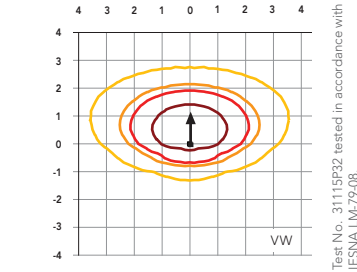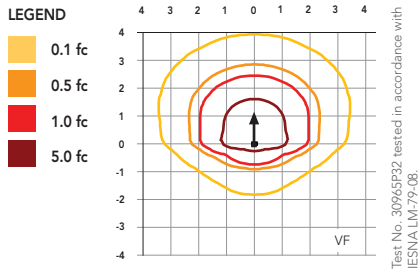

Distribution overlay comparison to 175W metal halide.

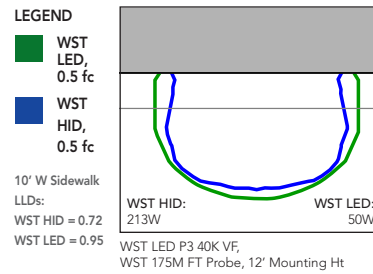

FEATURES & SPECIFICATIONS

INTENDED USE

The classic architectural shape of the WST LED was designed for applications such as hospitals, schools, malls, restaurants, and commercial buildings. The long life LEDs and driver make this luminaire nearly maintenance-free.

CONSTRUCTION

The single-piece die-cast aluminum housing integrates secondary heat sinks to optimize thermal transfer from the internal light engine heat sinks and promote long life. The driver is mounted in direct contact with the casting for a low operating temperature and long life. The die-cast door frame is fully gasketed with a one-piece solid silicone gasket to keep out moisture and dust, providing an IP65 rating for the luminaire.

FINISH

Exterior parts are protected by a zinc-infused Super Durable TGIC thermoset powder coat finish that provides superior resistance to corrosion and weathering. A tightly controlled multi-stage process ensures a minimum 3 mils thickness for a finish that can withstand extreme climate changes without cracking or peeling. Standard Super Durable colors include dark bronze, black, natural aluminum, sandstone and white. Available in textured and non-textured finishes.

OPTICS

Well crafted reflector optics allow the light engine to be recessed within the luminaire, providing visual comfort, superior distribution, uniformity, and spacing in wall-mount applications. The WST LED has zero uplight and qualifies as a Nighttime Friendly™ product, meaning it is consistent with the LEED® and Green Globes™ criteria for eliminating wasteful uplight.

ELECTRICAL

Light engine(s) consist of 98 high-efficacy LEDs mounted to a metal core circuit board and integral aluminum heat sinks to maximize heat dissipation and promote long life (100,000 hrs at 40°C, L87). Class 2 electronic driver has a power factor >90%, THD <20%. Easily-serviceable surge protection device meets a minimum Category B (per ANSI/IEEE C62.41.2).

INSTALLATION

A universal mounting plate with integral mounting support arms allows the fixture to hinge down for easy access while making wiring connections.

LISTINGS

CSA certified to U.S. and Canadian standards. Luminaire is IP65 rated. PIR and back box options are rated for wet location. Rated for -30°C to 40°C ambient.

DesignLights Consortium® (DLC) Premium qualified product. Not all versions of this product may be DLC Premium qualified. Please check the DLC Qualified Products List at www.designlights.org/QPL to confirm which versions are qualified.

WARRANTY

5-year limited warranty. Complete warranty terms located at: www.acuitybrands.com/CustomerResources/Terms_and_conditions.aspx.

Note: Actual performance may differ as a result of end-user environment and application. All values are design or typical values, measured under laboratory conditions at 25 °C. Specifications subject to change without notice.