

DIGITAL NAVIGATION

[Ordering Tree](#) [nLight Platform](#) [Sensor Switch JOT](#) [Photometrics](#) [Performance Data](#) [Drawings](#)

FEATURES & SPECIFICATIONS

INTENDED USE — The EPANL Series LED Edge-Lit Flat Panel provides a fully luminous appearance across the face of the lens. This provides a soft, glare-free solution that is visually comfortable within the space. Suitable for many lighting applications including schools, offices and other commercial spaces, retail, convenience stores, hospitals and healthcare facilities. **Certain airborne contaminants can diminish the integrity of acrylic and/or polycarbonate.** [Click here for Acrylic-Polycarbonate Compatibility table for suitable uses.](#)

CONSTRUCTION — Built to last with an aluminum frame for strength and durability, the seamless frame prevents light leak in the corners. The PMMA light guide plate and lens resists yellowing and transmits light with superior efficacy. The satin white lens provides excellent shielding and fully luminous appearance. EPANL's low-profile design provides increased installation flexibility especially in restricted plenum spaces. The back plate includes integral T-bar clips for installation into 15/16" or 9/16" T-grid ceilings. Fixture may be recessed, suspended, surface box mounted or mounted in a hard-ceiling see accessories section for more information. Fixture may be mounted and wired in continuous rows.

Integrated Sensor (nLight Wired Networking): This sensor is nLight-enabled, meaning it has the ability to communicate over an nLight network. When wired, using CAT-5 cabling, with other nLight-enabled sensors, power packs, or WallPods, an nLight control zone is created. Once linked to a Gateway, directly or via a Bridge, the zone becomes capable of remote status monitoring and control via SensorView software.

Integrated Smart Sensor (nLight Air Wireless Platform): The RES7 sensor is nLight AIR enabled, meaning it has the ability to communicate over the wireless nLight control platform. It is available with an automatic dimming photocell, and either a digital PIR or a microphonics (PDT) dual technology occupancy sensor. It pairs to other luminaires and wall switches through our mobile app, CLAIRITY+, which allows for simple sensor adjustment.

Integrated Wireless Sensor (single room control): Sensor Switch VERTEX JOT or JOTVTX15 luminaire-embedded occupancy and ambient light sensor allows the luminaire to power off when the space is unoccupied or when enough ambient light is entering the space. See page 7 for more details on the integrated wireless sensor.

ELECTRICAL — Long-life LEDs, coupled with a high-efficiency driver, provide superior illumination for extended service life. See page 3 for detailed lumen maintenance information. 0-10V dimming driver, dims to 1% or 10% and contains non-isolated dimming leads.

LISTINGS — CSA Certified to meet US and Canadian standards. Tested to meet UL1958. Intended for indoor use only. Product is not to be stored in non-climate controlled spaces. DesignLights Consortium® (DLC) Premium qualified product and DLC qualified product. Not all versions of this product may be DLC Premium qualified or DLC qualified. Please check the DLC Qualified Products List at www.designlights.org/QPL to confirm which versions are qualified. Damp location listed. IC rated. IP5X rated. Long nomenclature, configurable product is rated for NSF/ANSI Standard 2 - Light Fixture for Splash Zone and Non Food Zone. Tested in accordance with ISO 14644-1; suitable for ISO Class 5-9 positive and negative pressure clean rooms. Suitable for ambient temperatures from 32°F (0°C) to 77°F (25°C).

WARRANTY — 5-year limited warranty. This is the only warranty provided and no other statements in this specification sheet create any warranty of any kind. All other express and implied warranties are disclaimed. Complete warranty terms located at: www.acuitybrands.com/support/warranty/terms-and-conditions

Note: Actual performance may differ as a result of end-user environment and application. All values are design or typical values, measured under laboratory conditions at 25 °C. Specifications subject to change without notice.

Dimensions

| | 1x4 | 2x2 | 2x4 |
|--------|----------|---------|----------|
| Length | 47.72" | 23.70" | 47.72" |
| Width | 11.85" | 23.70" | 23.70" |
| Depth | 2.19" | 2.19" | 2.19" |
| Weight | 13.9 lbs | 7.4 lbs | 15.1 lbs |

* Base configurations; options may add weight

| |
|----------------|
| Catalog Number |
| Notes |
| Type |

EPANL LED

1'x4', 2'x2', and 2'x4'



Embed nLight controls today. Prepare for tomorrow.

| Now | Tomorrow |
|-------------------------|---------------------|
| User-friendly install | Scalability |
| Enhanced energy savings | Space configuration |
| Code compliance | Future-ready |

A+ Capable Luminaire

This item is an A+ capable luminaire, which has been designed and tested to provide consistent color appearance and out-of-the-box control compatibility with simple commissioning.

- All configurations of this luminaire meet the Acuity Brands' specification for chromatic consistency
- This luminaire is part of an A+ Certified solution for nLight® control networks when ordered with drivers marked by a **shaded background***
- This luminaire is part of an A+ Certified solution for nLight control networks, providing advanced control functionality at the luminaire level, when selection includes driver and control options marked by a **shaded background***

To learn more about A+, visit www.acuitybrands.com/aplus.

*See ordering tree for details

EPANL LED Flat Panel



A+ Capable options indicated by this color background.

ORDERING INFORMATION

Example: EPANL 2X4 4000LM 80CRI 35K MIN1 MVOLT E10WCP NLTAIR2 RIO

| Series | Width and Length | Lumens | CRI | Color Temperature | Minimum Dimming Level ‡ | |
|----------------------|--------------------|-------------------------|--------------|--|--|--------------------------------|
| EPANL LED Flat Panel | 1x4 1'x4' | <u>Standard Lumens:</u> | 80CRI 80 CRI | 30K 3000K 35K 3500K 40K 4000K 50K 5000K | MIN10 Dims to 10% ‡ MIN1 Dims to 1% | |
| | | 1500LM 1500 Lumens | | | | <u>High Efficiency Lumens:</u> |
| | | 3000LM 3000 Lumens | | | | 1500LMHE 1500 Lumens |
| | 4000LM 4000 Lumens | 3000LMHE 3000 Lumens | | | | |
| | 4800LM 4800 Lumens | 4000LMHE 4000 Lumens | | | | |
| | 6000LM 6000 Lumens | 4800LMHE 4800 Lumens | | | | |
| | 6000LM 6000 Lumens | 6000LMHE 6000 Lumens | | | | |
| | 2x2 2'x2' | 2000LM 2000 Lumens | | | | 2000LMHE 2000 Lumens |
| | | 3400LM 3400 Lumens | | | | 3400LMHE 3400 Lumens |
| 4000LM 4000 Lumens | | 4000LMHE 4000 Lumens | | | | |
| 4800LM 4800 Lumens | | 4800LMHE 4800 Lumens | | | | |
| 2x4 2'x4' | 3000LM 3000 Lumens | 3000LMHE 3000 Lumens | | | | |
| | 4000LM 4000 Lumens | 4000LMHE 4000 Lumens | | | | |
| | 4800LM 4800 Lumens | 4800LMHE 4800 Lumens | | | | |
| | 5400LM 5400 Lumens | 5400LMHE 5400 Lumens | | | | |
| | 6000LM 6000 Lumens | 6000LMHE 6000 Lumens | | | | |
| | 6800LM 6800 Lumens | 6800LMHE 6800 Lumens | | | | |
| | 7200LM 7200 Lumens | 7200LMHE 7200 Lumens | | | | |

| Dimming ‡ | Voltage | Step Level Dimming | Emergency Option |
|---------------------------|----------------|--------------------------|---|
| ZT Generic 0-10V Dimming | MVOLT 120-277V | (Blank) None | E10WCP EM Self-Diagnostic battery pack, 10W Constant Power, Certified in CA Title 20 MAEDBS ‡ |
| EZT eldoLED 0-10V Dimming | 120 120V | SLD Step Level Dimming ‡ | GTD Generator Transfer Device ‡ |
| DALI eldoLED DALI | 277 277V | | EMG for use with NLIGHT or NLTAIR2 on generator supply EM power ‡ |
| | 347 347V ‡ | | |

| Control Options | | |
|--|--|--|
| Control Input <u>nLight Wired:</u> NLIGHT nLight enabled, no constant lumen management CL80 NLIGHT nLight enabled, constant lumen output 80% | Control <u>nLight Wired: ‡</u> (blank) no control | Individual Control JOT Wireless room control with "Just One Touch" pairing ‡ JOTVTX15 Wireless occupancy sensor with "Just One Touch" pairing ‡ |
| <u>nLight Wireless:</u> NLTAIR2 nLight AIR Generation 2 enabled ‡ | <u>nLight Wireless:</u> RIO nLight AIR Radio module without sensor ‡ RES7 nLight AIR control with PIR integral occupancy sensor and automatic dimming photocell ‡ RES7PDT nLight AIR control with PDT dual technology integral occupancy sensor and automatic dimming photocell ‡ | |

| Options | |
|--|---|
| GLR Fast-blowing fuse ‡ | PWS1856LV 6' pre-wire, 3/8" diameter, 18 gauge, 1 circuit w/low voltage wires ‡ |
| GMF Slow-blowing fuse ‡ | CP Chicago plenum ‡ |
| PWS1836 6' pre-wire, 3/8" diameter, 18 gauge, 1 circuit | NPLT Narrow Pallet |
| PWS1846 6' pre-wire, 3/8" diameter, 18 gauge, 2 circuit | BDP Factory Installed Ballast Disconnect Plug |
| PWS1846 PWSLV Two cables: one 6' pre-wire, 3/8" diameter, 18 gauge, 2 circuits; one 6' pre-wire, 3/8" diameter, 18 gauge ‡ | RRL_ RELOC®-ready luminaire ‡ |

NOTE: ‡ indicates option value has ordering restrictions. Please reference the Option Value Ordering Restrictions chart on the next page. Options are sorted alphanumerically.

EPANL LED Flat Panel

| ‡ Option Value Ordering Restrictions | |
|--------------------------------------|---|
| Option Value | Restriction |
| 347 | Not available with SLD, E10WCP, or GTD options. |
| Dimming | If Step Level Dimming (SLD) or NLIGHT or NLTAIR2 is specified, leave this section blank. |
| CP | Not available with nLight wired (NLIGHT), nLight wireless (NLTAIR2). Not available with PWS1836, PWS1846, PWS1856LV, or PWS1846 PWSLV. |
| E10WCP | Refer to Emergency Battery Estimated Lumen section for lumen estimation. Test Switch must be remote mounted or installed in an adjacent ceiling tile. When using pre-wire option, use PWS1846 or PWS1846 PWSLV. |
| EMG | Requires a connection to existing NLIGHT or NLTAIR2 network. Power is provided from separate nLight enabled fixture. When EMG is combined with NLTAIR2 see UL924 Sequence of Operation Chart on page 4. |
| GLR, GMF | Must specify voltage. 120 or 277, with GLR and GMF fusing. |
| GTD | Not available with JOT, JOTVTX15, sensor options or emergency battery options. Must specify voltage. Requires BSE labeling, voltage specific. Consult factory for options. Example: GTD BSE10. |
| JOT, JOTVTX15 | Not available with NLIGHT, DALI, SLD, GTD, EMG, or NLTAIR2 options. |
| MIN10 | Not available with EZT, NLIGHT or DALI. |
| Minimum Dimming Level | If Step Level Dimming (SLD) is specified, leave this section blank. |
| NLTAIR2 | Only available with MIN1 minimum dimming level option. |
| PWS1846 PWSLV | Not available with GTD, nLight wired, nLight wireless, NLIGHT or NLTAIR2. |
| PWS1856LV | Not available with nLight wired, nLight wireless, NLIGHT, or NLTAIR2. |
| RES7, RES7PDT, RIO | See UL924 Sequence of Operation chart on page 4. Can be used as a normal power sensing device for nLight Air devices and luminaires with EM options. |
| RRL_ | For ordering logic consult RRL 2013 . |
| SLD | Not available with with any nLight Interface, Control options, or GTD. When using prewire option use PWS1846. |

Tunable White (Select SKUs Only)

Available SKUs:

- *2735H0 EPANL 2X2 TUWH PROR 4800LM 80CRI NLT
- *2735H9 EPANL 2X2 TUWH PROR 4800LM 80CRI NLT PWS1836
- *2735HJ EPANL 2X2 TUWH PROR 4800LM 80CRI NLT E10WCP
- *2735HN EPANL 2X2 TUWH PROR 4800LM 80CRI NLT E10WCP PWS1846


Operating Performance:

| Nomenclature | CCT | Lumens | Efficacy | CRI |
|--|------|---------|----------|-------|
| EPANL 2X2 TUWH PROR 4800LM 80CRI NLT @ 3000K | 3105 | 4527.53 | 98.81 | 80.78 |
| EPANL 2X2 TUWH PROR 4800LM 80CRI NLT @ 4000K | 3974 | 4920.24 | 127.2 | 83.85 |
| EPANL 2X2 TUWH PROR 4800LM 80CRI NLT @ 5000K | 4925 | 5004.18 | 123.41 | 82.89 |



Tunable White GPHD

- **Gamut:** One dimensional Warm-Cool
- **Path:** Direct 3000K to 5000K (Productivity Range)
- **Handle:** Two Natural Language Handles: Intensity and CCT
- **Data:** nLight with nTune technology for both handles of control



Mainstream Dynamic Tunable White with nTune Technology: Tunable white nTune™ is an all-digital light color temperature control within an nLight enabled luminaire. This brings tunable white lighting control into the mainstream with repeatable, consistent results in an economical luminaire form and system already familiar to schools. Designers and facility operators are granted the freedom to tie scenes to specific activities or to complement colors or materials within a visual environment. nTune™ allows color temperature settings through the Productivity Range of 3000K-5000K. Refer to the Programming User's Guide for instructions on customizing to your application with SensorView.

Lumen Maintenance:

| EPANL | Reported Lumen Maintenance | Forecasted Lumen Maintenance |
|---------|---|--|
| SE LEDs | L90 @ 41k Hrs / L80 @ >54k Hrs / L70 @ >54k Hrs | L90 @ 41k Hrs / L80 @ 84k Hrs / L70 @ 134k Hrs |
| HE LEDs | L90 @ 44k Hrs / L80 @ >54k Hrs / L70 @ >54k Hrs | L90 @ 44k Hrs / L80 @ 93k Hrs / L70 @ 148k Hrs |

ACCESSORIES

Accessories: Order as separate catalog number.

| | |
|-----------------------|---|
| DGA14 | Drywall grid adapter for 1x4 recessed fixture. |
| DGA22 | Drywall grid adapter for 2x2 recessed fixture. |
| DGA24 | Drywall grid adapter for 2x4 recessed fixture. |
| PANLEM E10WCP BKT CVR | Field installable kit includes 10 watt battery, bracket and cover ¹ |
| PANLEM BKT CVR | Field installable kit bracket and cover only, 10W battery NOT included ¹ |
| 2X2SMKSH | 2'x2' Surface Mount Troffer Kit |
| 2X4SMKSH | 2'x4' Surface Mount Troffer Kit |
| 1X4SMKSH | 1'x4' Surface Mount Troffer Kit |
| BDP U | Field Installable Ballast Disconnect Plug |
| PAC 2DNF 36 | Panel Air Craft Kit, 2 cables with Y splitter, No Power Feed, 36 inches. Recommended for 1X4 or 2X2 Panel Fixtures only. ² |
| PAC 2DF 36 | Panel Air Craft Kit, 2 cables with Y splitter, with Power Feed, 36 inches. Recommended for 1X4 or 2X2 Panel Fixtures only. ^{2,3} |
| PAC 4DNF 36 | Panel Air Craft Kit, 4 cables, No Power Feed, 36 inches. Recommended for 2X4, 1X4 or 2X2 Panel Fixtures. ² |
| PAC 4DF 36 | Panel Air Craft Kit, 4 cables, with Power Feed, 36 inches. Recommended for 2X4, 1X4 or 2X2 Panel Fixtures. ^{2,3} |
| PAC 2DNF 72 | Panel Air Craft Kit, 2 cables with Y splitter, No Power Feed 72 inches. Recommended for 1X4 or 2X2 Panel Fixtures only. ² |
| PAC 2DF 72 | Panel Air Craft Kit, 2 cables with Y splitter, with Power Feed, 72 inches. Recommended for 1X4 or 2X2 Panel Fixtures only. ^{2,3} |
| PAC 4DNF 72 | Panel Air Craft Kit, 4 cables, No Power Feed, 72 inches. Recommended for 2X4, 1X4 or 2X2 Panel Fixtures. ² |
| PAC 4DF 72 | Panel Air Craft Kit, 4 cables, with Power Feed, 72 inches. Recommended for 2X4, 1X4 or 2X2 Panel Fixtures. ^{2,3} |

Emergency Battery Estimated Lumens

Use the formula below to estimate the delivered lumens in emergency mode

Estimated Lumens = 1.25 x P x LPW

P = Output power of emergency driver (10W for PS1055CP)

LPW = Lumen per watt rating of the luminaire.

SMKSH Accessory



Notes:

1. Test switch must be remote mounted or installed in an adjacent ceiling tile.
2. See Suspension Kits section below for additional detail.
3. For MVOLT only, not available with 347V

Emergency Battery Pack Options – Field Installable

| Battery Model Number | Wattage | Runtime (Minutes) | Lumen Output* @ 120 Lumens/Watt | Other |
|----------------------|---------|-------------------|---------------------------------|--------------------------------|
| ILB CP07 2H A | 7W | 120 | 840 | Storm Shelter / 2 Hour Runtime |
| ILB CP10 A | 10W | 90 | 1200 | |
| ILBLP CP10 HE SD A | 10W | 90 | 1200 | Title 20, Self Diagnostic |
| ILBLP CP15 HE SD A | 15W | 90 | 1800 | Title 20, Self Diagnostic |
| ILB CP20 HE A | 20W | 90 | 2400 | Title 20 |
| ILB CP20 HE SD A | 20W | 90 | 2400 | Title 20, Self Diagnostic |

All the above are UL Listed products that are certified for field install external/remote to the fixture.

*Minimum delivered lumen output to assist in product selection for increased fixture mounting height.

The CP10 delivered emergency illumination outperforms legacy 1400 lumen fluorescent emergency ballast.


Please contact us at productsupportemergency@acuitybrands.com for any Emergency Battery related questions.

UL 924 Response – nLight AIR Devices with EM Option

The below information applies to all nLight AIR devices with an EM option.

- EM devices will remain at their high-end trim and ignore wireless lighting control commands, unless a normal-power-sensed (NPS) broadcast is received at least every 8 seconds.
- Using the CLAIRITY+ mobile app, EM devices must be associated with a group that includes a normal power sensing device to receive NPS broadcasts.
- Only non-emergency rPP20, rLSXR, rSBOR, rSDGR, and nLight AIR luminaires with version 3.4 or later firmware can provide normal power sensing for EM devices. See specification sheets for control devices and luminaires for more information on options that support normal power sensing.

Suspension Kits

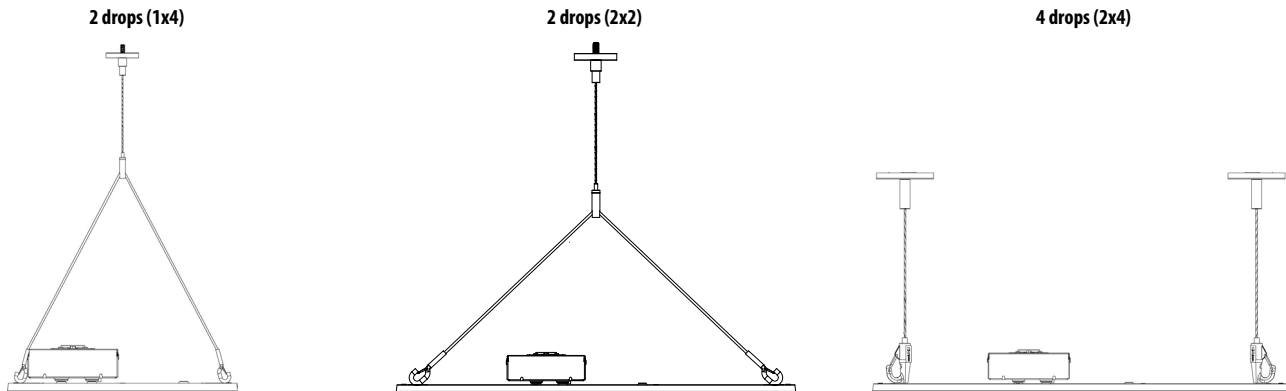


EPANL LED Flat Panel

nLight Platform

| nLight embedded fixtures offer: | Customers get: |
|---|--|
| Manual Dimming | Convenience and visual comfort for occupants |
| Motion Sensing and/or Daylight Harvesting | Energy savings and code compliance |
| Fixture or Group Level Control | Ability to configure lighting to the space requirements |
| Flexibility | Ease of fixture moves, adds and changes |
| Wireless Wall Switch (nLight AIR Only) | Ease and flexibility of placement |
| Astronomical and Time of Day Scheduling | Energy savings and building security |
| Scalable Solution | nLight controls to grow with your business |
| Future-Ready | nLight platform to set foundation for future upgrades and capabilities |

nLight Air Wireless

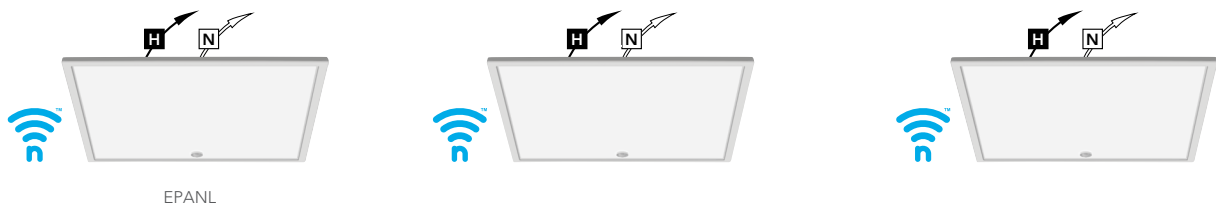


Simple as 1,2,3

1. Install the nLight® AIR fixtures with embedded smart sensor
2. Install the wireless battery-powered wall switch
3. With the CLAIRITY+ Pro app, pair the fixtures with the wall switch and if desired, customize the sensor settings for the desired outcome



nLight Wired Networking

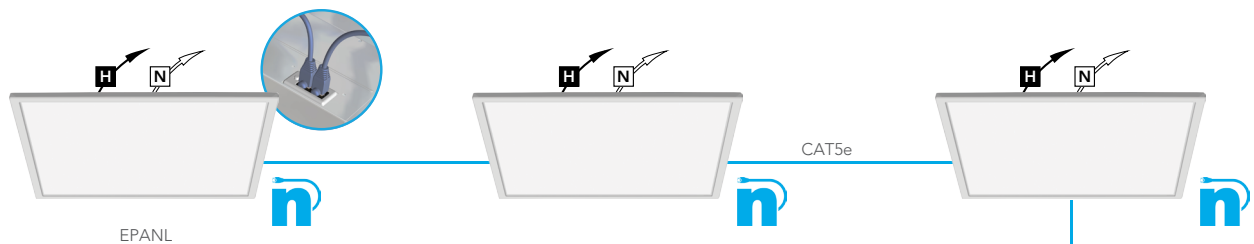

Simple as 1,2,3

1. Install the nLight® Wired fixtures with nIO control
2. Install the nLight Wired wall switch
3. Connect the fixtures using standard CAT5e cables and the devices will automatically discover each other and work (plug and play)





EPANL LED Flat Panel

Controls Accessories

| nLight® Wired Control Accessories: <i>Order as separate catalog number. Visit www.acuitybrands.com/products/controls/nlight.</i> | | | |
|--|---------------------|--|----------------------------|
| WallPod stations | Model number | Occupancy sensors | Model number |
| On/Off | nPODMA [Color] | Small motion 360°, ceiling (PIR / dual tech) | nCM 9 RJB / nCM PDT 9 RJB |
| On/Off & raise/lower | nPODMA DX [Color] | Large motion 360°, ceiling (PIR / dual tech) | nCM10 RJB / nCM PDT 10 RJB |
| Graphic touchscreen | nPOD TOUCH [Color] | Wall switch with raise/lower | nWSX PDT LV DX [color] |
| Photo-cell controls | Model number | Cat-5 cable (plenum rated) | Model number |
| Full range dimming | nCM ADCX RJB | 10' cable | CATS 10FT J1 |
| | | 30' cable | CATS 30FT J1 |

| nLight® AIR Control Accessories: <i>Order as separate catalog number. Visit www.acuitybrands.com/products/controls/nlightair.</i> | |
|--|-------------------------|
| Wall switches | Model number |
| On/Off single pole | rPODBA [color] G2 |
| On/Off two pole | rPODB A2P [color] G2 |
| On/Off & raise/lower single pole | rPODBA DX [color] G2 |
| On/Off & raise/lower two pole | rPODBA 2P DX [color] G2 |

EPANL fixtures with integrated rIO devices complement any small office space. Pair them with an rCMS occupancy sensor and the space now has wireless occupancy sensing and dimming capability. For additional configuration options please consult with Tech Support.

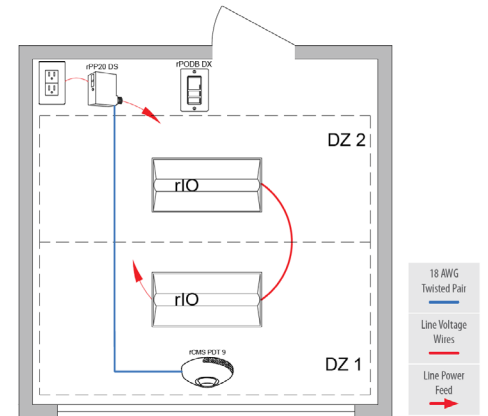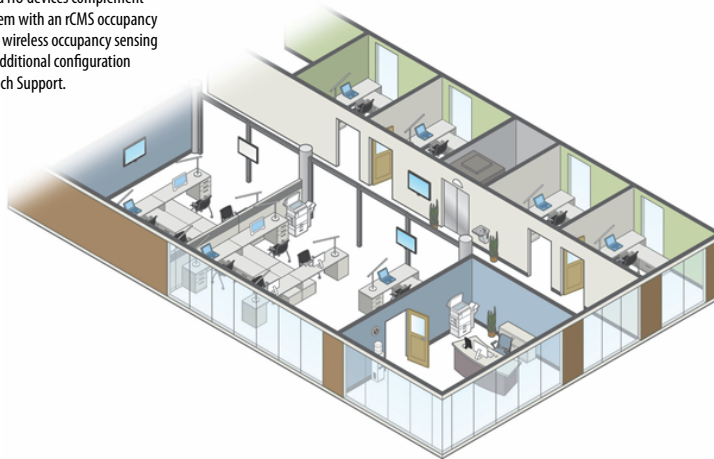

| rCMS ¹ | | Example: RCMS PDT 10 AR G2 | | | | | |
|---|--|---|---|------------------------------------|------------|----------------------------|--|
| Series / Detection | Power Supply ¹ | Occupancy Detection | Lens (Required) | Operating Mode | Generation | | |
| RCMS nLight AIR occupancy and daylight sensor | [blank] Power Supply ordered separately PS 150 Standard 150 mA Power Supply | [blank] PIR Detection PDT Dual Tech PIR/Microphonics | 10 Large Motion/ Extended Range 360° 9 Small Motion/ Extended Range 360° 6 High Bay 360° Lens | [BLANK] None AR Auxiliary Relay | G2 | Generation 2 compatibility | |


Notes

1 RCMS requires low voltage power from either RPP20 DS 24V G2 or PS150.



Sensor Coverage Pattern Mini 360° Lens


- Recommended for walking motion detection from mounting heights between 8 ft (2.44 m) and 20 ft (6.10 m)
- Initial detection of walking motion along sensor axes at distances of 2x the mounting height up to 15 ft (4.57 m) and
- 1.75x up to 20 ft (6.10 m).
- Provides 12 ft (3.66 m) radial detection of small motion when mounted at 9 ft (2.74 m)
- Initial detection will occur earlier when walking across sensor's field of view than when walking directly at sensor

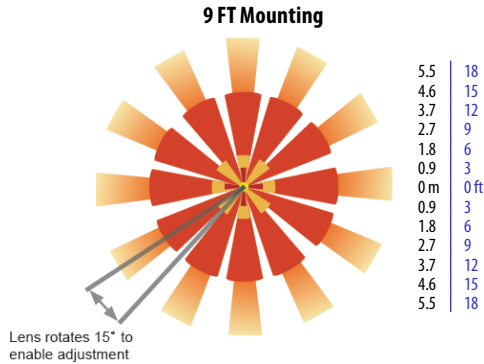

nLight AIR Wireless

nLight AIR is the ideal solution for retrofit or new construction spaces where adding additional wiring can be labor intensive and nLight AIR is available with or without an integral sensor. The integrated rES7 or rES7PDT smart sensors are part of each luminaire in the nLight AIR network, which can be grouped to control multiple luminaires. The granularity of control with the digital PIR occupancy detection and daylight sensing makes a great solution for any application.

Sequence of Operation (nES7 and Sensor)

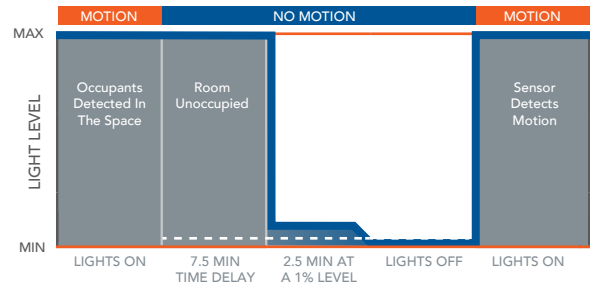

*The presetting on the automatic dimming photocell is 10fc (RES7).


Sensor Switch JOT



Sensor Switch JOT Enabled Wireless Solution

Designed with contractors in mind, the Sensor Switch JOT enabled wireless solution offers a straightforward approach to the installation and pairing of lighting fixtures and controls. Absolutely no 0-10V control wires and no mobile apps are needed with JOT enabled products, allowing for lightning speed installation right out of the box.


- 1. Power:** Install JOT enabled fixtures and controls as instructed.
- 2. Pair:** Insert the pairing tool into the pinhole on the wall switch; press and hold any button for 6 seconds.
- 3. Play:** Once paired, each fixture will individually dim down to 10% brightness. All products will be fully functional.

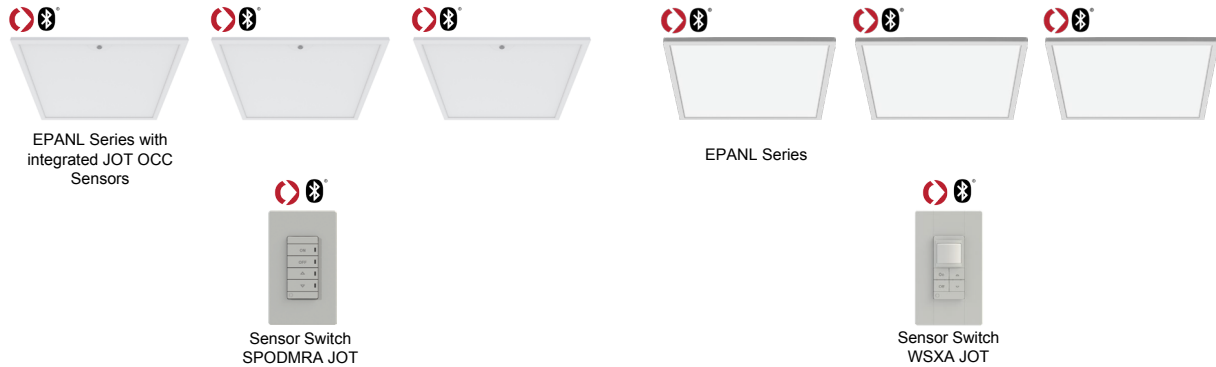


15F - LARGE MOTION EXTENDED RANGE 360

- Optimized full coverage from 8 ft - 15 ft (2.4 m - 4.5 m) mounting heights
- Reliable detection of large motion (e.g. pedestrian walking traffic)
- 1.3 x mounting height equals approximate detection range

TOP VIEW

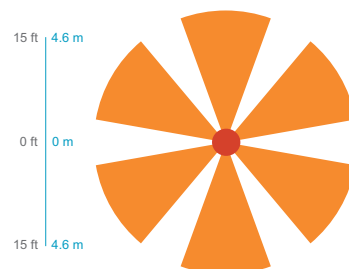

SIDE VIEW

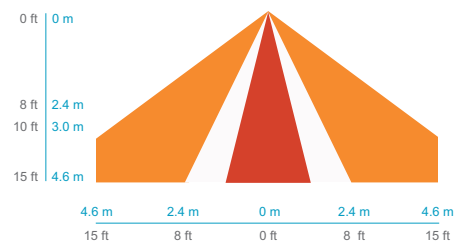

EPANL LED Flat Panel

| Performance Data | | | | | | |
|---|--------------------|--------|-------|-----|----------------|--|
| Model No. | DLC Classification | Lumens | Watts | LPW | DLC Product Id | |
| EPANL 1X4 1500LM 80CRI 30K [MIN1, MIN10] [BLANK, ZT, EZT, NLIGHT] [MVOLT, 120, 277] [ALL OPTIONS] | Standard | 1511 | 14 | 108 | P7WQT2HL | |
| EPANL 1X4 1500LM 80CRI 30K [MVOLT, 120, 277] SLD [ALL OPTIONS] | Standard | 1511 | 14 | 108 | P7U30VTJ | |
| EPANL 1X4 1500LM 80CRI 35K [MIN1, MIN10] [BLANK, ZT, EZT, NLIGHT] [MVOLT, 120, 277] [ALL OPTIONS] | Standard | 1574 | 14 | 113 | P8VKRLEE | |
| EPANL 1X4 1500LM 80CRI 35K [MVOLT, 120, 277] SLD [ALL OPTIONS] | Standard | 1574 | 14 | 113 | P7KC755F | |
| EPANL 1X4 1500LM 80CRI 40K [MIN1, MIN10] [BLANK, ZT, EZT, NLIGHT] [MVOLT, 120, 277] [ALL OPTIONS] | Standard | 1637 | 14 | 117 | PJAP0IUK | |
| EPANL 1X4 1500LM 80CRI 40K [MVOLT, 120, 277] SLD [ALL OPTIONS] | Standard | 1637 | 14 | 117 | P93PN6HF | |
| EPANL 1X4 1500LM 80CRI 50K [MIN1, MIN10] [BLANK, ZT, EZT, NLIGHT] [MVOLT, 120, 277] [ALL OPTIONS] | Standard | 1699 | 14 | 122 | PJ2LT8RF | |
| EPANL 1X4 1500LM 80CRI 50K [MVOLT, 120, 277] SLD [ALL OPTIONS] | Standard | 1699 | 14 | 122 | PMO20WDF | |
| EPANL 1X4 1500LMHE 80CRI 30K [MIN1, MIN10] [BLANK, ZT, EZT, NLIGHT] [MVOLT, 120, 277] [ALL OPTIONS] | Standard | 1419 | 12 | 119 | P783S2UK | |
| EPANL 1X4 1500LMHE 80CRI 30K [MVOLT, 120, 277] SLD [ALL OPTIONS] | Standard | 1419 | 12 | 119 | P08VAI49 | |
| EPANL 1X4 1500LMHE 80CRI 35K [MIN1, MIN10] [BLANK, ZT, EZT, NLIGHT] [MVOLT, 120, 277] [ALL OPTIONS] | Standard | 1457 | 12 | 122 | PJ3S90F | |
| EPANL 1X4 1500LMHE 80CRI 35K [MVOLT, 120, 277] SLD [ALL OPTIONS] | Standard | 1457 | 12 | 122 | PIKV3IEP | |
| EPANL 1X4 1500LMHE 80CRI 40K [MIN1, MIN10] [BLANK, ZT, EZT, NLIGHT] [MVOLT, 120, 277] [ALL OPTIONS] | Premium | 1508 | 12 | 127 | P2S90K19 | |
| EPANL 1X4 1500LMHE 80CRI 40K [MVOLT, 120, 277] SLD [ALL OPTIONS] | Premium | 1508 | 12 | 127 | P66FTD1J | |
| EPANL 1X4 1500LMHE 80CRI 50K [MIN1, MIN10] [BLANK, ZT, EZT, NLIGHT] [MVOLT, 120, 277] [ALL OPTIONS] | Premium | 1543 | 12 | 130 | PD3A291J | |
| EPANL 1X4 1500LMHE 80CRI 50K [MVOLT, 120, 277] SLD [ALL OPTIONS] | Premium | 1543 | 12 | 130 | PW3538GV | |
| EPANL 1X4 3000LM 80CRI 30K [MIN1, MIN10] [BLANK, ZT, EZT, NLIGHT] [MVOLT, 120, 277] [ALL OPTIONS] | Standard | 2841 | 27 | 106 | PEYKSSNY | |
| EPANL 1X4 3000LM 80CRI 30K [MVOLT, 120, 277] SLD [ALL OPTIONS] | Standard | 2841 | 27 | 106 | P7W193ZL | |
| EPANL 1X4 3000LM 80CRI 35K [MIN1, MIN10] [BLANK, ZT, EZT, NLIGHT] [MVOLT, 120, 277] [ALL OPTIONS] | Standard | 2960 | 27 | 110 | PBMB5QA8 | |
| EPANL 1X4 3000LM 80CRI 35K [MVOLT, 120, 277] SLD [ALL OPTIONS] | Standard | 2960 | 27 | 110 | P0HAAAX5 | |
| EPANL 1X4 3000LM 80CRI 40K [MIN1, MIN10] [BLANK, ZT, EZT, NLIGHT] [MVOLT, 120, 277] [ALL OPTIONS] | Standard | 3078 | 27 | 114 | PNKUCIIA | |
| EPANL 1X4 3000LM 80CRI 40K [MVOLT, 120, 277] SLD [ALL OPTIONS] | Standard | 3078 | 27 | 114 | P532WBUF | |
| EPANL 1X4 3000LM 80CRI 50K [MIN1, MIN10] [BLANK, ZT, EZT, NLIGHT] [MVOLT, 120, 277] [ALL OPTIONS] | Standard | 3197 | 27 | 119 | PMHIZSAT | |
| EPANL 1X4 3000LM 80CRI 50K [MVOLT, 120, 277] SLD [ALL OPTIONS] | Standard | 3197 | 27 | 119 | PFZRHYS | |
| EPANL 1X4 3000LMHE 80CRI 30K [MIN1, MIN10] [BLANK, ZT, EZT, NLIGHT] [MVOLT, 120, 277] [ALL OPTIONS] | Standard | 2771 | 23 | 123 | PJY1EF30 | |
| EPANL 1X4 3000LMHE 80CRI 30K [MVOLT, 120, 277] SLD [ALL OPTIONS] | Standard | 2771 | 23 | 123 | P49S17R0 | |
| EPANL 1X4 3000LMHE 80CRI 35K [MIN1, MIN10] [BLANK, ZT, EZT, NLIGHT] [MVOLT, 120, 277] [ALL OPTIONS] | Premium | 2845 | 23 | 126 | PTUGXVMO | |
| EPANL 1X4 3000LMHE 80CRI 35K [MVOLT, 120, 277] SLD [ALL OPTIONS] | Premium | 2845 | 23 | 126 | P61KCZHV | |
| EPANL 1X4 3000LMHE 80CRI 40K [MIN1, MIN10] [BLANK, ZT, EZT, NLIGHT] [MVOLT, 120, 277] [ALL OPTIONS] | Premium | 2945 | 23 | 130 | PIYUQUN8 | |
| EPANL 1X4 3000LMHE 80CRI 40K [MVOLT, 120, 277] SLD [ALL OPTIONS] | Premium | 2945 | 23 | 130 | PJZRVW5F | |
| EPANL 1X4 3000LMHE 80CRI 50K [MIN1, MIN10] [BLANK, ZT, EZT, NLIGHT] [MVOLT, 120, 277] [ALL OPTIONS] | Premium | 3012 | 23 | 133 | P0ATZ94T | |
| EPANL 1X4 3000LMHE 80CRI 50K [MVOLT, 120, 277] SLD [ALL OPTIONS] | Premium | 3012 | 23 | 133 | PT45WGFZ | |
| EPANL 1X4 4000LMHE 80CRI 40K [MIN1, MIN10] [BLANK, ZT, EZT, NLIGHT] 347 [ALL OPTIONS] | Standard | 3426 | 31 | 111 | PSWWJZ98 | |
| EPANL 1X4 4000LM 80CRI 40K [MIN1, MIN10] [BLANK, ZT, EZT, NLIGHT] [MVOLT, 120, 277] [ALL OPTIONS] | Standard | 3963 | 37 | 107 | P7MFGP4R | |
| EPANL 1X4 4000LM 80CRI 40K [MVOLT, 120, 277] SLD [ALL OPTIONS] | Standard | 3963 | 37 | 107 | PQ0H0HMOH | |
| EPANL 1X4 4000LM 80CRI 50K [MIN1, MIN10] [BLANK, ZT, EZT, NLIGHT] [MVOLT, 120, 277] [ALL OPTIONS] | Standard | 4116 | 37 | 111 | P78MM627 | |
| EPANL 1X4 4000LM 80CRI 50K [MVOLT, 120, 277] SLD [ALL OPTIONS] | Standard | 4116 | 37 | 111 | P3XBCGJO | |
| EPANL 1X4 4000LMHE 80CRI 30K [MIN1, MIN10] [BLANK, ZT, EZT, NLIGHT] [MVOLT, 120, 277] [ALL OPTIONS] | Standard | 3667 | 31 | 120 | PKNCN1T4 | |
| EPANL 1X4 4000LMHE 80CRI 30K [MVOLT, 120, 277] SLD [ALL OPTIONS] | Standard | 3667 | 31 | 120 | PDWGL65K | |
| EPANL 1X4 4000LMHE 80CRI 35K [MIN1, MIN10] [BLANK, ZT, EZT, NLIGHT] [MVOLT, 120, 277] [ALL OPTIONS] | Standard | 3765 | 31 | 123 | PJZ17EWI | |
| EPANL 1X4 4000LMHE 80CRI 35K [MVOLT, 120, 277] SLD [ALL OPTIONS] | Standard | 3765 | 31 | 123 | P4L0LVRG | |
| EPANL 1X4 4000LMHE 80CRI 40K [MIN1, MIN10] [BLANK, ZT, EZT, NLIGHT] [MVOLT, 120, 277] [ALL OPTIONS] | Premium | 3897 | 31 | 128 | P2GUZR2U | |
| EPANL 1X4 4000LMHE 80CRI 40K [MVOLT, 120, 277] SLD [ALL OPTIONS] | Premium | 3897 | 31 | 128 | PY7QZBWI | |
| EPANL 1X4 4000LMHE 80CRI 50K [MIN1, MIN10] [BLANK, ZT, EZT, NLIGHT] [MVOLT, 120, 277] [ALL OPTIONS] | Premium | 3985 | 31 | 130 | PD4J8B83 | |
| EPANL 1X4 4000LMHE 80CRI 50K [MVOLT, 120, 277] SLD [ALL OPTIONS] | Premium | 3985 | 31 | 130 | PELAOSTB | |
| EPANL 1X4 4800LM 80CRI 30K [MIN1, MIN10] [BLANK, ZT, EZT, NLIGHT] [MVOLT, 120, 277] [ALL OPTIONS] | Standard | 4633 | 45 | 104 | PII6VKUP | |
| EPANL 1X4 4800LM 80CRI 30K [MVOLT, 120, 277] SLD [ALL OPTIONS] | Standard | 4633 | 45 | 104 | PKJ028DR | |
| EPANL 1X4 4800LM 80CRI 35K [MIN1, MIN10] [BLANK, ZT, EZT, NLIGHT] [MVOLT, 120, 277] [ALL OPTIONS] | Standard | 4807 | 45 | 108 | P716D3WI | |
| EPANL 1X4 4800LM 80CRI 35K [MVOLT, 120, 277] SLD [ALL OPTIONS] | Standard | 4807 | 45 | 108 | PJ87LC64 | |
| EPANL 1X4 4800LM 80CRI 40K [MIN1, MIN10] [BLANK, ZT, EZT, NLIGHT] [MVOLT, 120, 277] [ALL OPTIONS] | Standard | 4923 | 45 | 110 | PICIQWDG | |
| EPANL 1X4 4800LM 80CRI 40K [MVOLT, 120, 277] SLD [ALL OPTIONS] | Standard | 4923 | 45 | 110 | PZW1PDFZ | |
| EPANL 1X4 4800LM 80CRI 50K [MIN1, MIN10] [BLANK, ZT, EZT, NLIGHT] [MVOLT, 120, 277] [ALL OPTIONS] | Standard | 4967 | 45 | 111 | PQAFPPJ6 | |
| EPANL 1X4 4800LM 80CRI 50K [MVOLT, 120, 277] SLD [ALL OPTIONS] | Standard | 4967 | 45 | 111 | PCNBYZMO | |
| EPANL 1X4 4800LMHE 80CRI 30K [MIN1, MIN10] [BLANK, ZT, EZT, NLIGHT] [MVOLT, 120, 277] [ALL OPTIONS] | Standard | 4340 | 37 | 117 | PU1UIMS5B | |
| EPANL 1X4 4800LMHE 80CRI 30K [MVOLT, 120, 277] SLD [ALL OPTIONS] | Standard | 4340 | 37 | 117 | PNSWOKZ3 | |
| EPANL 1X4 4800LMHE 80CRI 35K [MIN1, MIN10] [BLANK, ZT, EZT, NLIGHT] [MVOLT, 120, 277] [ALL OPTIONS] | Standard | 4456 | 37 | 120 | POBHX07V | |
| EPANL 1X4 4800LMHE 80CRI 35K [MVOLT, 120, 277] SLD [ALL OPTIONS] | Standard | 4456 | 37 | 120 | P07FGWK3 | |
| EPANL 1X4 4800LMHE 80CRI 40K [MIN1, MIN10] [BLANK, ZT, EZT, NLIGHT] [MVOLT, 120, 277] [ALL OPTIONS] | Premium | 4612 | 37 | 124 | PHAPQJ5 | |
| EPANL 1X4 4800LMHE 80CRI 40K [MVOLT, 120, 277] SLD [ALL OPTIONS] | Premium | 4612 | 37 | 124 | PZ9DDI8L | |
| EPANL 1X4 4800LMHE 80CRI 50K [MIN1, MIN10] [BLANK, ZT, EZT, NLIGHT] [MVOLT, 120, 277] [ALL OPTIONS] | Premium | 4717 | 37 | 127 | PLOV456F | |
| EPANL 1X4 4800LMHE 80CRI 50K [MVOLT, 120, 277] SLD [ALL OPTIONS] | Premium | 4717 | 37 | 127 | PJIAJOSO | |
| EPANL 1X4 5400LMHE 80CRI 30K [MIN1, MIN10] [BLANK, ZT, EZT, NLIGHT] [MVOLT, 120, 277] [ALL OPTIONS] | Standard | 5156 | 44 | 116 | PKIB75K | |
| EPANL 1X4 5400LMHE 80CRI 30K [MVOLT, 120, 277] SLD [ALL OPTIONS] | Standard | 5156 | 44 | 116 | PC2IS9KU | |
| EPANL 1X4 5400LMHE 80CRI 35K [MIN1, MIN10] [BLANK, ZT, EZT, NLIGHT] [MVOLT, 120, 277] [ALL OPTIONS] | Standard | 5272 | 44 | 119 | PNX0E6ZR | |
| EPANL 1X4 5400LMHE 80CRI 35K [MVOLT, 120, 277] SLD [ALL OPTIONS] | Standard | 5272 | 44 | 119 | PE4NWEOC | |
| EPANL 1X4 5400LMHE 80CRI 40K [MIN1, MIN10] [BLANK, ZT, EZT, NLIGHT] [MVOLT, 120, 277] [ALL OPTIONS] | Premium | 5490 | 44 | 124 | PFOB5KQD | |

EPANL LED Flat Panel

| Performance Data | | | | | |
|---|--------------------|--------|-------|-----|----------------|
| Model No. | DLC Classification | Lumens | Watts | LPW | DLC Product Id |
| EPANL 1X4 5400LMHE 80CRI 40K [MVOLT, 120, 277] SLD [ALL OPTIONS] | Premium | 5490 | 44 | 124 | PVWVBOJI |
| EPANL 1X4 5400LMHE 80CRI 50K [MIN1, MIN10] [BLANK, ZT, EZT, NLIGHT] [MVOLT, 120, 277] [ALL OPTIONS] | Premium | 5665 | 44 | 128 | PECOGL65 |
| EPANL 1X4 5400LMHE 80CRI 50K [MVOLT, 120, 277] SLD [ALL OPTIONS] | Premium | 5665 | 44 | 128 | P7PAYNFS |
| EPANL 1X4 6000LM 80CRI 30K [BLANK, ZT, EZT, NLIGHT] 347 [ALL OPTIONS] | Standard | 5953 | 55 | 109 | P84A41CZ |
| EPANL 1X4 6000LM 80CRI 30K [MIN1, MIN10] [BLANK, ZT, EZT, NLIGHT] [MVOLT, 120, 277] [ALL OPTIONS] | Standard | 5953 | 51 | 117 | PL3AU798 |
| EPANL 1X4 6000LM 80CRI 30K [MVOLT, 120, 277] SLD [ALL OPTIONS] | Standard | 5953 | 51 | 117 | PCMNH26U |
| EPANL 1X4 6000LM 80CRI 35K [BLANK, ZT, EZT, NLIGHT] 347 [ALL OPTIONS] | Standard | 5997 | 55 | 110 | PWJ6HVP3 |
| EPANL 1X4 6000LM 80CRI 35K [MIN1, MIN10] [BLANK, ZT, EZT, NLIGHT] [MVOLT, 120, 277] [ALL OPTIONS] | Standard | 5997 | 51 | 118 | P31GEZNP |
| EPANL 1X4 6000LM 80CRI 35K [MVOLT, 120, 277] SLD [ALL OPTIONS] | Standard | 5997 | 51 | 118 | P9MS2F1Z |
| EPANL 1X4 6000LM 80CRI 40K [BLANK, ZT, EZT, NLIGHT] 347 [ALL OPTIONS] | Standard | 6171 | 55 | 113 | PD7JL7CS |
| EPANL 1X4 6000LM 80CRI 40K [MIN1, MIN10] [BLANK, ZT, EZT, NLIGHT] [MVOLT, 120, 277] [ALL OPTIONS] | Standard | 6171 | 51 | 121 | PECOZVXY |
| EPANL 1X4 6000LM 80CRI 40K [MVOLT, 120, 277] SLD [ALL OPTIONS] | Standard | 6171 | 51 | 121 | PRC6VIDH |
| EPANL 1X4 6000LM 80CRI 50K [BLANK, ZT, EZT, NLIGHT] 347 [ALL OPTIONS] | Standard | 6240 | 55 | 114 | P206CKX4 |
| EPANL 1X4 6000LM 80CRI 50K [MIN1, MIN10] [BLANK, ZT, EZT, NLIGHT] [MVOLT, 120, 277] [ALL OPTIONS] | Standard | 6240 | 51 | 123 | PSBGKZ54 |
| EPANL 1X4 6000LM 80CRI 50K [MVOLT, 120, 277] SLD [ALL OPTIONS] | Standard | 6240 | 51 | 123 | PEVMDG8B |
| EPANL 2X2 2000LM 80CRI 30K [MIN1, MIN10] [BLANK, ZT, EZT, NLIGHT] [MVOLT, 120, 277] [ALL OPTIONS] | Standard | 1988 | 19 | 106 | P084CQTR |
| EPANL 2X2 2000LM 80CRI 30K [MVOLT, 120, 277] SLD [ALL OPTIONS] | Standard | 1988 | 19 | 106 | PN6WT230 |
| EPANL 2X2 2000LM 80CRI 35K [MIN1, MIN10] [BLANK, ZT, EZT, NLIGHT] [MVOLT, 120, 277] [ALL OPTIONS] | Standard | 2071 | 19 | 110 | P4AJOG1I |
| EPANL 2X2 2000LM 80CRI 35K [MVOLT, 120, 277] SLD [ALL OPTIONS] | Standard | 2071 | 19 | 110 | P4YZ508D |
| EPANL 2X2 2000LM 80CRI 40K [MIN1, MIN10] [BLANK, ZT, EZT, NLIGHT] [MVOLT, 120, 277] [ALL OPTIONS] | Standard | 2154 | 19 | 115 | PIQUALNF |
| EPANL 2X2 2000LM 80CRI 40K [MVOLT, 120, 277] SLD [ALL OPTIONS] | Standard | 2154 | 19 | 115 | PULQ3DQ4 |
| EPANL 2X2 2000LM 80CRI 50K [MIN1, MIN10] [BLANK, ZT, EZT, NLIGHT] [MVOLT, 120, 277] [ALL OPTIONS] | Standard | 2237 | 19 | 119 | P167DCJS |
| EPANL 2X2 2000LM 80CRI 50K [MVOLT, 120, 277] SLD [ALL OPTIONS] | Standard | 2237 | 19 | 119 | P1FNCFUQ |
| EPANL 2X2 2000LMHE 80CRI 30K [MIN1, MIN10] [BLANK, ZT, EZT, NLIGHT] [MVOLT, 120, 277] [ALL OPTIONS] | Standard | 1856 | 16 | 119 | P8MIUS1X |
| EPANL 2X2 2000LMHE 80CRI 30K [MVOLT, 120, 277] SLD [ALL OPTIONS] | Standard | 1856 | 16 | 119 | PRXPVWQJ |
| EPANL 2X2 2000LMHE 80CRI 35K [MIN1, MIN10] [BLANK, ZT, EZT, NLIGHT] [MVOLT, 120, 277] [ALL OPTIONS] | Standard | 1906 | 16 | 123 | PU253KEZ |
| EPANL 2X2 2000LMHE 80CRI 35K [MVOLT, 120, 277] SLD [ALL OPTIONS] | Standard | 1906 | 16 | 123 | PLNY5ZF6 |
| EPANL 2X2 2000LMHE 80CRI 40K [MIN1, MIN10] [BLANK, ZT, EZT, NLIGHT] [MVOLT, 120, 277] [ALL OPTIONS] | Premium | 1972 | 16 | 127 | PZSES31J |
| EPANL 2X2 2000LMHE 80CRI 40K [MVOLT, 120, 277] SLD [ALL OPTIONS] | Premium | 1972 | 16 | 127 | PZKK20D4 |
| EPANL 2X2 2000LMHE 80CRI 50K [MIN1, MIN10] [BLANK, ZT, EZT, NLIGHT] [MVOLT, 120, 277] [ALL OPTIONS] | Premium | 2017 | 16 | 130 | PCLAME02 |
| EPANL 2X2 2000LMHE 80CRI 50K [MVOLT, 120, 277] SLD [ALL OPTIONS] | Premium | 2017 | 16 | 130 | PVOMYAQV |
| EPANL 2X2 3400LM 80CRI 30K [MIN1, MIN10] [BLANK, ZT, EZT, NLIGHT] [MVOLT, 120, 277] [ALL OPTIONS] | Standard | 3291 | 30 | 109 | PNSQZLMI |
| EPANL 2X2 3400LM 80CRI 30K [MVOLT, 120, 277] SLD [ALL OPTIONS] | Standard | 3291 | 30 | 109 | PU14CBM6 |
| EPANL 2X2 3400LM 80CRI 35K [MIN1, MIN10] [BLANK, ZT, EZT, NLIGHT] [MVOLT, 120, 277] [ALL OPTIONS] | Standard | 3428 | 30 | 113 | PMKTPC52 |
| EPANL 2X2 3400LM 80CRI 35K [MVOLT, 120, 277] SLD [ALL OPTIONS] | Standard | 3428 | 30 | 113 | PB1DW61J |
| EPANL 2X2 3400LM 80CRI 40K [MIN1, MIN10] [BLANK, ZT, EZT, NLIGHT] [MVOLT, 120, 277] [ALL OPTIONS] | Standard | 3566 | 30 | 118 | PWRHGEH4 |
| EPANL 2X2 3400LM 80CRI 40K [MIN1, MIN10] [BLANK, ZT, EZT, NLIGHT] 347 [ALL OPTIONS] | Standard | 3566 | 33 | 107 | PS9YYBOV |
| EPANL 2X2 3400LM 80CRI 40K [MVOLT, 120, 277] SLD [ALL OPTIONS] | Standard | 3566 | 30 | 118 | PG7KBSGU |
| EPANL 2X2 3400LM 80CRI 50K [MIN1, MIN10] [BLANK, ZT, EZT, NLIGHT] [MVOLT, 120, 277] [ALL OPTIONS] | Standard | 3703 | 30 | 122 | PL6024K5 |
| EPANL 2X2 3400LM 80CRI 50K [MVOLT, 120, 277] SLD [ALL OPTIONS] | Standard | 3703 | 30 | 122 | PP79GBQH |
| EPANL 2X2 3400LMHE 80CRI 30K [MIN1, MIN10] [BLANK, ZT, EZT, NLIGHT] [MVOLT, 120, 277] [ALL OPTIONS] | Standard | 3198 | 27 | 121 | P25A54VV |
| EPANL 2X2 3400LMHE 80CRI 30K [MVOLT, 120, 277] SLD [ALL OPTIONS] | Standard | 3198 | 27 | 121 | PZENR7ML |
| EPANL 2X2 3400LMHE 80CRI 35K [MIN1, MIN10] [BLANK, ZT, EZT, NLIGHT] [MVOLT, 120, 277] [ALL OPTIONS] | Standard | 3285 | 27 | 124 | PC28H7F3 |
| EPANL 2X2 3400LMHE 80CRI 35K [MVOLT, 120, 277] SLD [ALL OPTIONS] | Standard | 3285 | 27 | 124 | PGPCX23Z |
| EPANL 2X2 3400LMHE 80CRI 40K [MIN1, MIN10] [BLANK, ZT, EZT, NLIGHT] [MVOLT, 120, 277] [ALL OPTIONS] | Premium | 3399 | 27 | 128 | PWGICRXA |
| EPANL 2X2 3400LMHE 80CRI 40K [MVOLT, 120, 277] SLD [ALL OPTIONS] | Premium | 3399 | 27 | 128 | PZQGNSEF |
| EPANL 2X2 3400LMHE 80CRI 50K [MIN1, MIN10] [BLANK, ZT, EZT, NLIGHT] [MVOLT, 120, 277] [ALL OPTIONS] | Premium | 3477 | 27 | 131 | P57KW7H4 |
| EPANL 2X2 3400LMHE 80CRI 50K [MVOLT, 120, 277] SLD [ALL OPTIONS] | Premium | 3477 | 27 | 131 | PDS56JBH |
| EPANL 2X2 4000LM 80CRI 40K [MIN1, MIN10] [BLANK, ZT, EZT, NLIGHT] [MVOLT, 120, 277] [ALL OPTIONS] | Standard | 4121 | 37 | 110 | P5L7HREA |
| EPANL 2X2 4000LM 80CRI 40K [MVOLT, 120, 277] SLD [ALL OPTIONS] | Standard | 4121 | 37 | 110 | PP2PR06A |
| EPANL 2X2 4000LM 80CRI 50K [MIN1, MIN10] [BLANK, ZT, EZT, NLIGHT] [MVOLT, 120, 277] [ALL OPTIONS] | Standard | 4280 | 37 | 114 | P94H4XFG |
| EPANL 2X2 4000LM 80CRI 50K [MVOLT, 120, 277] SLD [ALL OPTIONS] | Standard | 4280 | 37 | 114 | PFQOF3LM |
| EPANL 2X2 4000LMHE 80CRI 30K [MIN1, MIN10] [BLANK, ZT, EZT, NLIGHT] [MVOLT, 120, 277] [ALL OPTIONS] | Standard | 3874 | 33 | 118 | PTN8M36S |
| EPANL 2X2 4000LMHE 80CRI 30K [MVOLT, 120, 277] SLD [ALL OPTIONS] | Standard | 3874 | 33 | 118 | PXW23VVD |
| EPANL 2X2 4000LMHE 80CRI 35K [MIN1, MIN10] [BLANK, ZT, EZT, NLIGHT] [MVOLT, 120, 277] [ALL OPTIONS] | Standard | 3978 | 33 | 121 | P566L1UU |
| EPANL 2X2 4000LMHE 80CRI 35K [MVOLT, 120, 277] SLD [ALL OPTIONS] | Standard | 3978 | 33 | 121 | PG06EXAT |
| EPANL 2X2 4000LMHE 80CRI 40K [MIN1, MIN10] [BLANK, ZT, EZT, NLIGHT] [MVOLT, 120, 277] [ALL OPTIONS] | Premium | 4117 | 33 | 125 | PDJJEZV9 |
| EPANL 2X2 4000LMHE 80CRI 40K [MVOLT, 120, 277] SLD [ALL OPTIONS] | Premium | 4117 | 33 | 125 | P8BAID21 |
| EPANL 2X2 4000LMHE 80CRI 50K [MIN1, MIN10] [BLANK, ZT, EZT, NLIGHT] [MVOLT, 120, 277] [ALL OPTIONS] | Premium | 4211 | 33 | 128 | P3P7W4AB |
| EPANL 2X2 4000LMHE 80CRI 50K [MVOLT, 120, 277] SLD [ALL OPTIONS] | Premium | 4211 | 33 | 128 | PQCCGU60 |
| EPANL 2X2 4800LM 80CRI 40K [MIN1, MIN10] [BLANK, ZT, EZT, NLIGHT] [MVOLT, 120, 277] [ALL OPTIONS] | Standard | 4843 | 45 | 109 | P00Y8N2Z |
| EPANL 2X2 4800LM 80CRI 40K [MVOLT, 120, 277] SLD [ALL OPTIONS] | Standard | 4843 | 45 | 109 | P89V8XNL |
| EPANL 2X2 4800LM 80CRI 50K [MIN1, MIN10] [BLANK, ZT, EZT, NLIGHT] [MVOLT, 120, 277] [ALL OPTIONS] | Standard | 4886 | 45 | 110 | PW25Y5X9 |
| EPANL 2X2 4800LM 80CRI 50K [MVOLT, 120, 277] SLD [ALL OPTIONS] | Standard | 4886 | 45 | 110 | PAAAM27H |
| EPANL 2X2 4800LMHE 80CRI 30K [MIN1, MIN10] [BLANK, ZT, EZT, NLIGHT] [MVOLT, 120, 277] [ALL OPTIONS] | Standard | 4420 | 36 | 121 | PFYMYFE0 |
| EPANL 2X2 4800LMHE 80CRI 30K [MVOLT, 120, 277] SLD [ALL OPTIONS] | Standard | 4420 | 36 | 121 | PX02EX68 |
| EPANL 2X2 4800LMHE 80CRI 35K [MIN1, MIN10] [BLANK, ZT, EZT, NLIGHT] [MVOLT, 120, 277] [ALL OPTIONS] | Premium | 4539 | 36 | 125 | PZ0PLM19 |
| EPANL 2X2 4800LMHE 80CRI 35K [MVOLT, 120, 277] SLD [ALL OPTIONS] | Premium | 4539 | 36 | 125 | PF2L9X2I |

EPANL LED Flat Panel

| Performance Data | | | | | |
|---|--------------------|--------|-------|-----|----------------|
| Model No. | DLC Classification | Lumens | Watts | LPW | DLC Product Id |
| EPANL 2X2 4800LMHE 80CRI 40K [MIN1, MIN10] [BLANK, ZT, EZT, NLIGHT] [MVOLT, 120, 277] [ALL OPTIONS] | Premium | 4697 | 36 | 129 | PNQ40WFF |
| EPANL 2X2 4800LMHE 80CRI 40K [MVOLT, 120, 277] SLD [ALL OPTIONS] | Premium | 4697 | 36 | 129 | P2NS3VB0 |
| EPANL 2X2 4800LMHE 80CRI 50K [MIN1, MIN10] [BLANK, ZT, EZT, NLIGHT] [MVOLT, 120, 277] [ALL OPTIONS] | Premium | 4804 | 36 | 132 | PG3ZCKUI |
| EPANL 2X2 4800LMHE 80CRI 50K [MVOLT, 120, 277] SLD [ALL OPTIONS] | Premium | 4804 | 36 | 132 | PNDDOXI4 |
| EPANL 2X4 3000LM 80CRI 30K [MIN1, MIN10] [BLANK, ZT, EZT, NLIGHT] [MVOLT, 120, 277] [ALL OPTIONS] | Standard | 3015 | 29 | 106 | PGB293WJ |
| EPANL 2X4 3000LM 80CRI 30K [MVOLT, 120, 277] SLD [ALL OPTIONS] | Standard | 3015 | 29 | 106 | PXWRSANS |
| EPANL 2X4 3000LM 80CRI 35K [MIN1, MIN10] [BLANK, ZT, EZT, NLIGHT] [MVOLT, 120, 277] [ALL OPTIONS] | Standard | 3141 | 29 | 110 | PJ32L41S |
| EPANL 2X4 3000LM 80CRI 35K [MVOLT, 120, 277] SLD [ALL OPTIONS] | Standard | 3141 | 29 | 110 | PWJKJ91G |
| EPANL 2X4 3000LM 80CRI 40K [MIN1, MIN10] [BLANK, ZT, EZT, NLIGHT] [MVOLT, 120, 277] [ALL OPTIONS] | Standard | 3266 | 29 | 115 | PVIRS0QB |
| EPANL 2X4 3000LM 80CRI 40K [MVOLT, 120, 277] SLD [ALL OPTIONS] | Standard | 3266 | 29 | 115 | PPQP99LT |
| EPANL 2X4 3000LM 80CRI 50K [MIN1, MIN10] [BLANK, ZT, EZT, NLIGHT] [MVOLT, 120, 277] [ALL OPTIONS] | Standard | 3392 | 29 | 119 | P4H3UGFQ |
| EPANL 2X4 3000LM 80CRI 50K [MVOLT, 120, 277] SLD [ALL OPTIONS] | Standard | 3392 | 29 | 119 | PLI4CPSN |
| EPANL 2X4 3000LMHE 80CRI 30K [MIN1, MIN10] [BLANK, ZT, EZT, NLIGHT] [MVOLT, 120, 277] [ALL OPTIONS] | Premium | 2943 | 23 | 129 | PHDE0RE3 |
| EPANL 2X4 3000LMHE 80CRI 30K [MVOLT, 120, 277] SLD [ALL OPTIONS] | Premium | 2943 | 23 | 129 | PYUNOTIN |
| EPANL 2X4 3000LMHE 80CRI 35K [MIN1, MIN10] [BLANK, ZT, EZT, NLIGHT] [MVOLT, 120, 277] [ALL OPTIONS] | Premium | 2986 | 23 | 131 | P2GQ1ISA |
| EPANL 2X4 3000LMHE 80CRI 35K [MVOLT, 120, 277] SLD [ALL OPTIONS] | Premium | 2986 | 23 | 131 | PC230I10 |
| EPANL 2X4 3000LMHE 80CRI 40K [MIN1, MIN10] [BLANK, ZT, EZT, NLIGHT] [MVOLT, 120, 277] [ALL OPTIONS] | Premium | 3071 | 23 | 135 | PNWQLGKR |
| EPANL 2X4 3000LMHE 80CRI 40K [MVOLT, 120, 277] SLD [ALL OPTIONS] | Premium | 3071 | 23 | 135 | P3C1956W |
| EPANL 2X4 3000LMHE 80CRI 50K [MIN1, MIN10] [BLANK, ZT, EZT, NLIGHT] [MVOLT, 120, 277] [ALL OPTIONS] | Premium | 3114 | 23 | 137 | PIIH40FQ |
| EPANL 2X4 3000LMHE 80CRI 50K [MVOLT, 120, 277] SLD [ALL OPTIONS] | Premium | 3114 | 23 | 137 | PEQ9TWNV |
| EPANL 2X4 3760LMHE 80CRI 40K MIN10 ZT MVOLT NACV | Premium | 3984 | 27 | 147 | PQMBSPAR |
| EPANL 2X4 4000LM 80CRI 30K [MIN1, MIN10] [BLANK, ZT, EZT, NLIGHT] [MVOLT, 120, 277] [ALL OPTIONS] | Standard | 3914 | 38 | 104 | PLDIMHXG |
| EPANL 2X4 4000LM 80CRI 30K [MVOLT, 120, 277] SLD [ALL OPTIONS] | Standard | 3914 | 38 | 104 | P01K0BJN |
| EPANL 2X4 4000LM 80CRI 35K [MIN1, MIN10] [BLANK, ZT, EZT, NLIGHT] [MVOLT, 120, 277] [ALL OPTIONS] | Standard | 4077 | 38 | 108 | PPTL71HY |
| EPANL 2X4 4000LM 80CRI 35K [MVOLT, 120, 277] SLD [ALL OPTIONS] | Standard | 4077 | 38 | 108 | PRO2E004 |
| EPANL 2X4 4000LM 80CRI 40K [MIN1, MIN10] [BLANK, ZT, EZT, NLIGHT] [MVOLT, 120, 277] [ALL OPTIONS] | Standard | 4240 | 38 | 113 | PT1H08CF |
| EPANL 2X4 4000LM 80CRI 40K [MVOLT, 120, 277] SLD [ALL OPTIONS] | Standard | 4240 | 38 | 113 | PGSERWDA |
| EPANL 2X4 4000LM 80CRI 50K [MIN1, MIN10] [BLANK, ZT, EZT, NLIGHT] [MVOLT, 120, 277] [ALL OPTIONS] | Standard | 4403 | 38 | 117 | P8TD4A4V |
| EPANL 2X4 4000LM 80CRI 50K [MVOLT, 120, 277] SLD [ALL OPTIONS] | Standard | 4403 | 38 | 117 | PTXVJNOI |
| EPANL 2X4 4000LMHE 80CRI 30K [MIN1, MIN10] [BLANK, ZT, EZT, NLIGHT] [MVOLT, 120, 277] [ALL OPTIONS] | Premium | 3874 | 31 | 123 | P8R62RB3 |
| EPANL 2X4 4000LMHE 80CRI 30K [MVOLT, 120, 277] SLD [ALL OPTIONS] | Premium | 3874 | 31 | 123 | P23T8ZYA |
| EPANL 2X4 4000LMHE 80CRI 35K [MIN1, MIN10] [BLANK, ZT, EZT, NLIGHT] [MVOLT, 120, 277] [ALL OPTIONS] | Premium | 3930 | 31 | 125 | PIY82204 |
| EPANL 2X4 4000LMHE 80CRI 35K [MVOLT, 120, 277] SLD [ALL OPTIONS] | Premium | 3930 | 31 | 125 | P5KW17RT |
| EPANL 2X4 4000LMHE 80CRI 40K [MIN1, MIN10] [BLANK, ZT, EZT, NLIGHT] [MVOLT, 120, 277] [ALL OPTIONS] | Premium | 4042 | 31 | 129 | PPU6PYNE |
| EPANL 2X4 4000LMHE 80CRI 40K [MVOLT, 120, 277] SLD [ALL OPTIONS] | Premium | 4042 | 31 | 129 | P9VND0DS |
| EPANL 2X4 4000LMHE 80CRI 50K [MIN1, MIN10] [BLANK, ZT, EZT, NLIGHT] [MVOLT, 120, 277] [ALL OPTIONS] | Premium | 4098 | 31 | 130 | PTRH2WMJ |
| EPANL 2X4 4000LMHE 80CRI 50K [MVOLT, 120, 277] SLD [ALL OPTIONS] | Premium | 4098 | 31 | 130 | P55XJ12N |
| EPANL 2X4 4800LM 80CRI 30K [MIN1, MIN10] [BLANK, ZT, EZT, NLIGHT] [MVOLT, 120, 277] [ALL OPTIONS] | Standard | 4817 | 45 | 107 | P2B2XRG3 |
| EPANL 2X4 4800LM 80CRI 30K [MVOLT, 120, 277] SLD [ALL OPTIONS] | Standard | 4817 | 45 | 107 | PHYFIN9C |
| EPANL 2X4 4800LM 80CRI 35K [MIN1, MIN10] [BLANK, ZT, EZT, NLIGHT] [MVOLT, 120, 277] [ALL OPTIONS] | Standard | 4998 | 45 | 111 | P4PI9UFW |
| EPANL 2X4 4800LM 80CRI 35K [MVOLT, 120, 277] SLD [ALL OPTIONS] | Standard | 4998 | 45 | 111 | PI2A3L85 |
| EPANL 2X4 4800LM 80CRI 40K [MIN1, MIN10] [BLANK, ZT, EZT, NLIGHT] [MVOLT, 120, 277] [ALL OPTIONS] | Standard | 5119 | 45 | 113 | P4SKVRJP |
| EPANL 2X4 4800LM 80CRI 40K [MVOLT, 120, 277] SLD [ALL OPTIONS] | Standard | 5119 | 45 | 113 | P018HM99 |
| EPANL 2X4 4800LM 80CRI 50K [MIN1, MIN10] [BLANK, ZT, EZT, NLIGHT] [MVOLT, 120, 277] [ALL OPTIONS] | Standard | 5164 | 45 | 114 | PG2MH0ZE |
| EPANL 2X4 4800LM 80CRI 50K [MIN1, MIN10] [BLANK, ZT, EZT, NLIGHT] 347 [ALL OPTIONS] | Standard | 5164 | 48 | 107 | P70IOAPR |
| EPANL 2X4 4800LM 80CRI 50K [MVOLT, 120, 277] SLD [ALL OPTIONS] | Standard | 5164 | 45 | 114 | PWTS0A5Q |
| EPANL 2X4 4800LMHE 80CRI 30K [MIN1, MIN10] [BLANK, ZT, EZT, NLIGHT] [MVOLT, 120, 277] [ALL OPTIONS] | Standard | 4491 | 37 | 120 | P3RF62H6 |
| EPANL 2X4 4800LMHE 80CRI 30K [MVOLT, 120, 277] SLD [ALL OPTIONS] | Standard | 4491 | 37 | 120 | POC36ESU |
| EPANL 2X4 4800LMHE 80CRI 35K [MIN1, MIN10] [BLANK, ZT, EZT, NLIGHT] [MVOLT, 120, 277] [ALL OPTIONS] | Standard | 4612 | 37 | 123 | PYK5A8HX |
| EPANL 2X4 4800LMHE 80CRI 35K [MVOLT, 120, 277] SLD [ALL OPTIONS] | Standard | 4612 | 37 | 123 | PYWZDYOR |
| EPANL 2X4 4800LMHE 80CRI 40K [MIN1, MIN10] [BLANK, ZT, EZT, NLIGHT] [MVOLT, 120, 277] [ALL OPTIONS] | Premium | 4773 | 37 | 127 | P47Q1RYT |
| EPANL 2X4 4800LMHE 80CRI 40K [MVOLT, 120, 277] SLD [ALL OPTIONS] | Premium | 4773 | 37 | 127 | PH0QXWON |
| EPANL 2X4 4800LMHE 80CRI 50K [MIN1, MIN10] [BLANK, ZT, EZT, NLIGHT] [MVOLT, 120, 277] [ALL OPTIONS] | Premium | 4882 | 37 | 130 | PR3IS1I0 |
| EPANL 2X4 4800LMHE 80CRI 50K [MVOLT, 120, 277] SLD [ALL OPTIONS] | Premium | 4882 | 37 | 130 | PKP1XLJT |
| EPANL 2X4 5000LMHE 80CRI 40K MIN10 ZT MVOLT NACV | Premium | 5218 | 37 | 141 | PL4K1XE5 |
| EPANL 2X4 5400LM 80CRI 30K [MIN1, MIN10] [BLANK, ZT, EZT, NLIGHT] [MVOLT, 120, 277] [ALL OPTIONS] | Standard | 5345 | 49 | 109 | POS68XSR |
| EPANL 2X4 5400LM 80CRI 30K [MVOLT, 120, 277] SLD [ALL OPTIONS] | Standard | 5345 | 49 | 109 | P00696LI |
| EPANL 2X4 5400LM 80CRI 35K [MIN1, MIN10] [BLANK, ZT, EZT, NLIGHT] [MVOLT, 120, 277] [ALL OPTIONS] | Standard | 5546 | 49 | 113 | PFCL1300 |
| EPANL 2X4 5400LM 80CRI 35K [MVOLT, 120, 277] SLD [ALL OPTIONS] | Standard | 5546 | 49 | 113 | PK7Q1VHH |
| EPANL 2X4 5400LM 80CRI 40K [MIN1, MIN10] [BLANK, ZT, EZT, NLIGHT] [MVOLT, 120, 277] [ALL OPTIONS] | Standard | 5679 | 49 | 116 | PR3K6SHH |
| EPANL 2X4 5400LM 80CRI 40K [MVOLT, 120, 277] SLD [ALL OPTIONS] | Standard | 5679 | 49 | 116 | P8KYWF8W |
| EPANL 2X4 5400LM 80CRI 50K [MIN1, MIN10] [BLANK, ZT, EZT, NLIGHT] [MVOLT, 120, 277] [ALL OPTIONS] | Standard | 5730 | 49 | 117 | PVKKX9GJ |
| EPANL 2X4 5400LM 80CRI 50K [MVOLT, 120, 277] SLD [ALL OPTIONS] | Standard | 5730 | 49 | 117 | PX1YH6FH |
| EPANL 2X4 5400LMHE 80CRI 30K [MIN1, MIN10] [BLANK, ZT, EZT, NLIGHT] [MVOLT, 120, 277] [ALL OPTIONS] | Premium | 5302 | 41 | 131 | P3JOACOV |
| EPANL 2X4 5400LMHE 80CRI 30K [MIN1, MIN10] [BLANK, ZT, EZT, NLIGHT] 347 [ALL OPTIONS] | Premium | 5302 | 41 | 128 | PNWXLX3 |
| EPANL 2X4 5400LMHE 80CRI 30K [MVOLT, 120, 277] SLD [ALL OPTIONS] | Premium | 5302 | 41 | 131 | PARJN9JC |
| EPANL 2X4 5400LMHE 80CRI 35K [MIN1, MIN10] [BLANK, ZT, EZT, NLIGHT] [MVOLT, 120, 277] [ALL OPTIONS] | Premium | 5421 | 41 | 134 | P4E4JYPW |
| EPANL 2X4 5400LMHE 80CRI 35K [MIN1, MIN10] [BLANK, ZT, EZT, NLIGHT] 347 [ALL OPTIONS] | Premium | 5421 | 41 | 131 | PPKAF154 |

EPANL LED Flat Panel


| Performance Data | | | | | |
|---|--------------------|--------|-------|-----|----------------|
| Model No. | DLC Classification | Lumens | Watts | LPW | DLC Product Id |
| EPANL 2X4 5400LMHE 80CRI 35K [MVOLT, 120, 277] SLD [ALL OPTIONS] | Premium | 5421 | 41 | 134 | PBVWKM6 |
| EPANL 2X4 5400LMHE 80CRI 40K [MIN1, MIN10] [BLANK, ZT, EZT, NLIGHT] [MVOLT, 120, 277] [ALL OPTIONS] | Premium | 5645 | 41 | 139 | PWCONHMM |
| EPANL 2X4 5400LMHE 80CRI 40K [MIN1, MIN10] [BLANK, ZT, EZT, NLIGHT] 347 [ALL OPTIONS] | Premium | 5645 | 41 | 137 | PZRLJ13L |
| EPANL 2X4 5400LMHE 80CRI 40K [MVOLT, 120, 277] SLD [ALL OPTIONS] | Premium | 5645 | 41 | 139 | PAHJYVRW |
| EPANL 2X4 5400LMHE 80CRI 50K [MIN1, MIN10] [BLANK, ZT, EZT, NLIGHT] [MVOLT, 120, 277] [ALL OPTIONS] | Premium | 5825 | 41 | 144 | PKG7XHY |
| EPANL 2X4 5400LMHE 80CRI 50K [MIN1, MIN10] [BLANK, ZT, EZT, NLIGHT] 347 [ALL OPTIONS] | Premium | 5825 | 41 | 141 | P367S8NK |
| EPANL 2X4 5400LMHE 80CRI 50K [MVOLT, 120, 277] SLD [ALL OPTIONS] | Premium | 5825 | 41 | 144 | P215I059 |
| EPANL 2X4 5757LMHE 80CRI 40K MIN10 ZT MVOLT NACV | Premium | 5776 | 40 | 143 | P71Q69QD |
| EPANL 2X4 6000LM 80CRI 30K [MIN1, MIN10] [BLANK, ZT, EZT, NLIGHT] [MVOLT, 120, 277] [ALL OPTIONS] | Premium | 6318 | 50 | 126 | PD2QM1LA |
| EPANL 2X4 6000LM 80CRI 30K [MVOLT, 120, 277] SLD [ALL OPTIONS] | Premium | 6318 | 50 | 126 | P32NF8NU |
| EPANL 2X4 6000LM 80CRI 35K [MIN1, MIN10] [BLANK, ZT, EZT, NLIGHT] [MVOLT, 120, 277] [ALL OPTIONS] | Premium | 6364 | 50 | 127 | PSV30WTFM |
| EPANL 2X4 6000LM 80CRI 35K [MIN1, MIN10] [BLANK, ZT, EZT, NLIGHT] 347 [ALL OPTIONS] | Standard | 6364 | 55 | 115 | P89SURCD |
| EPANL 2X4 6000LM 80CRI 35K [MVOLT, 120, 277] SLD [ALL OPTIONS] | Premium | 6364 | 50 | 127 | POK759Q3 |
| EPANL 2X4 6000LM 80CRI 40K [MIN1, MIN10] [BLANK, ZT, EZT, NLIGHT] [MVOLT, 120, 277] [ALL OPTIONS] | Premium | 6548 | 50 | 131 | PWVK6LER |
| EPANL 2X4 6000LM 80CRI 40K [MVOLT, 120, 277] SLD [ALL OPTIONS] | Premium | 6548 | 50 | 131 | PHWCR0VH |
| EPANL 2X4 6000LM 80CRI 50K [MIN1, MIN10] [BLANK, ZT, EZT, NLIGHT] [MVOLT, 120, 277] [ALL OPTIONS] | Premium | 6622 | 50 | 132 | PQMRLFRM |
| EPANL 2X4 6000LM 80CRI 50K [MVOLT, 120, 277] SLD [ALL OPTIONS] | Premium | 6622 | 50 | 132 | PSF8NN00 |
| EPANL 2X4 6000LMHE 80CRI 30K [MIN1, MIN10] [BLANK, ZT, EZT, NLIGHT] [MVOLT, 120, 277] [ALL OPTIONS] | Premium | 5755 | 43 | 135 | P6JUAFCl |
| EPANL 2X4 6000LMHE 80CRI 30K [MIN1, MIN10] [BLANK, ZT, EZT, NLIGHT] 347 [ALL OPTIONS] | Premium | 5755 | 45 | 128 | PDDV7MOA |
| EPANL 2X4 6000LMHE 80CRI 30K [MVOLT, 120, 277] SLD [ALL OPTIONS] | Premium | 5755 | 43 | 135 | POJ81Q95 |
| EPANL 2X4 6000LMHE 80CRI 35K [MIN1, MIN10] [BLANK, ZT, EZT, NLIGHT] [MVOLT, 120, 277] [ALL OPTIONS] | Premium | 5884 | 43 | 138 | PENZU105 |
| EPANL 2X4 6000LMHE 80CRI 35K [MIN1, MIN10] [BLANK, ZT, EZT, NLIGHT] 347 [ALL OPTIONS] | Premium | 5884 | 45 | 131 | PIVHYPPi |
| EPANL 2X4 6000LMHE 80CRI 35K [MVOLT, 120, 277] SLD [ALL OPTIONS] | Premium | 5884 | 43 | 138 | PKFFWFCU |
| EPANL 2X4 6000LMHE 80CRI 40K [MIN1, MIN10] [BLANK, ZT, EZT, NLIGHT] [MVOLT, 120, 277] [ALL OPTIONS] | Premium | 6127 | 43 | 144 | P2GV0FOB |
| EPANL 2X4 6000LMHE 80CRI 40K [MIN1, MIN10] [BLANK, ZT, EZT, NLIGHT] 347 [ALL OPTIONS] | Premium | 6127 | 45 | 136 | PBOA5LE2 |
| EPANL 2X4 6000LMHE 80CRI 40K [MVOLT, 120, 277] SLD [ALL OPTIONS] | Premium | 6127 | 43 | 144 | PAO4TV01 |
| EPANL 2X4 6000LMHE 80CRI 50K [MIN1, MIN10] [BLANK, ZT, EZT, NLIGHT] [MVOLT, 120, 277] [ALL OPTIONS] | Premium | 6322 | 43 | 148 | PZZYBV55 |
| EPANL 2X4 6000LMHE 80CRI 50K [MIN1, MIN10] [BLANK, ZT, EZT, NLIGHT] 347 [ALL OPTIONS] | Premium | 6322 | 45 | 140 | P888TMSU |
| EPANL 2X4 6000LMHE 80CRI 50K [MVOLT, 120, 277] SLD [ALL OPTIONS] | Premium | 6322 | 43 | 148 | PXP5CMGA |
| EPANL 2X4 6800LM 80CRI 30K [MIN1, MIN10] [BLANK, ZT, EZT, NLIGHT] [MVOLT, 120, 277] [ALL OPTIONS] | Standard | 7013 | 62 | 113 | PW2KT9FQ |
| EPANL 2X4 6800LM 80CRI 30K [MVOLT, 120, 277] SLD [ALL OPTIONS] | Standard | 7013 | 62 | 113 | PBEOWDCQ |
| EPANL 2X4 6800LM 80CRI 35K [MIN1, MIN10] [BLANK, ZT, EZT, NLIGHT] [MVOLT, 120, 277] [ALL OPTIONS] | Standard | 7064 | 62 | 114 | PW0040LR |
| EPANL 2X4 6800LM 80CRI 35K [MVOLT, 120, 277] SLD [ALL OPTIONS] | Standard | 7064 | 62 | 114 | P7ALFH3K |
| EPANL 2X4 6800LM 80CRI 40K [MIN1, MIN10] [BLANK, ZT, EZT, NLIGHT] [MVOLT, 120, 277] [ALL OPTIONS] | Standard | 7269 | 62 | 117 | P8FFEBQH |
| EPANL 2X4 6800LM 80CRI 40K [MIN1, MIN10] [BLANK, ZT, EZT, NLIGHT] 347 [ALL OPTIONS] | Standard | 7269 | 65 | 111 | PSLOA6G7 |
| EPANL 2X4 6800LM 80CRI 40K [MVOLT, 120, 277] SLD [ALL OPTIONS] | Standard | 7269 | 62 | 117 | PIUM942B |
| EPANL 2X4 6800LM 80CRI 50K [MIN1, MIN10] [BLANK, ZT, EZT, NLIGHT] [MVOLT, 120, 277] [ALL OPTIONS] | Standard | 7351 | 62 | 118 | PCMKG05N |
| EPANL 2X4 6800LM 80CRI 50K [MVOLT, 120, 277] SLD [ALL OPTIONS] | Standard | 7351 | 62 | 118 | P9AP1VBW |
| EPANL 2X4 6800LMHE 80CRI 30K [MIN1, MIN10] [BLANK, ZT, EZT, NLIGHT] [MVOLT, 120, 277] [ALL OPTIONS] | Premium | 6450 | 48 | 135 | PTT9MBX1 |
| EPANL 2X4 6800LMHE 80CRI 30K [MVOLT, 120, 277] SLD [ALL OPTIONS] | Premium | 6450 | 48 | 135 | PNHSDDD2 |
| EPANL 2X4 6800LMHE 80CRI 35K [MIN1, MIN10] [BLANK, ZT, EZT, NLIGHT] [MVOLT, 120, 277] [ALL OPTIONS] | Premium | 6596 | 48 | 138 | PICAPAMD |
| EPANL 2X4 6800LMHE 80CRI 35K [MVOLT, 120, 277] SLD [ALL OPTIONS] | Premium | 6596 | 48 | 138 | PHA6TVBP |
| EPANL 2X4 6800LMHE 80CRI 40K [MIN1, MIN10] [BLANK, ZT, EZT, NLIGHT] [MVOLT, 120, 277] [ALL OPTIONS] | Premium | 6868 | 48 | 144 | P8IULOJ1 |
| EPANL 2X4 6800LMHE 80CRI 40K [MVOLT, 120, 277] SLD [ALL OPTIONS] | Premium | 6868 | 48 | 144 | P7786UM0 |
| EPANL 2X4 6800LMHE 80CRI 50K [MIN1, MIN10] [BLANK, ZT, EZT, NLIGHT] [MVOLT, 120, 277] [ALL OPTIONS] | Premium | 7086 | 48 | 149 | PUZ5XKJQ |
| EPANL 2X4 6800LMHE 80CRI 50K [MVOLT, 120, 277] SLD [ALL OPTIONS] | Premium | 7086 | 48 | 149 | PMBCA46YK |
| EPANL 2X4 7200LM 80CRI 30K [MIN1, MIN10] [BLANK, ZT, EZT, NLIGHT] [MVOLT, 120, 277] [ALL OPTIONS] | Standard | 7388 | 66 | 111 | P2QQIV0K |
| EPANL 2X4 7200LM 80CRI 30K [MIN1, MIN10] [BLANK, ZT, EZT, NLIGHT] 347 [ALL OPTIONS] | Standard | 7388 | 70 | 106 | PF1S18JE |
| EPANL 2X4 7200LM 80CRI 30K [MVOLT, 120, 277] SLD [ALL OPTIONS] | Standard | 7388 | 66 | 111 | P2GTCW3J |
| EPANL 2X4 7200LM 80CRI 35K [MIN1, MIN10] [BLANK, ZT, EZT, NLIGHT] [MVOLT, 120, 277] [ALL OPTIONS] | Standard | 7442 | 66 | 112 | PCRM0D2R |
| EPANL 2X4 7200LM 80CRI 35K [MIN1, MIN10] [BLANK, ZT, EZT, NLIGHT] 347 [ALL OPTIONS] | Standard | 7442 | 70 | 107 | PKVV7048 |
| EPANL 2X4 7200LM 80CRI 35K [MVOLT, 120, 277] SLD [ALL OPTIONS] | Standard | 7442 | 66 | 112 | P4IRL2HS |
| EPANL 2X4 7200LM 80CRI 40K [MIN1, MIN10] [BLANK, ZT, EZT, NLIGHT] [MVOLT, 120, 277] [ALL OPTIONS] | Standard | 7657 | 66 | 115 | PS2AC19A |
| EPANL 2X4 7200LM 80CRI 40K [MIN1, MIN10] [BLANK, ZT, EZT, NLIGHT] 347 [ALL OPTIONS] | Standard | 7657 | 70 | 110 | PBV78YXA |
| EPANL 2X4 7200LM 80CRI 40K [MVOLT, 120, 277] SLD [ALL OPTIONS] | Standard | 7657 | 66 | 115 | PCLJ4VZN |
| EPANL 2X4 7200LM 80CRI 50K [MIN1, MIN10] [BLANK, ZT, EZT, NLIGHT] [MVOLT, 120, 277] [ALL OPTIONS] | Standard | 7744 | 66 | 117 | PIS28TOX |
| EPANL 2X4 7200LM 80CRI 50K [MIN1, MIN10] [BLANK, ZT, EZT, NLIGHT] 347 [ALL OPTIONS] | Standard | 7744 | 70 | 111 | PSPB7FBG |
| EPANL 2X4 7200LM 80CRI 50K [MVOLT, 120, 277] SLD [ALL OPTIONS] | Standard | 7744 | 66 | 117 | PIRQA8L6 |
| EPANL 2X4 7200LMHE 80CRI 30K [MIN1, MIN10] [BLANK, ZT, EZT, NLIGHT] [MVOLT, 120, 277] [ALL OPTIONS] | Premium | 6792 | 50 | 137 | PJN0UK7J |
| EPANL 2X4 7200LMHE 80CRI 30K [MVOLT, 120, 277] SLD [ALL OPTIONS] | Premium | 6792 | 50 | 137 | PW92GBXR |
| EPANL 2X4 7200LMHE 80CRI 35K [MIN1, MIN10] [BLANK, ZT, EZT, NLIGHT] [MVOLT, 120, 277] [ALL OPTIONS] | Premium | 6945 | 50 | 140 | PHWEYLOD |
| EPANL 2X4 7200LMHE 80CRI 35K [MVOLT, 120, 277] SLD [ALL OPTIONS] | Premium | 6945 | 50 | 140 | PXHH12RI |
| EPANL 2X4 7200LMHE 80CRI 40K [MIN1, MIN10] [BLANK, ZT, EZT, NLIGHT] [MVOLT, 120, 277] [ALL OPTIONS] | Premium | 7232 | 50 | 146 | PW3RZAGO |
| EPANL 2X4 7200LMHE 80CRI 40K [MVOLT, 120, 277] SLD [ALL OPTIONS] | Premium | 7232 | 50 | 146 | PZY6WXJT |
| EPANL 2X4 7200LMHE 80CRI 50K [MIN1, MIN10] [BLANK, ZT, EZT, NLIGHT] [MVOLT, 120, 277] [ALL OPTIONS] | Premium | 7462 | 50 | 151 | PPYDM8D6 |
| EPANL 2X4 7200LMHE 80CRI 50K [MVOLT, 120, 277] SLD [ALL OPTIONS] | Premium | 7462 | 50 | 151 | P7IGKCWE |

EPANL LED Flat Panel


PHOTOMETRICS

Full Photometric data is available on Lithonia.acuitybrands.com


EPANL 2x2 4000LM 80CRI 40K, 4121 delivered lumens.

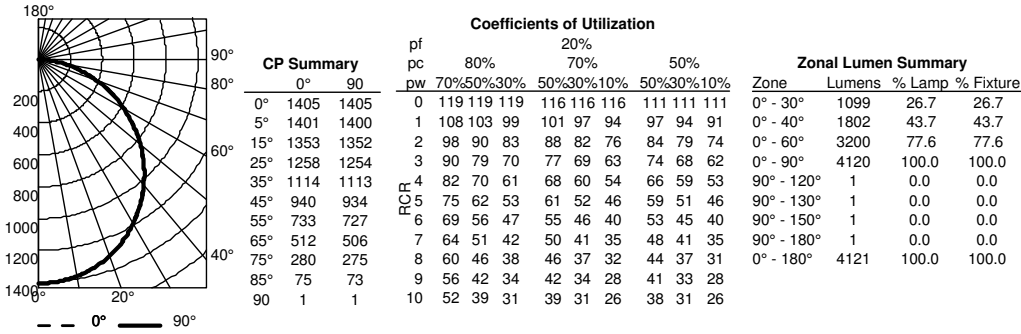

EPANL 2x4 4800LM 80CRI 40K, 5119 delivered lumens.

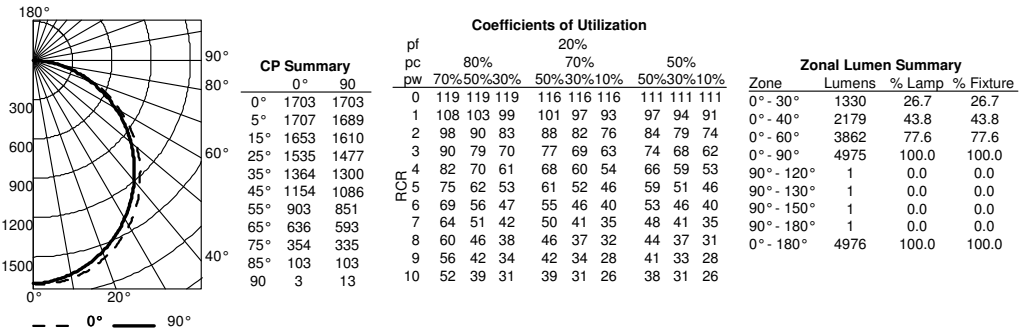


EPANL 2x4 6800LM 80CRI 40K, 7269 delivered lumens.

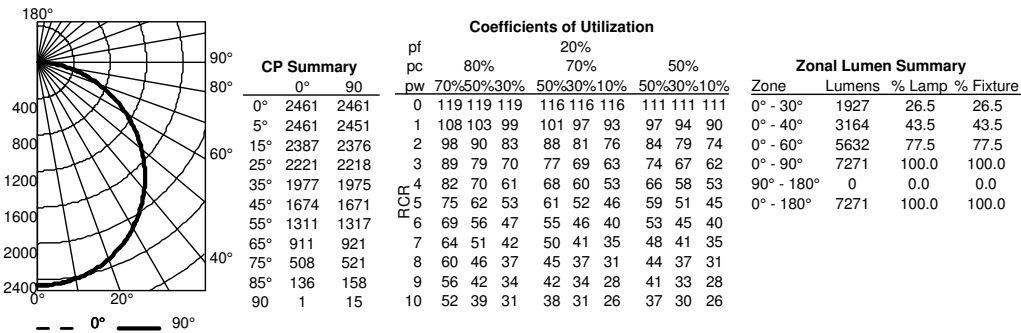


DIMENSIONS

1X4 Configurations

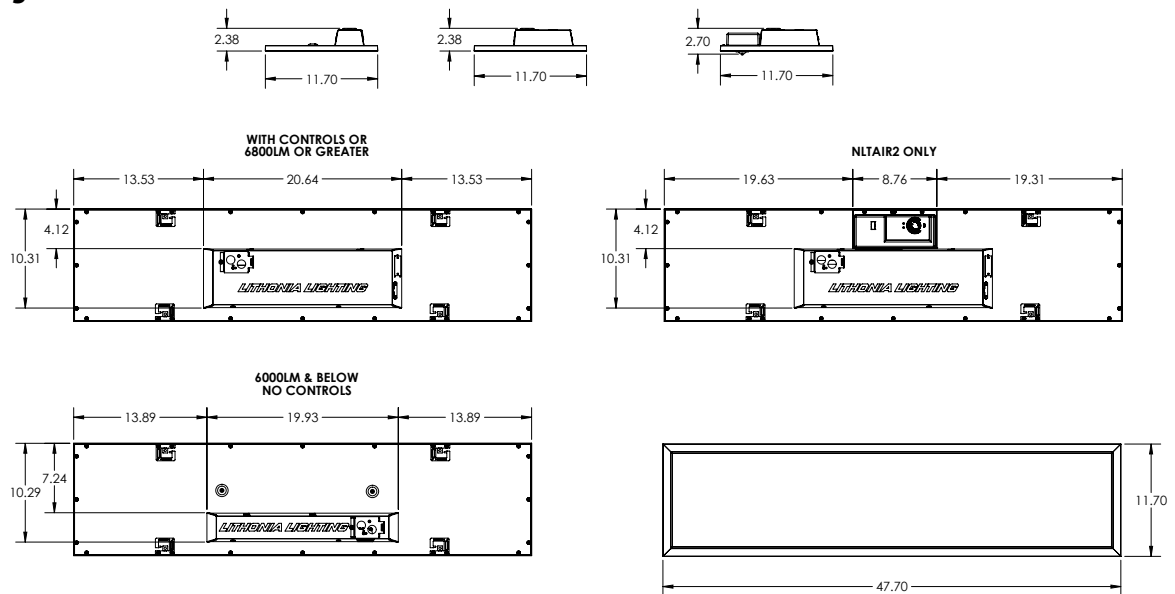

2X2 Configurations

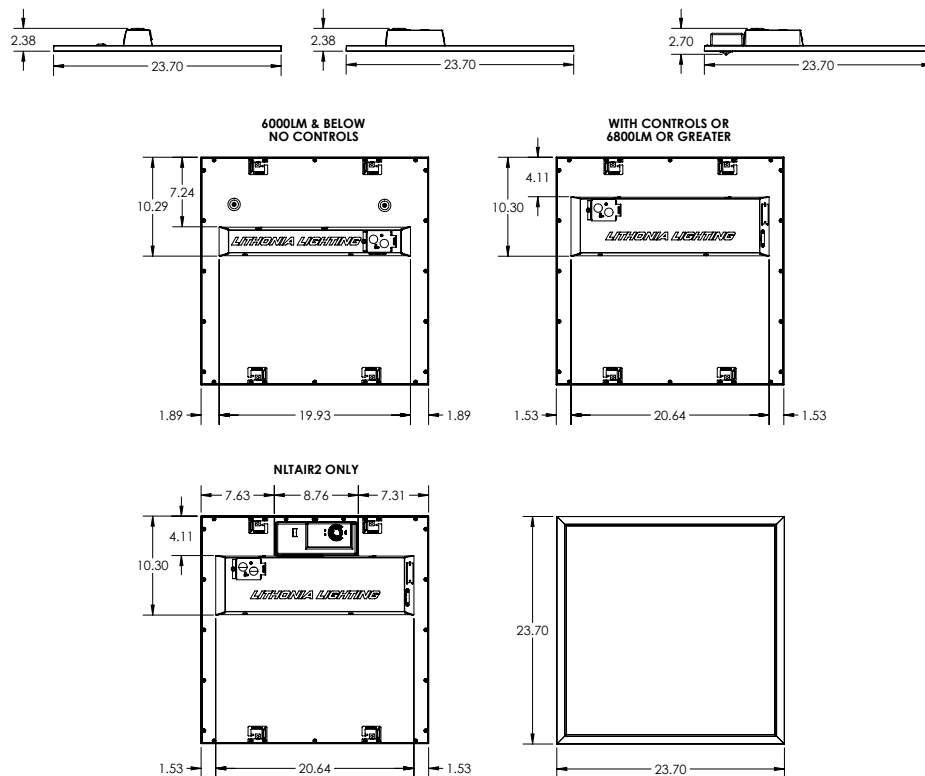

DIMENSIONS (continued)

2X4 Configurations

