



Catalog Number	
Notes	Type

Indoor General Purpose

Cabinet Light

Linkable - T5

T5 Fluorescent



FEATURES & SPECIFICATIONS

INTENDED USE

Provides task or accent illumination in residential and light commercial applications. Ideal for use under cabinets offering shadow-free lighting in kitchens and work areas, in bookcases, display cabinets or above cabinets setting a warm, inviting atmosphere in the kitchen.

ATTRIBUTES

Low profile design, with off/on rocker switch. Can be direct wired or powered by 5' cord-and-plug (Included). Connect multiple fixtures with 13" connector cord (Included).

Rugged post painted low profile steel housing, available in either white or bronze finish. Acrylic white diffuser provides soft widespread illumination with zip-lock design for easy installation, lamp access, cleaning and superior retention. Separate snap on/off service tray for easy maintenance.

Includes (1) linear T5 3500K fluorescent lamp for energy efficiency, superior color rendering and long life.

Standard with residential-grade electronic ballast (120 volt, 60Hz) ensures no flickering and quiet operation without interfering with other home electronics.

For use with non-dimmable switches only.


All mounting hardware included.

LISTING

CUL listed to US and Canadian safety standards and suitable for damp locations. ENERGY STAR® qualified.


WARRANTY

Guaranteed for two years against mechanical defects in manufacture.

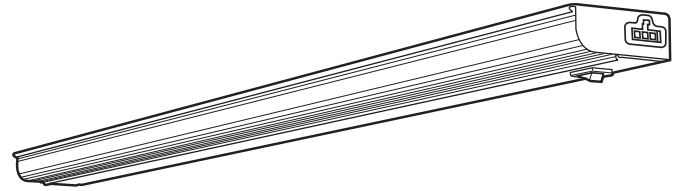

DIMENSIONS

Nominal Size	Lamp Configuration	Model Number	Number of Lamps	(A) Width inches (cm)	(B) Length inches (cm)	(C) Extension* inches (cm)
12"		UC5D 8	(1) 8W linear T5	2-5/8" (6.7)	12-1/4" (30.5)	1" (2.5)
23"		UC5D 14	(1) 14W linear T5	2-5/8" (6.7)	22-3/4" (57.8)	1" (2.5)
34"		UC5D 21	(1) 21W linear T5	2-5/8" (6.7)	34-1/2" (87.6)	1" (2.5)

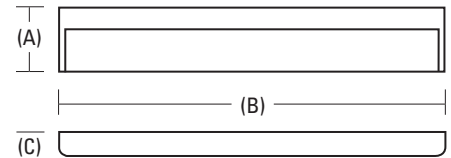

* Extension from ceiling

All dimensions are in inches (centimeters)

ORDERING INFORMATION

Example: UC5D 8 120 LP M6

Choose the boldface catalog nomenclature that best suits your needs and write it on the appropriate line. Order accessories and replacement parts as separate catalog numbers.

Model Number ^{1,2,3}	120 Ballast/Voltage	LP Lamp Included	Finish	M6 Master Pack
UC5D 8 12" - (1) 8W T5 lamp	120 120 volt electronic ballast (standard)	LP Standard	(blank) White BZ Bronze	M6 (6) unit cartons per master pack
UC5D 14 23" - (1) 14W T5 lamp				
UC5D 21 34" - (1) 21W T5 lamp				

Accessories/Replacement parts⁴

UCD JB R12	Splice box - allows for quick and easy direct wiring
UC ERC R12	1-1/8" row connector for end-to-end connections
UC ERC24 R12	24" connector cord for longer length connections
UCH WW C R12	18" white cord cover to conceal cord

Notes:

1. **INCLUDES** - Linear T5 fluorescent lamp.
2. Use with non-dimmable switches only.
3. Maximum quantity of cabinet fixtures that can be connected from a single power source can not exceed 540 watts from the lamp wattage.
4. Resale packs must be ordered in increments of 12.

Cabinet Light T5 Fluorescent

PHOTOMETRICS

Full photometric data report available within 2 weeks from request. Consult factory.

