

## FEATURES & SPECIFICATIONS

**INTENDED USE** — Recessed housing rated IC or Non-IC. For remodel construction only.

Approved for factory assembled wiring only.

Approved for direct burial in insulation.

**CONSTRUCTION** — Air-tight standard. Tested to meet current energy codes.

Aluminum housing with three remodel clips for installation in existing plaster, sheet rock or mechanical ceiling.

Heavy-gauge galvanized steel raceway arm.

Galvanized steel junction box with four built-in Romex clamps. Five 1/2" knockouts with slots for prout. Not suitable for pulling wires.

Rated for 90°C.

Ground wire provided.

Removable J-box doors for easy access.

**ELECTRICAL** — Durable medium base porcelain socket with nickel-plated copper alloy screw shell and contact.

Socket clips to top of housing to prevent paint overspray in socket screw shell.

Socket attaches to reflector to ensure proper and consistent lamp position.

Thermal protection provided against improper lamp usage.

120 volt only.

**INSTALLATION** — Air-tight housing suitable for air-tight installations. Refer to energy codes for proper installations.

2x8 and 2x6 existing ceiling or T-bar ceiling panel installation.

Clip adjustment on housing (up to 1/2") allows for flush mounting with ceiling face.

**LISTINGS** — UL Listed to US and Canadian safety standards.

Damp location listed.

See trim selection for wet location listed.

Note: Specifications subject to change without notice.

Catalog  
Number

Notes

Type

4" Housing

**L3R**

INCANDESCENT  
IC/Non-IC  
Remodel Construction



### Specifications


Height: 5-1/2 (14.0)

Length: 10-1/8 (25.7)

Width: 4-1/2 (11.4)

Ceiling opening: 4-1/4 (10.8)

Ceiling cutout template: 4.01

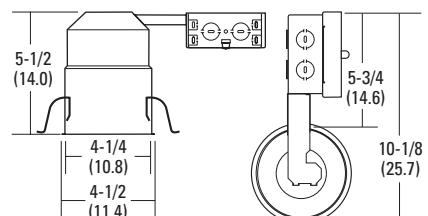

All dimensions are inches (centimeters) unless otherwise specified.

### ORDERING INFORMATION

For shortest lead times, configure product using **standard options (shown in bold)**.

**Example: L3R R6**

L3R		
Series	Options	Packaging
<b>L3R</b>	<u>Shipped installed in fixture</u> PHC Poke-home wire connector	R6 Resale pack of six U Unit pack (non-stock)

Accessories: Order as separate catalog number.	
ATK3 R6	Airtight trim kit

### Note

See trim summary on reverse side for maximum wattages.

# 3 Series 4" Incandescent L3R Full Reflector Trims

Description Catalog number	Maximum wattage <sup>1</sup> Sheet number	Description Catalog number	Maximum wattage <sup>1</sup> Sheet number
<b>General/Task</b>			
Open Narrow Flange <b>301</b> White		Eyeball Narrow Flange <b>3E1</b> White	
<b>301A</b> Clear diffuse		<b>3E1BN</b> Brushed nickel	
<b>301AZ</b> Clear specular anodized		<b>3E1BZA</b> Antique bronze	
<b>301BLZ</b> Black specular anodized		<b>3E1ORB</b> Oil-rubbed bronze	
<b>301BN</b> Brushed nickel			
<b>301BZA</b> Antique bronze			
<b>301ORB</b> Oil-rubbed bronze			
<i>IC</i>	30 R20 35 PAR20		50 PAR20 50 R20
<i>Non IC</i>	50 PAR20		
<b>Accent/Wallwash</b>			
Baffle Narrow Flange <b>3B1W</b> White		Wallwash Narrow Flange <b>3W1</b> White	
<i>IC</i>	50 PAR20 50 R20		50 R20 50 PAR20
Baffle Narrow Flange <b>3B1</b> Black		Pinhole Narrow Flange <b>3S1</b> White	
<b>3B1BN</b> Brushed nickel		<i>IC</i>	35 PAR20
<b>3B1BZA</b> Antique bronze		<i>Non IC</i>	50 PAR20
<b>3B1ORB</b> Oil-rubbed bronze			
<i>IC</i>	35 PAR20		
<i>Non IC</i>	50 PAR20		
<b>Wet Location<sup>2</sup></b>			
Baffle Deep Narrow Flange <b>3B2</b> Black		Wetlite Narrow Flange <b>3H20</b> White	
<i>Non IC</i>	50 PAR20 50 R20	<b>3H20BN</b> Brushed nickel	
		<b>3H20BZA</b> Antique bronze	
		<b>3H20ORB</b> Oil-rubbed bronze	
		<i>IC</i>	75 PAR30 Short Neck
Baffle Deep Narrow Flange <b>3B2W</b> White			
<i>IC</i>	30 R20 35 PAR20		
<i>Non IC</i>	50 R20		

## Notes

- 1 Maximum wattage listed. Lower wattage lamps may be used.
- 2 Wetlite trim is wet location listed and outdoor rated. All other trims are damp location.