

Catalog Number
Notes
Type

## FEATURES & SPECIFICATIONS

### INTENDED USE

Provides years of maintenance-free illumination for outdoor use in residential & commercial applications. Ideal for applications such as lighting walkways and stairways for safety and security.

### CONSTRUCTION

Cast-aluminum housing with corrosion-resistant paint in either dark bronze or white finish.

ADA compliant.

### OPTICS

4000K CCT LEDs.

Polycarbonate lens protects the LED from moisture, dirt and other contaminants.

**LUMEN MAINTENANCE:** The LED will deliver 70% of its initial lumens at 50,000 hour average LED life. See Lighting Facts label on page 2 for performance details.

### ELECTRICAL

MVOLT driver operates on any line voltage from 120-277V

Operating temperature -30°C to 40°C.

1KV surge protection standard.

### INSTALLATION

Surface mounts to universal junction box (provided by others).

### LISTINGS

UL Listed to U.S. and Canadian safety standards for wet locations.

Tested in accordance with IESNA LM-79 and LM-80 standards.

### WARRANTY

Five-year limited warranty. Full warranty terms located at

[www.AcuityBrands.com/CustomerResources/Terms\\_and\\_Conditions.aspx](http://www.AcuityBrands.com/CustomerResources/Terms_and_Conditions.aspx).

Note: Specifications are subject to change without notice.

Actual performance may differ as a result of end-user environment and application.

Outdoor General Purpose


# OLLWD & OLLWU

LED WALL CYLINDER LIGHT



### Specifications

All dimensions are inches (centimeters)

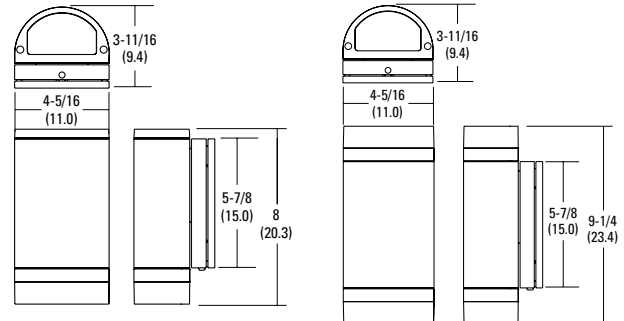

### ORDERING INFORMATION

For shortest lead times, configure products using **bolded options**.

**Example:** OLLWD




Series	Color temperature (CCT)	Voltage	Finish
<b>OLLWD</b> Downlight	<b>(blank)</b> 4000K	<b>(blank)</b> MVOLT (120V-277V)	<b>DDB</b> Dark bronze
<b>OLLWU</b> Up & downlight			<b>WH</b> White

# OLLWD & OLLWU LED Wall Cylinder Light




## PHOTOMETRICS

To see complete photometric reports or download .ies files for this product, visit Lithonia Lighting's Outdoor LED homepage  
 Tested in accordance with IESNA LM-79 and LM-80 standards.

## OLLWD

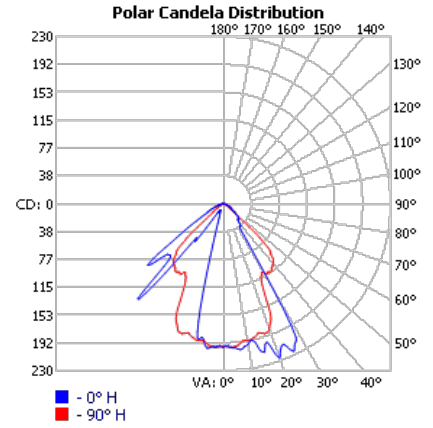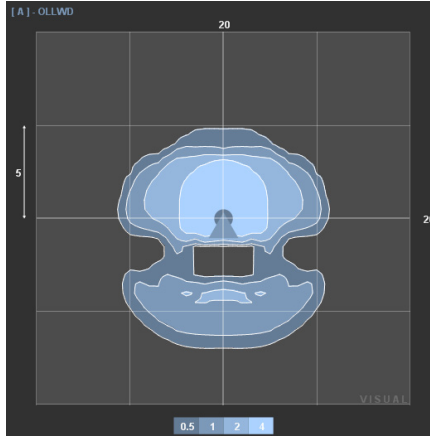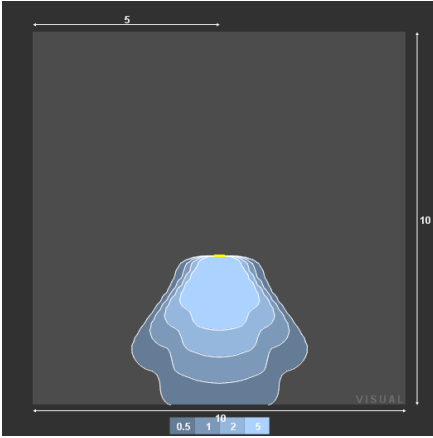

## OLLWU

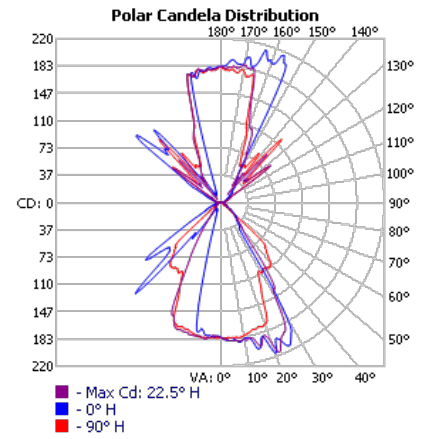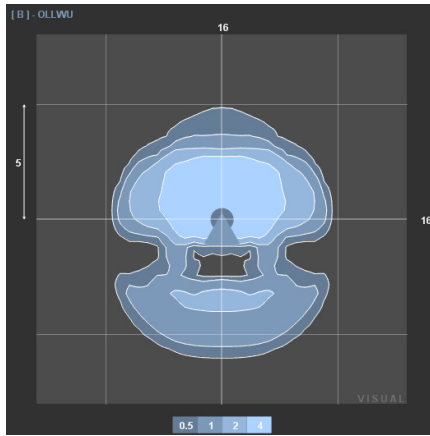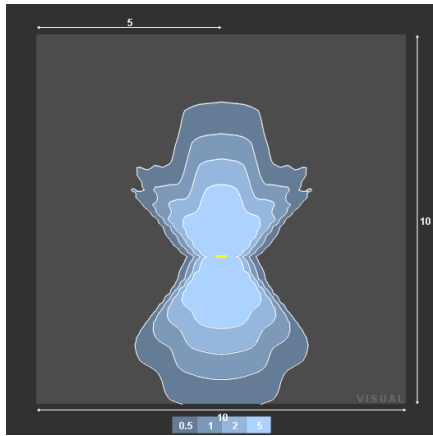

### OLLWD

Acuity Brands Lighting

**LED lighting facts**  
 A Program of the U.S. DOE

Light Output (Lumens)	270
Watts	9
Lumens per Watt (Efficacy)	30

Color Accuracy	75
Color Rendering Index (CRI)	

Light Color  
 Correlated Color Temperature (CCT): 4000 (Bright White)

2700K 3000K Bright White 4500K Daylight 6500K

All results are according to IESNA LM-79-2008: Approved Method for the Electrical and Photometric Testing of Solid-State Lighting. The U.S. Department of Energy (DOE) verifies product test data and results.

Visit [www.lightingfacts.com](http://www.lightingfacts.com) for the Label Reference Guide.

Registration Number: NJSM-4KR87Z (6/28/2012)  
 Model Number: OLLWD  
 Type: Outdoor wall-mounted porch lights

### OLLWU

Acuity Brands Lighting

**LED lighting facts**  
 A Program of the U.S. DOE

Light Output (Lumens)	500
Watts	14
Lumens per Watt (Efficacy)	34

Color Accuracy	74
Color Rendering Index (CRI)	

Light Color  
 Correlated Color Temperature (CCT): 4000 (Bright White)

2700K 3000K Bright White 4500K Daylight 6500K

All results are according to IESNA LM-79-2008: Approved Method for the Electrical and Photometric Testing of Solid-State Lighting. The U.S. Department of Energy (DOE) verifies product test data and results.

Visit [www.lightingfacts.com](http://www.lightingfacts.com) for the Label Reference Guide.

Registration Number: NJSM-L5HACV (6/25/2012)  
 Model Number: OLLWU  
 Type: Outdoor wall-mounted porch lights



OLLWD-OLLWU